

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231	Казань (843)206-01-48	Новокузнецк (3843)20-46-81	Смоленск (4812)29-41-54
Архангельск (8182)63-90-72	Калининград (4012)72-03-81	Новосибирск (383)227-86-73	Сочи (862)225-72-31
Астрахань (8512)99-46-04	Калуга (4842)92-23-67	Омск (3812)21-46-40	Ставрополь (8652)20-65-13
Барнаул (3852)73-04-60	Кемерово (3842)65-04-62	Орел (4862)44-53-42	Сургут (3462)77-98-35
Белгород (4722)40-23-64	Киров (8332)68-02-04	Оренбург (3532)37-68-04	Тверь (4822)63-31-35
Брянск (4832)59-03-52	Краснодар (861)203-40-90	Пенза (8412)22-31-16	Томск (3822)98-41-53
Владивосток (423)249-28-31	Красноярск (391)204-63-61	Пермь (342)205-81-47	Тула (4872)74-02-29
Волгоград (844)278-03-48	Курск (4712)77-13-04	Ростов-на-Дону (863)308-18-15	Тюмень (3452)66-21-18
Вологда (8172)26-41-59	Липецк (4742)52-20-81	Рязань (4912)46-61-64	Ульяновск (8422)24-23-59
Воронеж (473)204-51-73	Магнитогорск (3519)55-03-13	Самара (846)206-03-16	Уфа (347)229-48-12
Екатеринбург (343)384-55-89	Москва (495)268-04-70	Санкт-Петербург (812)309-46-40	Хабаровск (4212)92-98-04
Иваново (4932)77-34-06	Мурманск (8152)59-64-93	Саратов (845)249-38-78	Челябинск (351)202-03-61
Ижевск (3412)26-03-58	Набережные Челны (8552)20-53-41	Севастополь (8692)22-31-93	Череповец (8202)49-02-64
Иркутск (395)279-98-46	Нижний Новгород (831)429-08-12	Симферополь (3652)67-13-56	Ярославль (4852)69-52-93
Россия (495)268-04-70	Киргизия (996)312-96-26-47	Казахстан (7172)727-132	

UV-C STERILON HEPA

GENERAL CARD



TECHNICAL PARAMETERS

Nominal power [W]:	216.00
Supply voltage [V]:	220 - 240
Electrical protection class:	I
Material of the body:	carbon steel
Colour of the body:	black/gold; white/silver
Dimensions (H/W/T/S) [mm]:	724/260/260
Ingress protection:	IP20
Mounting version:	detached
Max volume of the disinfected room [m3]:	300.00
Warranty [years]:	2

CHARACTERISTICS

UV-C STERILON HEPA flow luminaires emitting ultraviolet (UV-C) light are one of the most effective (99.9%) devices capable of safely removing viruses, bacteria, and mold from the environment in the presence of people and animals.

Air-flow adjustment (noise level):

25% fan power = ~70 m3/h (~38dB)

50% fan power = ~90 m3/h (~44dB)

75% fan power = ~110 m3/h (~48dB)

100% fan power = ~200 m3/h (~51,5dB)


APPLICATION

Luminaires are recommended for use in service-providing facilities (hair and beauty salons), health care facilities, hotels, restaurants, public administration, educational and care facilities.

UV-C STERILON HEPA

GENERAL CARD

AVAILABLE VERSIONS

 Click index >>, to see details

Nominal power [W]	Service life of the UV-C radiation source [h]	Colour of the body	Plug type	Cable length [m]	Air flow [m3 / h]	ECO mode adjustment	Working time counter	HEPA filter holder	Net weight of the luminaire [kg]	ECO mode	Index
216	9000	white/silver	UNI-SCHUKO	3	200	yes	yes	yes	15.720	yes	>> 245985
216	9000	black/gold	UNI-SCHUKO	3	200	yes	yes	yes	14.590	yes	>> 245992

UV-C STERILON HEPA


GENERAL CARD

ACCESSORIES AVAILABLE

index	Name
WL36500	PL-L UV-C 36W 2G11 OSR fluorescent lamp
244315	HEPA H13 + CARBON filter

UV-C STERILON HEPA

GENERAL CARD

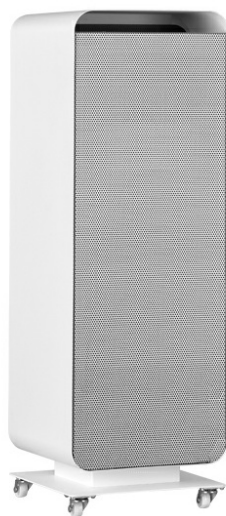

TECHNICAL PARAMETERS

Nominal power [W]:	216.00
Supply voltage [V]:	220 - 240
Electrical protection class:	I
Material of the body:	carbon steel
Colour of the body:	black/gold; white/silver
Dimensions (H/W/T/S) [mm]:	724/260/260
Ingress protection:	IP20
Mounting version:	detached
Max volume of the disinfected room [m3]:	300.00
Warranty [years]:	2

CHARACTERISTICS

UV-C STERILON HEPA flow luminaires emitting ultraviolet (UV-C) light are one of the most effective (99.9%) devices capable of safely removing viruses, bacteria, and mold from the environment in the presence of people and animals.

Air-flow adjustment (noise level):

25% fan power = ~70 m3/h (~38dB)

50% fan power = ~90 m3/h (~44dB)

75% fan power = ~110 m3/h (~48dB)

100% fan power = ~200 m3/h (~51,5dB)


APPLICATION

Luminaires are recommended for use in service-providing facilities (hair and beauty salons), health care facilities, hotels, restaurants, public administration, educational and care facilities.

UV-C STERILON HEPA

GENERAL CARD

AVAILABLE VERSIONS

 Click index >>, to see details

Nominal power [W]	Service life of the UV-C radiation source [h]	Colour of the body	Plug type	Cable length [m]	Air flow [m3 / h]	ECO mode adjustment	Working time counter	HEPA filter holder	Net weight of the luminaire [kg]	ECO mode	Index
216	9000	white/silver	UNI-SCHUKO	3	200	yes	yes	yes	15.720	yes	>> 245985
216	9000	black/gold	UNI-SCHUKO	3	200	yes	yes	yes	14.590	yes	>> 245992

UV-C STERILON HEPA

GENERAL CARD

ACCESSORIES AVAILABLE

index	Name
WL36500	PL-L UV-C 36W 2G11 OSR fluorescent lamp
244315	HEPA H13 + CARBON filter

UV-C STERILON CAR 18W/12V

GENERAL CARD



TECHNICAL PARAMETERS

Nominal power [W]:	18.00
Supply voltage [V]:	12
Electrical protection class:	III
Material of the body:	carbon steel
Colour of the body:	white / endcap gray
Dimensions (H/W/T/S) [mm]:	407/145/148
Ingress protection:	IP20
Mounting version:	in the car
Warranty [years]:	2

CHARACTERISTICS

UV-C STERILON CAR luminaires emitting ultraviolet (UV-C) light are one of the most effective devices capable of removing viruses, bacteria, mold from the surface or destroying the DNA or RNA of any exposed microorganisms.

APPLICATION

Luminaires are dedicated for installation inside means of transport (taxis, buses, mini-buses, coaches, trains, trams).

UV-C STERILON CAR 18W/12V

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

Nominal power [W]	Service life of the UV-C radiation source [h]	Plug type	Cable length [m]	Electrical protection class	Supply voltage [V]	Air flow [m3 / h]	Working time counter	Index
18	9000	car 12V	5	III	12	84	yes	>> 243769

UV-C STERILON CAR 18W/12V

GENERAL CARD

ACCESSORIES AVAILABLE

index	Name
244339	Set of 5 x Sterilon AIR G1 3x127x135mm pre-filter
160UV003	TC-L UV-C 18W 2G11 TUV fluorescent lamp

UV-C STERILON CAR 18W/24V

GENERAL CARD



TECHNICAL PARAMETERS

Nominal power [W]:	18.00
Supply voltage [V]:	24
Electrical protection class:	III
Material of the body:	carbon steel
Colour of the body:	white / endcap gray
Dimensions (H/W/T/S) [mm]:	407/145/148
Ingress protection:	IP20
Mounting version:	in the car
Warranty [years]:	2

CHARACTERISTICS

UV-C STERILON CAR luminaires emitting ultraviolet (UV-C) light are one of the most effective devices capable of removing viruses, bacteria, mold from the surface or destroying the DNA or RNA of any exposed microorganisms.

APPLICATION

Luminaires are dedicated for installation inside means of transport (taxis, buses, mini-buses, coaches, trains, trams).

UV-C STERILON CAR 18W/24V

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

Nominal power [W]	Service life of the UV-C radiation source [h]	Plug type	Cable length [m]	Electrical protection class	Supply voltage [V]	Air flow [m3 / h]	Working time counter	Index
18	9000	car 24V	5	III	24	84	yes	>> 244391

UV-C STERILON CAR 18W/24V

GENERAL CARD

ACCESSORIES AVAILABLE

index	Name
244339	Set of 5 x Sterilon AIR G1 3x127x135mm pre-filter
160UV003	TC-L UV-C 18W 2G11 TUV fluorescent lamp

UV-C STERILON CAR 18W/230V

GENERAL CARD



TECHNICAL PARAMETERS

Nominal power [W]:	18.00
Supply voltage [V]:	220 - 240
Electrical protection class:	I
Material of the body:	carbon steel
Colour of the body:	white / endcap gray
Dimensions (H/W/T/S) [mm]:	407/145/148
Ingress protection:	IP20
Mounting version:	in the car

CHARACTERISTICS

UV-C STERILON CAR luminaires emitting ultraviolet (UV-C) light are one of the most effective devices capable of removing viruses, bacteria, mold from the surface or destroying the DNA or RNA of any exposed microorganisms.

APPLICATION

Luminaires are dedicated for installation inside means of transport (taxis, buses, mini-buses, coaches, trains, trams).

UV-C STERILON CAR 18W/230V

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

Nominal power [W]	Service life of the UV-C radiation source [h]	Plug type	Cable length [m]	Electrical protection class	Supply voltage [V]	Air flow [m3 / h]	Working time counter	Index
18	9000	UNI- SCHUKO	3	I	220 - 240	84	yes	>> 243752

UV-C STERILON CAR 18W/230V

GENERAL CARD

ACCESSORIES AVAILABLE

index	Name
244339	Set of 5 x Sterilon AIR G1 3x127x135mm pre-filter
160UV003	TC-L UV-C 18W 2G11 TUV fluorescent lamp

UV-C STERILON AIR LIGHT 72W/Z4

GENERAL CARD



TECHNICAL PARAMETERS

Nominal power [W]:	288.00
Supply voltage [V]:	220 - 240
Electrical protection class:	I
Material of the body:	carbon steel
Colour of the body:	white / endcap gray
Dimensions (H/W/T/S) [mm]:	1082/471/471
Ingress protection:	IP20
Mounting version:	version on a mobile stand
Max volume of the disinfected room [m3]:	440.00
Warranty [years]:	2

CHARACTERISTICS

STERILON AIR LIGHT Z4 UV-C flow luminaires in the form of a set of disinfection luminaires integrated with a stand with wheels. Luminaires emitting ultraviolet (UV-C) light are one of the most effective devices capable of removing viruses, bacteria, mold from the surface or destroying the DNA or RNA of any exposed microorganisms. The luminaires are equipped with a 3-meter power cord and an on-off switch.


APPLICATION

Luminaires are recommended for use in large service-providing facilities (hair and beauty salons), healthcare facilities, hotels, restaurants, public administration, educational and care facilities, gyms.

UV-C STERILON AIR LIGHT 72W/Z4

GENERAL CARD

AVAILABLE VERSIONS

 Click index >>, to see details

Nominal power [W]	Service life of the UV-C radiation source [h]	Plug type	Cable length [m]	Electrical protection class	Supply voltage [V]	Air flow [m3 / h]	Working time counter	Index
288	9000	UNI- SCHUKO	3	I	220 - 240	440	yes	>> 244308

UV-C STERILON AIR LIGHT 72W/Z4

GENERAL CARD

ACCESSORIES AVAILABLE

index	Name
WL36500	PL-L UV-C 36W 2G11 OSR fluorescent lamp
244339	Set of 5 x Sterilon AIR G1 3x127x135mm pre-filter

UV-C STERILON AIR LIGHT 144W/Z4

GENERAL CARD



TECHNICAL PARAMETERS

Nominal power [W]:	576.00
Supply voltage [V]:	220 - 240
Electrical protection class:	I
Material of the body:	carbon steel
Colour of the body:	white / endcap gray
Dimensions (H/W/T/S) [mm]:	1082/471/471
Ingress protection:	IP20
Mounting version:	version on a mobile stand
Max volume of the disinfected room [m3]:	800.00
Warranty [years]:	2

CHARACTERISTICS

STERILON AIR LIGHT Z4 UV-C flow luminaires in the form of a set of disinfection luminaires integrated with a stand with wheels. Luminaires emitting ultraviolet (UV-C) light are one of the most effective devices capable of removing viruses, bacteria, mold from the surface or destroying the DNA or RNA of any exposed microorganisms. The luminaires are equipped with a 3-meter power cord and an on-off switch.


APPLICATION

Luminaires are recommended for use in large service-providing facilities (hair and beauty salons), healthcare facilities, hotels, restaurants, public administration, educational and care facilities, gyms.

UV-C STERILON AIR LIGHT 144W/Z4

GENERAL CARD

AVAILABLE VERSIONS

 Click index >>, to see details

Nominal power [W]	Service life of the UV-C radiation source [h]	Plug type	Cable length [m]	Electrical protection class	Supply voltage [V]	Air flow [m3 / h]	Working time counter	Index
576	9000	UNI- SCHUKO	3	I	220 - 240	800	yes	>> 244278

UV-C STERILON AIR LIGHT 144W/Z4

GENERAL CARD

ACCESSORIES AVAILABLE

index	Name
WL36500	PL-L UV-C 36W 2G11 OSR fluorescent lamp
244339	Set of 5 x Sterilon AIR G1 3x127x135mm pre-filter

UV-C STERILON AIR 72W/Z1

GENERAL CARD



TECHNICAL PARAMETERS

Nominal power [W]:	72.00
Supply voltage [V]:	220 - 240
Electrical protection class:	I
Material of the body:	carbon steel
Colour of the body:	white / endcap gray
Dimensions (H/W/T/S) [mm]:	1082/471/471
Ingress protection:	IP20
Mounting version:	version on a mobile stand
Max volume of the disinfected room [m3]:	90.00
Warranty [years]:	2

CHARACTERISTICS

STERILON AIR Z1 UV-C flow luminaires emitting ultraviolet (UV-C) light are one of the most effective devices capable of removing viruses, bacteria, mold from the surface or destroying the DNA or RNA of any exposed microorganisms. Thanks to the movable base fitted as standard, the luminaire is easy to move. Selected versions are equipped with a 3-meter power cord and a switch. The luminaire is equipped with ECO mode, which makes its operation quieter.

APPLICATION

Luminaires are recommended for use in service-providing facilities (hair and beauty salons), healthcare facilities, hotels, restaurants, public administration, educational and care facilities, gyms.

UV-C STERILON AIR 72W/Z1

GENERAL CARD

AVAILABLE VERSIONS

 Click index >>, to see details

Nominal power [W]	Service life of the UV-C radiation source [h]	Plug type	Cable length [m]	Electrical protection class	Supply voltage [V]	Air flow in ECO mode [m3 / h]	Air flow [m3 / h]	ECO mode	Working time counter	Net weight of the luminaire [kg]	Index
72	9000	UNI-SCHUKO	3	I	220 - 240	110	160	yes	yes	4	>> 243691

UV-C STERILON AIR 72W/Z1

GENERAL CARD

ACCESSORIES AVAILABLE

index	Name
WL36500	PL-L UV-C 36W 2G11 OSR fluorescent lamp
244339	Set of 5 x Sterilon AIR G1 3x127x135mm pre-filter

UV-C STERILON AIR 144W/Z1

GENERAL CARD



TECHNICAL PARAMETERS

Nominal power [W]:	144.00
Supply voltage [V]:	220 - 240
Electrical protection class:	I
Material of the body:	carbon steel
Colour of the body:	white / endcap gray
Dimensions (H/W/T/S) [mm]:	1082/471/471
Ingress protection:	IP20
Mounting version:	version on a mobile stand
Max volume of the disinfected room [m3]:	150.00
CE certificate:	41/2021

CHARACTERISTICS

STERILON AIR Z1 UV-C flow luminaires emitting ultraviolet (UV-C) light are one of the most effective devices capable of removing viruses, bacteria, mold from the surface or destroying the DNA or RNA of any exposed microorganisms. Thanks to the movable base fitted as standard, the luminaire is easy to move. Selected versions are equipped with a 3-meter power cord and a switch. The luminaire is equipped with ECO mode, which makes its operation quieter.

APPLICATION

Luminaires are recommended for use in service-providing facilities (hair and beauty salons), healthcare facilities, hotels, restaurants, public administration, educational and care facilities, gyms.

UV-C STERILON AIR 144W/Z1

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

Nominal power [W]	Service life of the UV-C radiation source [h]	Plug type	Cable length [m]	Electrical protection class	Supply voltage [V]	Air flow in ECO mode [m3 / h]	Air flow [m3 / h]	ECO mode	Working time counter	Index
144	9000	UNI-SCHUKO	3	I	220 - 240	110	220	yes	yes	>> 244261

UV-C STERILON AIR 144W/Z1

GENERAL CARD

ACCESSORIES AVAILABLE

index	Name
WL36500	PL-L UV-C 36W 2G11 OSR fluorescent lamp
244339	Set of 5 x Sterilon AIR G1 3x127x135mm pre-filter

UV-C STERILON AIR LIGHT 72W

GENERAL CARD



TECHNICAL PARAMETERS

Nominal power [W]:	72.00
Supply voltage [V]:	220 - 240
Electrical protection class:	I
Material of the body:	carbon steel
Colour of the body:	white / endcap gray
Dimensions (H/W/T/S) [mm]:	600/148/148
Ingress protection:	IP20
Mounting version:	investment version to be connected to the electrical installation; wall version with a cord for the socket
Max volume of the disinfected room [m3]:	75.00
Warranty [years]:	2

CHARACTERISTICS

UV-C STERILON AIR LIGHT flow luminaires are intended for wall mounting. Luminaires emitting ultraviolet (UV-C) light are one of the most effective devices capable of removing viruses, bacteria, mold from the surface or destroying the DNA or RNA of any exposed microorganisms. Luminaires are available with a 3-meter power cord and without a cord (the so-called investment version).


APPLICATION

Luminaires are recommended for use in service-providing facilities (hair and beauty salons), health care facilities, hotels, restaurants, public administration, educational and care facilities.

UV-C STERILON AIR LIGHT 72W

GENERAL CARD

AVAILABLE VERSIONS

 Click index >>, to see details

Nominal power [W]	Service life of the UV-C radiation source [h]	Plug type	Cable length [m]	Electrical protection class	Supply voltage [V]	Air flow [m3 / h]	Working time counter	Net weight of the luminaire [kg]	Index
72	9000	UNI-SCHUKO	3	I	220 - 240	110	yes	4.400	>> 240584
72	9000		0	I	220 - 240	110	yes	3.280	>> 240560

UV-C STERILON AIR LIGHT 72W

GENERAL CARD

ACCESSORIES AVAILABLE

index	Name
WL36500	PL-L UV-C 36W 2G11 OSR fluorescent lamp
244339	Set of 5 x Sterilon AIR G1 3x127x135mm pre-filter

UV-C STERILON AIR LIGHT 144W

GENERAL CARD



TECHNICAL PARAMETERS

Nominal power [W]:	144.00
Supply voltage [V]:	220 - 240
Electrical protection class:	I
Material of the body:	carbon steel
Colour of the body:	white / endcap gray
Dimensions (H/W/T/S) [mm]:	600/148/148
Ingress protection:	IP20
Mounting version:	investment version to be connected to the electrical installation; wall version with a cord for the socket
Max volume of the disinfected room [m3]:	120.00
Warranty [years]:	2

CHARACTERISTICS

UV-C STERILON AIR LIGHT flow luminaires are intended for wall mounting. Luminaires emitting ultraviolet (UV-C) light are one of the most effective devices capable of removing viruses, bacteria, mold from the surface or destroying the DNA or RNA of any exposed microorganisms. Luminaires are available with a 3-meter power cord and without a cord (the so-called investment version).


APPLICATION

Luminaires are recommended for use in service-providing facilities (hair and beauty salons), health care facilities, hotels, restaurants, public administration, educational and care facilities.

UV-C STERILON AIR LIGHT 144W

GENERAL CARD

AVAILABLE VERSIONS

 Click index >>, to see details

Nominal power [W]	Service life of the UV-C radiation source [h]	Plug type	Cable length [m]	Electrical protection class	Supply voltage [V]	Air flow [m3 / h]	Working time counter	Net weight of the luminaire [kg]	Index
144	9000	UNI-SCHUKO	3	I	220 - 240	160	yes	4.900	>> 240638
144	9000		0	I	220 - 240	160	yes	4.900	>> 240577

UV-C STERILON AIR LIGHT 144W

GENERAL CARD

ACCESSORIES AVAILABLE

index	Name
WL36500	PL-L UV-C 36W 2G11 OSR fluorescent lamp
244339	Set of 5 x Sterilon AIR G1 3x127x135mm pre-filter

UV-C STERILON AIR 72W

GENERAL CARD



TECHNICAL PARAMETERS

Nominal power [W]:	72.00
Supply voltage [V]:	220 - 240
Electrical protection class:	I
Material of the body:	carbon steel
Colour of the body:	white / endcap gray
Dimensions (H/W/T/S) [mm]:	600/148/148; 679/148/148; 717/230/230
Ingress protection:	IP20
Mounting version:	investment version to be connected to the electrical installation; standing version with a cable for the socket; version on trolley / wheels and handle; wall version with a cord for the socket
Max volume of the disinfected room [m3]:	90.00
Warranty [years]:	2

CHARACTERISTICS

V-C STERILON AIR luminaires emitting ultraviolet (UV-C) light are one of the most effective devices capable of removing viruses, bacteria, mold from the surface or destroying the DNA or RNA of any exposed microorganisms. The luminaires are intended for wall mounting but are also available in a free-standing version. Selected versions are equipped with a 3-meter power cord and a switch. The luminaire is equipped with ECO mode, which makes its operation quieter.


APPLICATION

Luminaires are recommended for use in service-providing facilities (hair and beauty salons), health care facilities, hotels, restaurants, public administration, educational and care facilities.

UV-C STERILON AIR 72W

GENERAL CARD

AVAILABLE VERSIONS

 Click index >>, to see details

Nominal power [W]	Service life of the UV-C radiation source [h]	Plug type	Cable length [m]	Max volume of the disinfected room [m3]	ECO mode	Working time counter	Protection against opening	Mounting version	Index
72	9000	UNI-SCHUKO	3	90	yes	yes	yes	wall version with a cord for the socket	>> 240621
72	9000	UNI-SCHUKO	3	90	yes	yes	yes	investment version to be connected to the electrical installation	>> 240607
72	9000	UNI-SCHUKO	3	90	yes	yes	yes	standing version with a cable for the socket	>> 240645
72	9000	UNI-SCHUKO	3	90	yes	yes	yes	version on trolley / wheels and handle	>> 240447

UV-C STERILON AIR 72W

GENERAL CARD

ACCESSORIES AVAILABLE

index	Name
WL36500	PL-L UV-C 36W 2G11 OSR fluorescent lamp
244339	Set of 5 x Sterilon AIR G1 3x127x135mm pre-filter

UV-C STERILON AIR 144W

GENERAL CARD



TECHNICAL PARAMETERS

Nominal power [W]:	144.00
Supply voltage [V]:	220 - 240
Electrical protection class:	I
Material of the body:	carbon steel
Colour of the body:	white / endcap gray
Dimensions (H/W/T/S) [mm]:	600/148/148; 679/148/148; 717/230/230
Ingress protection:	IP20
Mounting version:	investment version to be connected to the electrical installation; standing version with a cable for the socket; version on trolley / wheels and handle; wall version with a cord for the socket
Max volume of the disinfected room [m3]:	150.00
Warranty [years]:	2

CHARACTERISTICS

UV-C STERILON AIR luminaires emitting ultraviolet (UV-C) light are one of the most effective devices capable of removing viruses, bacteria, mold from the surface or destroying the DNA or RNA of any exposed microorganisms. The luminaires are intended for wall mounting but are also available in a free-standing version. Selected versions are equipped with a 3-meter power cord and a switch. The luminaire is equipped with ECO mode, which makes its operation quieter.


APPLICATION

Luminaires are recommended for use in service-providing facilities (hair and beauty salons), health care facilities, hotels, restaurants, public administration, educational and care facilities.

UV-C STERILON AIR 144W

GENERAL CARD

AVAILABLE VERSIONS

 Click index >>, to see details

Nominal power [W]	Service life of the UV-C radiation source [h]	Plug type	Cable length [m]	Max volume of the disinfected room [m3]	ECO mode	Working time counter	Protection against opening	Net weight of the luminaire [kg]	Mounting version	Index
144	9000	UNI-SCHUKO	3	150	yes	yes	yes	4.100	wall version with a cord for the socket	>> 240591
144	9000		0	150	yes	yes	yes	4.100	investment version to be connected to the electrical installation	>> 240614
144	9000	UNI-SCHUKO	3	150	yes	yes	yes	5.280	standing version with a cable for the socket	>> 240652
144	9000	UNI-SCHUKO	3	150	yes	yes	yes	5.330	version on trolley / wheels and handle	>> 240997

UV-C STERILON AIR 144W


GENERAL CARD

ACCESSORIES AVAILABLE

index	Name
WL36500	PL-L UV-C 36W 2G11 OSR fluorescent lamp
244339	Set of 5 x Sterilon AIR G1 3x127x135mm pre-filter

UV-C STERILON FLOW 72W PREMIUM

GENERAL CARD

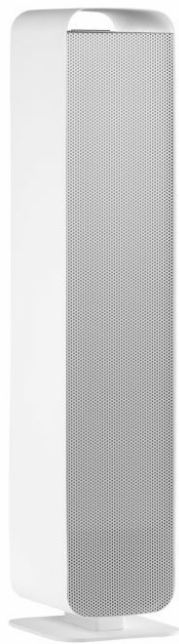

TECHNICAL PARAMETERS

Nominal power [W]:	72.00
Supply voltage [V]:	220 - 240
Electrical protection class:	I
Material of the body:	carbon steel
Colour of the body:	black/gold; white/silver
Dimensions (H/W/T/S) [mm]:	724/160/160
Ingress protection:	IP20
Mounting version:	detached
Version:	dual-purpose
Max volume of the disinfected room [m3]:	75.00
Warranty [years]:	2

CHARACTERISTICS

UV-C STERILON FLOW 72W PREMIUM luminaires emitting ultraviolet (UV-C) light are one of the most effective devices capable of removing viruses, bacteria, fungi from the surface or destroying the DNA or RNA of any exposed microorganisms. It is available as dual-function products. The luminaire is equipped with the ECO mode, which makes it quieter.

APPLICATION

Luminaires are recommended for use in service-providing facilities (hair and beauty salons), health care facilities, hotels, restaurants, public administration, educational and care facilities.

UV-C STERILON FLOW 72W PREMIUM

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

Nominal power [W]	Service life of the UV-C radiation source [h]	Colour of the body	Plug type	Cable length [m]	Max volume of the disinfected room [m3]	ECO mode	Working time counter	HEPA filter holder	Index
72	9000	white/silver	UNI-SCHUKO	3	75	yes	yes	yes	>> 240393
72	9000	black/gold	UNI-SCHUKO	3	75	yes	yes	yes	>> 240959

UV-C STERILON FLOW 72W PREMIUM


GENERAL CARD

ACCESSORIES AVAILABLE

index	Name
WL36500	PL-L UV-C 36W 2G11 OSR fluorescent lamp
240485	Wall bracket STERILON FLOW 72W
243646	Set of guide wheels Sterilon Flow 72W matt white
243677	HEPA H10 filter - set of 5 only for the Flow model
WSAW347	WSAW347 - SterilOn fan dust filter 115x115 PPM 30 1pkg=3pcs
243639	UV-C protective glasses



Set of guide wheels Sterilon Flow 72W matt white (243646)




HEPA H10 filter - set of 5 only for the Flow model (243677)



UV-C protective glasses (243639)

UV-C STERILON FLOW 144W PREMIUM

GENERAL CARD

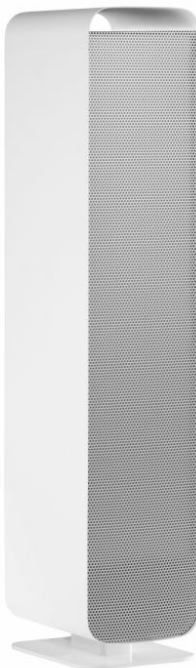

TECHNICAL PARAMETERS

Nominal power [W]:	144.00
Supply voltage [V]:	220 - 240
Electrical protection class:	I
Material of the body:	carbon steel
Colour of the body:	black/gold; white/silver
Dimensions (H/W/T/S) [mm]:	724/160/220
Ingress protection:	IP20
Mounting version:	detached
Version:	dual-purpose
Max volume of the disinfected room [m3]:	120.00
Warranty [years]:	2

CHARACTERISTICS

UV-C STERILON FLOW 144W PREMIUM luminaires emitting ultraviolet (UV-C) light are one of the most effective devices capable of removing viruses, bacteria, fungi from the surface or destroying the DNA or RNA of any exposed microorganisms. It is available as dual-function products. The luminaire is equipped with the ECO mode, which makes it quieter.

APPLICATION

Luminaires are recommended for use in service-providing facilities (hair and beauty salons), health care facilities, hotels, restaurants, public administration, educational and care facilities.

UV-C STERILON FLOW 144W PREMIUM

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

Nominal power [W]	Service life of the UV-C radiation source [h]	Air flow [m3 / h]	Max volume of the disinfected room [m3]	ECO mode	Working time counter	Protection against opening	HEPA filter holder	Index
144	9000	200	120	yes	yes	yes	yes	>> 240409
144	9000	200	120	yes	yes	yes	yes	>> 240966

UV-C STERILON FLOW 144W PREMIUM


GENERAL CARD

ACCESSORIES AVAILABLE

index	Name
WL36500	PL-L UV-C 36W 2G11 OSR fluorescent lamp
240492	Wall bracket STERILON FLOW 144W
243660	Set of guide wheels Sterilon Flow 144W white matt
243677	HEPA H10 filter - set of 5 only for the Flow model
WSAW347	WSAW347 - SterilOn fan dust filter 115x115 PPM 30 1pkg=3pcs
243639	UV-C protective glasses



Set of guide wheels Sterilon Flow 144W white matt (243660)




HEPA H10 filter - set of 5 only for the Flow model (243677)



UV-C protective glasses (243639)

UV-C STERILON FLOW 72W

GENERAL CARD

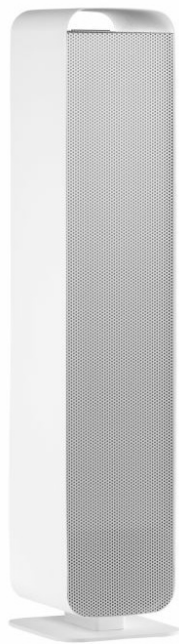

TECHNICAL PARAMETERS

Nominal power [W]:	72.00
Supply voltage [V]:	220 - 240
Electrical protection class:	I
Material of the body:	carbon steel
Colour of the body:	white/silver
Dimensions (H/W/T/S) [mm]:	724/160/160
Ingress protection:	IP20
Mounting version:	detached
Version:	dual-purpose
Max volume of the disinfected room [m3]:	75.00
Warranty [years]:	2

CHARACTERISTICS

UV-C STERILON FLOW 72W luminaires emitting ultraviolet (UV-C) light are one of the most effective devices capable of removing viruses, bacteria, fungi from the surface or destroying the DNA or RNA of any exposed microorganisms. It is available as dual-function products.

APPLICATION

Luminaires are recommended for use in service-providing facilities (hair and beauty salons), health care facilities, hotels, restaurants, public administration, educational and care facilities.

UV-C STERILON FLOW 72W

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

Nominal power [W]	Service life of the UV-C radiation source [h]	Plug type	Cable length [m]	Electrical protection class	Air flow [m3 / h]	Working time counter	Protection against opening	HEPA filter holder	Index
72	9000	UNI-SCHUKO	3	I	160			yes	>> 246456
72	9000	UNI-SCHUKO	3	I	160	yes	yes	yes	>> 240546
72	9000	UNI-SCHUKO	3	I	160	yes		yes	>> 240522
72	9000	UNI-SCHUKO	3	I	160		yes	yes	>> 240416

UV-C STERILON FLOW 72W


GENERAL CARD

ACCESSORIES AVAILABLE

index	Name
WL36500	PL-L UV-C 36W 2G11 OSR fluorescent lamp
240485	Wall bracket STERILON FLOW 72W
243646	Set of guide wheels Sterilon Flow 72W matt white
243677	HEPA H10 filter - set of 5 only for the Flow model
WSAW347	WSAW347 - SterilOn fan dust filter 115x115 PPM 30 1pkg=3pcs
243639	UV-C protective glasses



Set of guide wheels Sterilon Flow 72W matt white (243646)




HEPA H10 filter - set of 5 only for the Flow model (243677)



UV-C protective glasses (243639)

UV-C STERILON FLOW 144W

GENERAL CARD

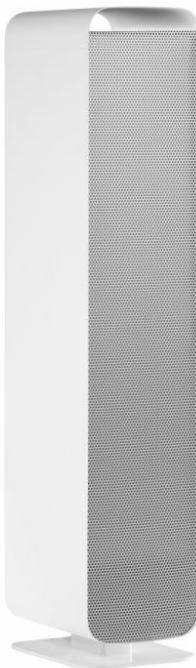

TECHNICAL PARAMETERS

Nominal power [W]:	144.00
Supply voltage [V]:	220 - 240
Electrical protection class:	I
Material of the body:	carbon steel
Colour of the body:	white/silver
Dimensions (H/W/T/S) [mm]:	724/160/220
Ingress protection:	IP20
Mounting version:	detached
Version:	dual-purpose
Max volume of the disinfected room [m3]:	120.00
Warranty [years]:	2

CHARACTERISTICS

UV-C STERILON FLOW 144W luminaires emitting ultraviolet (UV-C) light are one of the most effective devices capable of removing viruses, bacteria, fungi from the surface or destroying the DNA or RNA of any exposed microorganisms. It is available as dual-function products.

APPLICATION

Luminaires are recommended for use in service-providing facilities (hair and beauty salons), health care facilities, hotels, restaurants, public administration, educational and care facilities.

UV-C STERILON FLOW 144W

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

Nominal power [W]	Service life of the UV-C radiation source [h]	Plug type	Cable length [m]	Electrical protection class	Air flow [m3 / h]	Working time counter	Protection against opening	HEPA filter holder	Index
144	9000	UNI-SCHUKO	3	I	200			yes	>> 246463
144	9000	UNI-SCHUKO	3	I	200		yes	yes	>> 240423
144	9000	UNI-SCHUKO	3	I	200	yes	yes	yes	>> 240553
144	9000	UNI-SCHUKO	3	I	200	yes		yes	>> 240539

UV-C STERILON FLOW 144W


GENERAL CARD

ACCESSORIES AVAILABLE

index	Name
WL36500	PL-L UV-C 36W 2G11 OSR fluorescent lamp
240492	Wall bracket STERILON FLOW 144W
243660	Set of guide wheels Sterilon Flow 144W white matt
243677	HEPA H10 filter - set of 5 only for the Flow model
WSAW347	WSAW347 - SterilOn fan dust filter 115x115 PPM 30 1pkg=3pcs
243639	UV-C protective glasses



Set of guide wheels Sterilon Flow 144W white matt (243660)



HEPA H10 filter - set of 5 only for the Flow model (243677)



UV-C protective glasses (243639)

UV-C STERILON FLOW 72W MONO

GENERAL CARD



TECHNICAL PARAMETERS

Nominal power [W]:	72.00
Supply voltage [V]:	220 - 240
Electrical protection class:	I
Material of the body:	carbon steel
Colour of the body:	white
Dimensions (H/W/T/S) [mm]:	724/160/160
Ingress protection:	IP20
Mounting version:	detached
Version:	single-function
Max volume of the disinfected room [m3]:	60.00
Warranty [years]:	2

CHARACTERISTICS

UV-C STERILON FLOW 72W MONO luminaire emitting ultraviolet (UV-C) light is one of the most effective devices capable of removing viruses, bacteria, fungi from the environment or destroying the DNA or RNA of any exposed microorganisms.


APPLICATION

Luminaires are recommended for use in service-providing facilities (hair and beauty salons), health care facilities, hotels, restaurants, public administration, educational and care facilities.

UV-C STERILON FLOW 72W MONO

GENERAL CARD

AVAILABLE VERSIONS

 Click index >>, to see details

Nominal power [W]	Service life of the UV-C radiation source [h]	Version	Plug type	Cable length [m]	Electrical protection class	Supply voltage [V]	Air flow [m3 / h]	Working time counter	HEPA filter holder	Index
72	9000	single-function	UNI-SCHUKO	3	I	220 - 240	110		yes	>> 246449
72	9000	single-function	UNI-SCHUKO	3	I	220 - 240	110	yes	yes	>> 240515

UV-C STERILON FLOW 72W MONO

GENERAL CARD

ACCESSORIES AVAILABLE


index	Name
WL36500	PL-L UV-C 36W 2G11 OSR fluorescent lamp
240478	Wall bracket STERILON FLOW MONO
243653	Set of guide wheels Sterilon Flow 72W gloss white
WSAW347	WSAW347 - SterilOn fan dust filter 115x115 PPM 30 1pkg=3pcs
244339	Set of 5 x Sterilon AIR G1 3x127x135mm pre-filter



Set of guide wheels Sterilon Flow 72W
gloss white (243653)

UV-C STERILON BASIC

GENERAL CARD

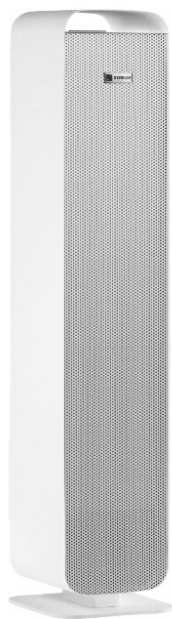

TECHNICAL PARAMETERS

Nominal power [W]:	72.00; 144.00
Supply voltage [V]:	220 - 240
Electrical protection class:	I
Material of the body:	carbon steel
Ingress protection:	IP20
Max volume of the disinfected room [m3]:	75.00; 120.00
Mounting version:	detached
Dimensions (H/W/T/S) [mm]:	724/160/160; 724/160/220

CHARACTERISTICS

UV-C Sterilon Basic luminaires emitting ultraviolet (UV-C) light are one of the most effective devices capable of removing viruses, bacteria, fungi from the surface or destroying the DNA or RNA of any exposed microorganisms. The luminaire is equipped with the ECO mode, which makes it quieter. ON / OFF switch on the power cord. The button on the body is responsible for activating the ECO function.

APPLICATION

Luminaires are recommended for use in service-providing facilities (hair and beauty salons), health care facilities, hotels, restaurants, public administration, educational and care facilities.

UV-C STERILON BASIC

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

Nominal power [W]	Service life of the UV-C radiation source [h]	Plug type	Cable length [m]	Air flow in ECO mode [m3 / h]	Air flow [m3 / h]	ECO mode	Working time counter	HEPA filter holder	Index
144	9000	UNI-SCHUKO	3	80	200	yes	yes	yes	>> 997938
72	9000	UNI-SCHUKO	3	80	160	yes	yes	yes	>> 997921

UV-C STERILON BASIC

GENERAL CARD

ACCESSORIES AVAILABLE


index	Name
WL36500	PL-L UV-C 36W 2G11 OSR fluorescent lamp
240485	Wall bracket STERILON FLOW 72W
240492	Wall bracket STERILON FLOW 144W
243646	Set of guide wheels Sterilon Flow 72W matt white
243660	Set of guide wheels Sterilon Flow 144W white matt
243677	HEPA H10 filter - set of 5 only for the Flow model
WSAW347	WSAW347 - SterilOn fan dust filter 115x115 PPM 30 1pkg=3pcs



Set of guide wheels Sterilon Flow 72W matt white (243646)



Set of guide wheels Sterilon Flow 144W white matt (243660)



HEPA H10 filter - set of 5 only for the Flow model (243677)

По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Россия (495)268-04-70

Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Киргизия (996)312-96-26-47

Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Казахстан (7172)727-132

Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93