

Стандартные рабочие прожекторы

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Россия (495)268-04-70

Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Киргизия (996)312-96-26-47

Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Казахстан (7172)727-132

Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

MAGNUM HOBBY 32W

GENERAL CARD



TECHNICAL PARAMETERS

Ingress protection:	IP44; IP54
Impact resistance:	IK10
Rated power of the luminaire [W]*:	32.00
Colour temperature [K]:	4000
Luminous flux [lm]*:	3600
Supply voltage [V]:	220-240
Electrical protection class:	I; II
Material of the body:	PP
Colour of the body:	green
Diffuser material:	PC
Diffuser type:	frozen
Dimensions (H/W/T/S) [mm]:	300/400/100
Warranty [years]:	2

CHARACTERISTICS

Compact and light LED floodlight for professional use. It provides uniform and stable directional lighting. Luminaire made of impact-resistant polypropylene (PP). Anti-glare diffuser made of polycarbonate (PC) transmits up to 80% of the light emitted by the diodes. It is equipped with a multi-position arm with a tilt lock of the housing, handles for cable winding and an ergonomic carrying handle.

APPLICATION

The luminaire will provide precise illumination of the workplace.

MAGNUM HOBBY 32W

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Plug type	Socket type	Sockets	Wire type	Cable length [m]	Electrical protection class	Ingress protection	Index
32	4000	3600	frozen	DK			H07RN-F 2×1,0mm	3	I	IP44	>> 406430
32	4000	3600	frozen	DK	DK	1	H07RN-F 3×1,5mm	3	I	IP44	>> 406409
32	4000	3600	frozen	UNI-SCHUKO			H07RN-F 2×1,0mm	3	II	IP54	>> 406447
32	4000	3600	frozen	UNI-SCHUKO	PL-FR	1	H07RN-F 3×1,5mm	3	I	IP54	>> 406416
32	4000	3600	frozen	UNI-SCHUKO	SCHUKO	1	H07RN-F 3×1,5mm	3	I	IP54	>> 406423

MAGNUM HOBBY 50W

GENERAL CARD



TECHNICAL PARAMETERS

Ingress protection:	IP44; IP54
Impact resistance:	IK10
Rated power of the luminaire [W]*:	50.00
Colour temperature [K]:	4000
Luminous flux [lm]*:	5500
Supply voltage [V]:	220-240
Electrical protection class:	I; II
Material of the body:	PP
Colour of the body:	green
Diffuser material:	PC
Diffuser type:	frozen
Dimensions (H/W/T/S) [mm]:	300/480/75
Warranty [years]:	2

CHARACTERISTICS

Compact and light LED floodlight for professional use. It provides uniform and stable directional lighting. Luminaire made of impact-resistant polypropylene (PP). Anti-glare diffuser made of polycarbonate (PC) transmits up to 80% of the light emitted by the diodes. It is equipped with a multi-position arm with a tilt lock of the housing, handles for cable winding and an ergonomic carrying handle.

APPLICATION

The family of durable and handy luminaires has been designed to illuminate larger areas.

MAGNUM HOBBY 50W

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Plug type	Socket type	Sockets	Cable length [m]	Electrical protection class	Ingress protection	Index
50	4000	5500	frozen	DK			3	I	IP44	>> 406454
50	4000	5500	frozen	UNI-SCHUKO			3	II	IP54	>> 406492
50	4000	5500	frozen	DK	DK	1	3	I	IP44	>> 406461
50	4000	5500	frozen	UNI-SCHUKO	PL-FR	1	3	I	IP54	>> 406478
50	4000	5500	frozen	UNI-SCHUKO	SCHUKO	1	3	I	IP54	>> 406485

MAGNUM HOBBY 78W

GENERAL CARD



TECHNICAL PARAMETERS

Ingress protection:	IP44; IP54
Impact resistance:	IK10
Rated power of the luminaire [W]*:	78.00
Colour temperature [K]:	4000
Luminous flux [lm]*:	9500
Supply voltage [V]:	220-240
Electrical protection class:	I; II
Material of the body:	PP
Colour of the body:	green
Diffuser material:	PC
Diffuser type:	frozen
Dimensions (H/W/T/S) [mm]:	300/480/75
Warranty [years]:	2

CHARACTERISTICS

Compact and light LED floodlight for professional use. It provides uniform and stable directional lighting. Luminaire made of impact-resistant polypropylene (PP). Anti-glare diffuser made of polycarbonate (PC) transmits up to 80% of the light emitted by the diodes. It is equipped with a multi-position arm with a tilt lock of the housing, handles for cable winding and an ergonomic carrying handle.

APPLICATION

The family of durable and handy luminaires has been designed to illuminate larger areas.

MAGNUM HOBBY 78W

GENERAL CARD

AVAILABLE VERSIONS




Click index >>, to see details

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Plug type	Socket type	Sockets	Cable length [m]	Electrical protection class	Ingress protection	Index
78	4000	9500	frozen	DK			3	I	IP44	>> 406508
78	4000	9500	frozen	DK	DK	1	3	I	IP44	>> 406539
78	4000	9500	frozen	UNI-SCHUKO			3	II	IP54	>> 406515
78	4000	9500	frozen	UNI-SCHUKO	PL-FR	1	3	I	IP54	>> 406546
78	4000	9500	frozen	UNI-SCHUKO	SCHUKO	1	3	I	IP54	>> 406522

MAGNUM FUTURE LED XS BASIC

GENERAL CARD

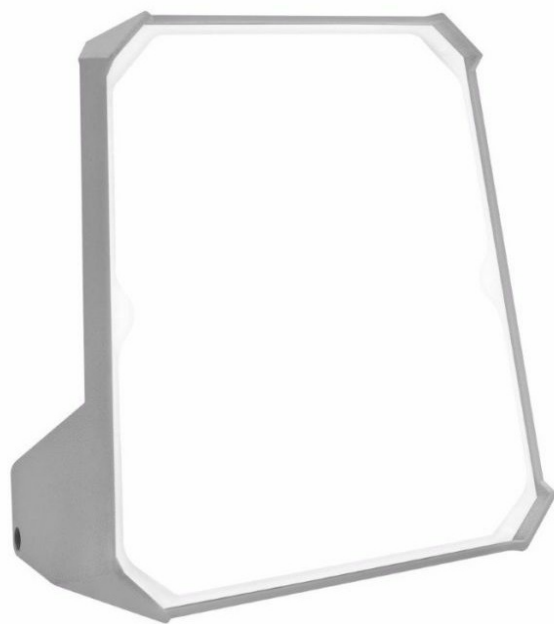

TECHNICAL PARAMETERS

Ingress protection:	IP54
Impact resistance:	IK10
Nominal power [W]:	20.00
Colour temperature [K]:	4000
Luminous flux [lm]*:	1600
Supply voltage [V]:	220-240
Electrical protection class:	II
Material of the body:	PP
Colour of the body:	grey
Diffuser material:	PC
Diffuser type:	frozen
Dimensions (H/W/T/S) [mm]:	192/193/123

CHARACTERISTICS

Compact and light LED floodlight for professional use. It provides uniform and stable directional lighting. Made of impact-resistant polipropylen (PP). Anti-glare diffuser which, despite the matt surface, transmits up to 80% of the light emitted by the diodes. The smaller size and compact design make it convenient to transport. It is equipped with a movable, multi-position arm also acting as a hook. Multi-purpose mounting bracket included. It can be mounted on a Future Stand, significantly increasing the range and comfort of use.

APPLICATION

It can be used as a workplace luminaire to illuminate workplaces and construction sites. The smaller size and compact design make it more convenient to transport. The luminaire is designed for outdoor use, industrial applications or other applications where the lighting standards allow CRI <80.

MAGNUM FUTURE LED XS BASIC

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Cable length [m]	Dimensions (H/W/T/S) [mm]	Index
20	4000	1600	3	192/193/123	>> 256943

MAGNUM FUTURE LITE LED 32W

GENERAL CARD



TECHNICAL PARAMETERS

Ingress protection:	IP44; IP54
Impact resistance:	IK10
Nominal power [W]:	32.00
Colour temperature [K]:	4000
Luminous flux [lm]*:	3600
Supply voltage [V]:	220 - 240; 220-240
Electrical protection class:	I; II
Material of the body:	PP
Colour of the body:	green
Diffuser material:	PC
Diffuser type:	frozen
Dimensions (H/W/T/S) [mm]:	300/400/100

CHARACTERISTICS

Compact and light LED floodlight for professional use. It provides uniform and stable directional lighting. Luminaire made of impact-resistant polypropylene (PP). Anti-glare diffuser made of polycarbonate (PC) transmits up to 80% of the light emitted by the diodes. It is equipped with a multi-position arm with a tilt lock of the housing, handles for cable winding and an ergonomic carrying handle.

APPLICATION

The luminaire will provide precise illumination of the workplace.

MAGNUM FUTURE LITE LED 32W

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Plug type	Socket type	Sockets	Cable length [m]	Electrical protection class	Ingress protection	Index
32	4000	3600	DK			3	I	IP44	>> 406232
32	4000	3600	DK	DK	1	3	I	IP44	>> 406201
32	4000	3600	UNI-SCHUKO			3	II	IP54	>> 406249
32	4000	3600	UNI-SCHUKO	PL-FR	1	3	I	IP54	>> 406218
32	4000	3600	UNI-SCHUKO	SCHUKO	1	3	I	IP54	>> 406225

MAGNUM FUTURE LITE LED 50W

GENERAL CARD



TECHNICAL PARAMETERS

Ingress protection:	IP44; IP54
Impact resistance:	IK10
Nominal power [W]:	50.00
Colour temperature [K]:	4000
Luminous flux [lm]*:	5500
Supply voltage [V]:	220-240
Electrical protection class:	I; II
Material of the body:	PP
Colour of the body:	green
Diffuser material:	PC
Diffuser type:	frozen
Dimensions (H/W/T/S) [mm]:	300/480/75

CHARACTERISTICS

Compact and light LED floodlight for professional use. It provides uniform and stable directional lighting. Luminaire made of impact-resistant polypropylene (PP). Anti-glare diffuser which, despite the matt surface, transmits up to 80% of the light emitted by the diodes. It is equipped with a multi-position arm with a tilt lock of the housing, handles for cable winding and an ergonomic carrying handle.

APPLICATION

The family of durable and handy MAGNUM FUTURE LED XL luminaires has been designed to illuminate larger areas.

MAGNUM FUTURE LITE LED 50W

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Plug type	Socket type	Sockets	Cable length [m]	Electrical protection class	Ingress protection	Index
50	4000	5500	DK			3	I	IP44	>> 406256
50	4000	5500	DK	DK	1	3	I	IP44	>> 406263
50	4000	5500	UNI-SCHUKO			3	II	IP54	>> 406294
50	4000	5500	UNI-SCHUKO	PL-FR	1	3	I	IP54	>> 406270
50	4000	5500	UNI-SCHUKO	SCHUKO	1	3	I	IP54	>> 406287

MAGNUM FUTURE LITE LED 78W

GENERAL CARD



TECHNICAL PARAMETERS

Ingress protection:	IP44; IP54
Impact resistance:	IK10
Nominal power [W]:	78.00
Colour temperature [K]:	4000
Luminous flux [lm]*:	9500
Supply voltage [V]:	220-240
Electrical protection class:	I; II
Material of the body:	PP
Colour of the body:	green
Diffuser material:	PC
Diffuser type:	frozen
Dimensions (H/W/T/S) [mm]:	300/480/75

CHARACTERISTICS

Compact and light LED floodlight for professional use. It provides uniform and stable directional lighting. Luminaire made of impact-resistant polypropylene (PP). Anti-glare diffuser which, despite the matt surface, transmits up to 80% of the light emitted by the diodes. It is equipped with a multi-position arm with a tilt lock of the housing, handles for cable winding and an ergonomic carrying handle.

APPLICATION

The family of durable and handy MAGNUM FUTURE LED XL luminaires has been designed to illuminate larger areas.

MAGNUM FUTURE LITE LED 78W

GENERAL CARD

AVAILABLE VERSIONS




Click index >>, to see details

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Plug type	Socket type	Sockets	Cable length [m]	Electrical protection class	Ingress protection	Index
78	4000	9500	DK			3	I	IP44	>> 406300
78	4000	9500	UNI-SCHUKO	SCHUKO	1	3	I	IP54	>> 406324
78	4000	9500	DK	DK	1	3	I	IP44	>> 406331
78	4000	9500	UNI-SCHUKO	PL-FR	1	3	I	IP54	>> 406348
78	4000	9500	UNI-SCHUKO			3	II	IP54	>> 406317

MAGNUM 72W/108W

NAŚWIETLACZE / FLOODLIGHTS

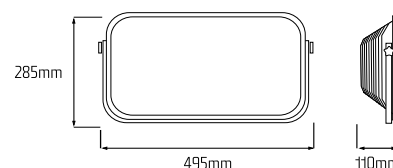

IMPACT RESISTANCE
UDERZENIOODPORNOŚĆ

IP54

SPLASH-PROOF
BRYZGODPORNOŚĆ

108W

= 400W

72W

= 300W



PAGE 54
STRONA 54

ACCESSORIES
AKCESORIA

- Źródło światła: świetlówki TC-L (2x36W lub 3x36W)
- Moc: 72W lub 108W
- Maksymalny strumień świetlny (72W): 2600lm
- Maksymalny strumień świetlny (108W): 3400lm
- Trzonek: 2G11
- Typ balastu: EVG
- Stopień szczelności: IP54
- Klosz pryzmatyczny wykonany z poliwęglanu
- Uderzenioodporna obudowa i wielopozycyjne ramię
- Przewód gumowy H07RN-F 2x1,0 mm² (5m)

Opcjonalnie dostępne:

- Jedno lub dwa gniazda wbudowane w tylnej części oprawy
- Przewód gumowy H07RN-F 3x1,5mm² (5m)
- Uchwyty do nawijania przewodu
- Waga: 3,7 kg - 3,9 kg

- Light source: fluorescent tube TC-L (2x36W or 3x36W)
- Power: 72W or 108W
- Total luminous flux (72W): 2600lm
- Total luminous flux (108W): 3400lm
- Lamp holder: 2G11
- Ballast type: EVG
- Ingress protection class: IP54
- Polycarbonate prismatic diffuser
- Impact resistant casing and multi-positional arm
- Rubber cable H07RN-F 2x1,0mm² (5m)

Optionally available:

- One or two sockets at the back of the fitting
- Rubber cable H07RN-F 3x1,5mm² (5m)
- Cable winding holders
- Weight: 3,7 - 3,9 kg

MAGNUM 72W/108W

NAŚWIETLACZE / FLOODLIGHTS

index	moc power [W]	napięcie zasilające power supply [V]	IP	rodzaj wtyczki plug type	gniazda sockets	kl.ochronności protection class	waga weight [kg]
244919	72	220-240	54	UNI-SCHUKO	-	II	3,7
244926	72	220-240	54	UNI-SCHUKO	2xSCHUKO	I	3,9
244933	72	220-240	54	UNI-SCHUKO	2xPL-FR	I	3,9
244940	72	220-240	44	DK	2xDK	I	3,9
MAGNUM 108W							
246623	108	220-240	54	UNI-SCHUKO	-	II	3,8
246630	108	220-240	54	UNI-SCHUKO	1xSCHUKO	I	3,9
246647	108	220-240	54	UNI-SCHUKO	1xPL-FR	I	3,9
246654	108	220-240	44	DK	1xDK	I	3,9



Magnum z dwoma gniazdami /
Magnum with two sockets




Magnum z jednym gniazdem /
Magnum with one socket



MAGNUM LED 32W/44W

NAŚWIETLACZE / FLOODLIGHTS

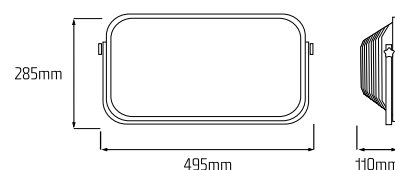

LED IK10 IP54 IP44 220-240V 50-60Hz 24V 42V 110V



IMPACT RESISTANCE
UDERZENIOODPORNOŚĆ

IP54

SPLASH-PROOF
BRYZGODPORNOŚĆ



CZUJNIK RUCHU
MOTION DETECTOR

44W
= 400W

32W
= 300W



PAGE 54
STRONA 54

ACCESSORIES
AKCESORIA

- Źródło światła: wysokowydajne LED GO!
- Moc: 32W lub 44W
- Maksymalny strumień świetlny: 2900lm (32W), 4200lm (44W)
- Stopień szczelności: IP 44/54
- Uderzenioodporna obudowa
- Wielopozycyjne ramię
- Anty-olśnieniowy klosz wykonany z mrożonego poliwęglanu
- Uchwyty do nawijania przewodu oraz rączka
- Przewód gumowy H07RN-F 2x1,0mm² (5m)
- Waga: 3,4 - 3,8 kg

Opcjonalnie dostępne:

- Dwa gniazda wbudowane w tylnej części oprawy
- Przewód gumowy H07RN-F 3x1,5mm² (5m)
- Radiowy czujnik ruchu (RCR)
- Wersja Basic z krótszym przewodem (2m)

- Light source: highly efficient LED GO!
- Power: 32W or 44W
- Total luminous flux: 2900lm (32W), 4200lm (44W)
- Ingress protection class: IP 44/54
- Impact-resistant casing
- Multi-positional arm
- Anti-glare diffuser made of frozen polycarbonate
- Additional cable winding holders and a handle
- Rubber cable H07RN-F 2x1,0mm² (5m)
- Weight: 3,4 kg - 3,8 kg

Optionally available:

- Two sockets at the back side of the fitting
- Rubber cable H07RN-F 3x1,5mm² (5m)
- Radio motion sensor (RCR)
- Basic version with short cable (2m)

MAGNUM LED 32W/44W

NAŚWIETLACZE / FLOODLIGHTS

index	moc power [W]	napięcie zasilające power supply [V]	IP	rodzaj wtyczki plug type	gniazda sockets	kl.ochronności protection class	RCR motion sensor	waga weight [kg]
MAGNUM LED 32W								
245015	32	220-240	54	UNI-SCHUKO	-	II	-	3,4
245039	32	220-240	54	UNI-SCHUKO	2xPL-FR	I	-	3,6
245046	32	220-240	54	UNI-SCHUKO	2xSCHUKO	I	-	3,6
245022	32	220-240	44	DK	2xDK	I	-	3,6
MAGNUM LED 32W RCR								
245077	32	220-240	54	UNI-SCHUKO	2xSCHUKO	I	+	3,8
245060	32	220-240	54	UNI-SCHUKO	2xPL-FR	I	+	3,8
245053	32	220-240	44	DK	2xDK	I	+	3,8
MAGNUM LED 44W								
245343	44	220-240	54	UNI-SCHUKO	-	II	-	3,4
245374	44	220-240	54	UNI-SCHUKO	2xSCHUKO	I	-	3,6
245367	44	220-240	54	UNI-SCHUKO	2xPL-FR	I	-	3,6
245350	44	220-240	44	DK	2xDK	I	-	3,6
245312	44	24	44	CEE	-	III	-	3,5
245336	44	24	44	TRAFO	-	III	-	3,5
245329	44	24	44	CEE	2xCEE (2-PIN)	III	-	3,7
245299	44	42-48	44	CEE	-	III	-	3,5
245305	44	42-48	44	CEE	2xCEE (2-PIN)	III	-	3,7
245282	44	110	44	CEE	-	II	-	3,5
MAGNUM LED 44W RCR								
245268	44	220-240	54	UNI-SCHUKO	2xSCHUKO	I	+	3,8
245251	44	220-240	54	UNI-SCHUKO	2xPL-FR	I	+	3,8
245244	44	220-240	44	DK	2xDK	I	+	3,8
MAGNUM LED BED 44W BASIC								
242496	44	220-240	54	UNI-SCHUKO	-	II	-	2,8



TAURUS LED

GENERAL CARD



TECHNICAL PARAMETERS

Ingress protection:	IP44; IP54
Impact resistance:	IK10
Nominal power [W]:	40.00
Colour temperature [K]:	4000
Supply voltage [V]:	220 - 240; 24; 42
Electrical protection class:	I; II; III
Material of the body:	PP
Colour of the body:	grey
Diffuser material:	PC
Diffuser type:	MAT
Dimensions (H/W/T/S) [mm]:	373/312/125

CHARACTERISTICS

- Light source: highly efficient SMD LED
- Power: 40W
- Ingress protection class: IP54, IP44
- Impact-resistant casing and multi-positional arm
- Anti-glare diffuser made of frozen polycarbonate
- Wide lighting angle (120°)
- Rubber cable H07RN-F 2x1,0mm² (5m)
- Weight: 3,2kg - 3,4kg

Optionally available:

- Two sockets at the backside of the fitting
- Rubber cable H07RN-F 3x1,5mm² (5m)

APPLICATION

TAURUS LED

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

Nominal power [W]	Colour temperature [K]	Ingress protection	Plug type	Socket type	Sockets	Switch	Electrical protection class	Supply voltage [V]	Dimensions (H/W/T/S) [mm]	Index
40	4000	IP44	CEE				III	24	373/312/125	>> 291937
40	4000	IP44	CEE		0	yes	III	24	373/312/125	>> 291951
40	4000	IP44	CEE	CEE (2-PIN)	2		III	24	373/312/125	>> 291944
40	4000	IP44	CEE	CEE (2-PIN)	2	yes	III	24	373/312/125	>> 291968
40	4000	IP44	CEE		0		III	42	373/312/125	>> 291890
40	4000	IP44	CEE		0	yes	III	42	373/312/125	>> 291913
40	4000	IP44	CEE	CEE (2-PIN)	2		III	42	373/312/125	>> 291906
40	4000	IP44	CEE	CEE (2-PIN)	2	yes	III	42	373/312/125	>> 291920
40	4000	IP44	DK		0		I	220 - 240	373/312/125	>> 291807
40	4000	IP44	DK		0	yes	II	220 - 240	373/312/125	>> 291975
40	4000	IP54	UNI-SCHUKO		0		II	220 - 240	373/312/125	>> 291791
40	4000	IP54	UNI-SCHUKO		0	yes	II	220 - 240	373/312/125	>> 291845
40	4000	IP44	DK	DK	2		I	220 - 240	373/312/125	>> 291821
40	4000	IP44	DK	DK	2	yes	I	220 - 240	373/312/125	>> 291876
40	4000	IP54	UNI-SCHUKO	PL-FR	2		I	220 - 240	373/312/125	>> 291814
40	4000	IP54	UNI-SCHUKO	PL-FR	2	yes	I	220 - 240	373/312/125	>> 291869
40	4000	IP54	UNI-SCHUKO	UNI-SCHUKO	2		I	220 - 240	373/312/125	>> 291838
40	4000	IP54	UNI-SCHUKO	UNI-SCHUKO	2	yes	I	220 - 240	373/312/125	>> 291883

MAGNUM 36W

GENERAL CARD



TECHNICAL PARAMETERS

Ingress protection:	IP44; IP54
Impact resistance:	IK10
Nominal power [W]:	36.00
Supply voltage [V]:	220 - 240; 24
Electrical protection class:	I; II; III
Material of the body:	PP
Colour of the body:	black
Diffuser material:	PC
Diffuser type:	transparent
Dimensions (H/W/T/S) [mm]:	340/230/110

CHARACTERISTICS

- Power: 36W
- Light source: TC-L fluorescent tubes (2x18W)
- Lamp-holder: 2G11
- Ballast type: EVG
- Ingress protection class: IP54
- Polycarbonate prismatic diffuser
- Impact-resistant casing and multi-positional arm
- Rubber cable H07RN-F 2x1,0mm² (5m)
- Weight: 2 -2,4 kg

Optionally available:

- One socket at the back side of the fitting
- Rubber cable H07RN-F 3x1,5mm² (5m)
- VVG (KVG) ballast

APPLICATION

MAGNUM 36W

GENERAL CARD

AVAILABLE VERSIONS

 Click index >>, to see details

Nominal power [W]	Ingress protection	Socket type	Sockets	Electrical protection class	Supply voltage [V]	Dimensions (H/W/T/S) [mm]	Index
36	IP54		0	II	220 - 240	340/230/110	>> 242113
36	IP54	UNI-SCHUKO	1	I	220 - 240	340/230/110	>> 242380
36	IP54	PL-FR	1	I	220 - 240	340/230/110	>> 242144
36	IP44		0	III	24	340/230/110	>> 888076
36	IP44		0	III	24	340/230/110	>> 888403

MAGNUM LED 20W BASIC

GENERAL CARD



TECHNICAL PARAMETERS

Nominal power [W]:	20.00
Luminous flux [lm]*:	1800
Supply voltage [V]:	220 - 240
Electrical protection class:	II
Colour temperature [K]:	4000
Light colour:	biały
Colour rendering index:	>80
Diffuser material:	PC
Diffuser type:	MAT
Material of the body:	PP
Colour of the body:	black
Impact resistance:	IK09
Ingress protection:	IP54
Warranty [years]:	2

CHARACTERISTICS

- Light source: highly efficient LED
- Power: 20W
- Total luminous flux: 1800lm
- Ingress protection class: IP54
- Impact-resistant casing
- Multi-positional arm
- Anti-glare diffuser made of frozen polycarbonate
- Rubber cable H07RN-F 2x1,0mm² (5m)
- Weight: 2kg

Optionally available:

- The one socket at the backside of the fitting
- Rubber cable H07RN-F 3x1,5mm² (5m)
- Basic version with short cable (2m)

APPLICATION

MAGNUM LED 20W BASIC

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

Nominal power [W]	Luminous flux [lm]*	Colour temperature [K]	Material of the body	Colour of the body	Impact resistance	Ingress protection	Index
20	1800	4000	PP	black	IK09	IP54	>> 242472

По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231	Казань (843)206-01-48	Новокузнецк (3843)20-46-81	Смоленск (4812)29-41-54
Архангельск (8182)63-90-72	Калининград (4012)72-03-81	Новосибирск (383)227-86-73	Сочи (862)225-72-31
Астрахань (8512)99-46-04	Калуга (4842)92-23-67	Омск (3812)21-46-40	Ставрополь (8652)20-65-13
Барнаул (3852)73-04-60	Кемерово (3842)65-04-62	Орел (4862)44-53-42	Сургут (3462)77-98-35
Белгород (4722)40-23-64	Киров (8332)68-02-04	Оренбург (3532)37-68-04	Тверь (4822)63-31-35
Брянск (4832)59-03-52	Краснодар (861)203-40-90	Пенза (8412)22-31-16	Томск (3822)98-41-53
Владивосток (423)249-28-31	Красноярск (391)204-63-61	Пермь (342)205-81-47	Тула (4872)74-02-29
Волгоград (844)278-03-48	Курск (4712)77-13-04	Ростов-на-Дону (863)308-18-15	Тюмень (3452)66-21-18
Вологда (8172)26-41-59	Липецк (4742)52-20-81	Рязань (4912)46-61-64	Ульяновск (8422)24-23-59
Воронеж (473)204-51-73	Магнитогорск (3519)55-03-13	Самара (846)206-03-16	Уфа (347)229-48-12
Екатеринбург (343)384-55-89	Москва (495)268-04-70	Санкт-Петербург (812)309-46-40	Хабаровск (4212)92-98-04
Иваново (4932)77-34-06	Мурманск (8152)59-64-93	Саратов (845)249-38-78	Челябинск (351)202-03-61
Ижевск (3412)26-03-58	Набережные Челны (8552)20-53-41	Севастополь (8692)22-31-93	Череповец (8202)49-02-64
Иркутск (395)279-98-46	Нижний Новгород (831)429-08-12	Симферополь (3652)67-13-56	Ярославль (4852)69-52-93
Россия (495)268-04-70	Киргизия (996)312-96-26-47	Казахстан (7172)727-132	