

Светильники Expo, Smart, Corona, Astra, Fraga, Tytan, Nectra, Moon, Mirra

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Россия (495)268-04-70

Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Киргизия (996)312-96-26-47

Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Казахстан (7172)727-132

Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

EXPO SYSTEM LED FOR

GENERAL CARD



TECHNICAL PARAMETERS

Ingress protection:	IP20
Nominal power [W]:	18.00 - 28.00
Luminous flux [lm]*:	1100 - 3100
Energy efficiency class:	E; F; G
Material of the body:	aluminium
Diffuser material:	PMMA
Diffuser type:	lens
Mounting version:	track, surface
Dimensions (H/W/T/S) [mm]:	Ø85/255
Version:	art; bakery; fashion; fish and seafood; fresh meat; fruit nad vegetables; meat

CHARACTERISTICS

High quality aluminum projector with LED COB light source. Universal application with track system. Lack of ultraviolet emission or infrared radiation, high color rendering index, high luminous efficacy and durability. Immediate ignition without flicker makes it the best replacement for metal halide or halogen sources projectors.

Available versions dedicated to lighting:

meat, fresh meat, fruits and vegetables, fish and seafood, bread (gold), works of art (art), clothing (fashion).

Accessories:

- base for surface mounting,
- honeycomb that reduces glare.

APPLICATION

Possible use of specialized filters to highlight food stands. As accentuating lighting in commercial buildings, museums, exhibition halls and offices. For connection with track systems in the color of the projector

EXPO SYSTEM LED FOR

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

EXPO SYSTEM LED FOR art

Nominal power [W]	Luminous flux [lm]*	Beam angle [°]	Colour of the body	Energy efficiency class	Index
18	1550	15	white	F	>> 253645
18	1550	15	black	F	>> 253287
18	1550	24	white	F	>> 253706
18	1550	24	black	F	>> 253348
18	1600	36	white	F	>> 253768
18	1600	36	black	F	>> 253409
28	2550	15	white	F	>> 253461
28	2550	15	black	F	>> 253102
28	2550	24	white	F	>> 253522
28	2550	24	black	F	>> 253164
28	2550	36	white	F	>> 253584
28	2550	36	black	F	>> 253225

EXPO SYSTEM LED FOR fresh meat

Nominal power [W]	Luminous flux [lm]*	Beam angle [°]	Colour of the body	Energy efficiency class	Index
18	1100	15	white	G	>> 253614
18	1100	15	black	G	>> 253256
18	1100	24	white	G	>> 253676
18	1100	24	black	G	>> 253317
18	1150	36	white	G	>> 253737
18	1150	36	black	G	>> 253379
28	1900	15	white	G	>> 253430
28	1900	15	black	G	>> 253072
28	1900	24	white	G	>> 253492
28	1900	24	black	G	>> 253133
28	1900	36	white	G	>> 253553
28	1900	36	black	G	>> 253195

EXPO SYSTEM LED FOR fashion

Nominal power [W]	Luminous flux [lm]*	Beam angle [°]	Colour of the body	Energy efficiency class	Index
18	1700	15	white	F	>> 253652
18	1700	15	black	F	>> 253294
18	1700	24	white	F	>> 253713
18	1700	24	black	F	>> 253355
18	1750	36	white	F	>> 253775

EXPO SYSTEM LED FOR

GENERAL CARD

Nominal power [W]	Luminous flux [lm]*	Beam angle [°]	Colour of the body	Energy efficiency class	Index
18	1750	36	black	F	>> 253416
28	2850	15	white	E	>> 253478
28	2850	15	black	E	>> 253119
28	2850	24	white	E	>> 253539
28	2850	24	black	E	>> 253171
28	2850	36	white	E	>> 253591
28	2850	36	black	E	>> 253232

EXPO SYSTEM LED FOR fruit nad vegetables

Nominal power [W]	Luminous flux [lm]*	Beam angle [°]	Colour of the body	Energy efficiency class	Index
18	1600	15	white	F	>> 253621
18	1600	15	black	F	>> 253263
18	1600	24	white	F	>> 253683
18	1600	24	black	F	>> 253324
18	1650	36	white	F	>> 253744
18	1650	36	black	F	>> 253386
28	2650	15	white	F	>> 253447
28	2650	15	black	F	>> 253089
28	2650	24	white	F	>> 253508
28	2650	24	black	F	>> 253140
28	2650	36	white	F	>> 253560
28	2650	36	black	F	>> 253201

EXPO SYSTEM LED FOR bakery

Nominal power [W]	Luminous flux [lm]*	Beam angle [°]	Colour of the body	Energy efficiency class	Index
18	1700	15	white	F	>> 253874
18	1700	15	black	F	>> 253812
18	1700	24	white	F	>> 253881
18	1700	24	black	F	>> 253829
18	1750	36	white	F	>> 253898
18	1750	36	black	F	>> 255137
28	2850	15	white	E	>> 253843
28	2850	15	black	E	>> 253782
28	2850	24	white	E	>> 253850
28	2850	24	black	E	>> 253799
28	2850	36	white	E	>> 253867
28	2850	36	black	E	>> 253805

EXPO SYSTEM LED FOR

GENERAL CARD

EXPO SYSTEM LED FOR fish and seafood

Nominal power [W]	Luminous flux [lm]*	Beam angle [°]	Colour of the body	Energy efficiency class	Index
18	1850	15	white	F	>> 253638
18	1850	15	black	F	>> 253270
18	1850	24	white	F	>> 253690
18	1850	24	black	F	>> 253331
18	1900	36	white	E	>> 253751
18	1900	36	black	E	>> 253393
28	3100	15	white	E	>> 253454
28	3100	15	black	E	>> 253096
28	3100	24	white	E	>> 253515
28	3100	24	black	E	>> 253157
28	3100	36	white	E	>> 253577
28	3100	36	black	E	>> 253218

EXPO SYSTEM LED FOR meat

Nominal power [W]	Luminous flux [lm]*	Beam angle [°]	Colour of the body	Energy efficiency class	Index
18	1100	15	white	G	>> 253607
18	1100	15	black	G	>> 253249
18	1100	24	white	G	>> 253669
18	1100	24	black	G	>> 253300
18	1150	36	white	G	>> 253720
18	1150	36	black	G	>> 253362
28	1900	15	white	G	>> 253423
28	1900	15	black	G	>> 253065
28	1900	24	white	G	>> 253485
28	1900	24	black	G	>> 253126
28	1900	36	white	G	>> 253546
28	1900	36	black	G	>> 253188

EXPO SYSTEM LED FOR

GENERAL CARD

ACCESSORIES AVAILABLE

index	Name
255106	EXPO SYSTEM LED surface mounting base black
255120	EXPO SYSTEM LED honeycomb



EXPO SYSTEM LED surface mounting
base black (255106)



EXPO SYSTEM LED
honeycomb (255120)

EXPO SYSTEM LED

GENERAL CARD



TECHNICAL PARAMETERS

Ingress protection:	IP20
Nominal power [W]:	18.00; 28.00
Luminous flux [lm]*:	1700 - 3100
Colour temperature [K]:	3000; 4000
Electrical protection class:	I
Energy efficiency class:	A+
Material of the body:	aluminium
Colour of the body:	black; white
Diffuser material:	PMMA
Diffuser type:	lens
Beam angle [°]:	15; 24; 36
Mounting version:	track, surface
Warranty [years]:	2

CHARACTERISTICS

High quality aluminum projector with LED COB light source. Universal application with track system. Lack of ultraviolet emission or infrared radiation, high color rendering index, high luminous efficacy and durability. Immediate ignition without flicker makes it the best replacement for metal halide or halogen sources projectors. Optional specialized filters to highlight meat stands, bread or vegetables. Version CRI (Ra) > 90 available on request.

APPLICATION

Possible use of specialized filters to highlight food stands. As accentuating lighting in commercial buildings, museums, exhibition halls and offices. For connection with track systems in the color of the projector

EXPO SYSTEM LED

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

EXPO SYSTEM LED 18W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Beam angle [°]	Colour rendering index	Colour of the body	Energy efficiency class	Index
18	3000	1750	lens	15	>80	black	F	>> 254291
18	3000	1700	lens	24	>80	black	F	>> 254307
18	3000	1750	lens	36	>80	black	F	>> 254314
18	3000	1750	lens	15	>80	white	F	>> 254352
18	3000	1700	lens	24	>80	white	F	>> 254369
18	3000	1750	lens	36	>80	white	F	>> 254376
18	4000	1850	lens	15	>80	black	F	>> 254413
18	4000	1850	lens	24	>80	black	F	>> 254420
18	4000	1900	lens	36	>80	black	E	>> 254437
18	4000	1850	lens	15	>80	white	F	>> 254475
18	4000	1850	lens	24	>80	white	F	>> 254482
18	4000	1900	lens	36	>80	white	E	>> 254499
18	3000	1750	lens	15	>90	black	F	>> 254536
18	3000	1700	lens	24	>90	black	F	>> 254543
18	3000	1750	lens	36	>90	black	F	>> 254550
18	3000	1750	lens	15	>90	white	F	>> 254598
18	3000	1700	lens	24	>90	white	F	>> 254604
18	3000	1750	lens	36	>90	white	F	>> 254611
18	4000	1850	lens	15	>90	black	F	>> 254659
18	4000	1850	lens	24	>90	black	F	>> 254666
18	4000	1900	lens	36	>90	black	E	>> 254673
18	4000	1850	lens	15	>90	white	F	>> 254710
18	4000	1850	lens	24	>90	white	F	>> 254727
18	4000	1900	lens	36	>90	white	E	>> 254734

EXPO SYSTEM LED 28W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Beam angle [°]	Colour rendering index	Colour of the body	Energy efficiency class	Index
28	3000	2850	lens	15	>80	black	E	>> 254260
28	3000	2850	lens	24	>80	black	E	>> 254277
28	3000	2850	lens	36	>80	black	E	>> 254284
28	3000	2850	lens	15	>80	white	E	>> 254321
28	3000	2850	lens	24	>80	white	E	>> 254338
28	3000	2850	lens	36	>80	white	E	>> 254345

EXPO SYSTEM LED


GENERAL CARD

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Beam angle [°]	Colour rendering index	Colour of the body	Energy efficiency class	Index
28	4000	3100	lens	15	>80	black	E	>> 254383
28	4000	3100	lens	24	>80	black	E	>> 254390
28	4000	3100	lens	36	>80	black	E	>> 254406
28	4000	3100	lens	15	>80	white	E	>> 254444
28	4000	3100	lens	24	>80	white	E	>> 254451
28	4000	3100	lens	36	>80	white	E	>> 254468
28	3000	2500	lens	15	>90	black	F	>> 254505
28	3000	2500	lens	24	>90	black	F	>> 254512
28	3000	2500	lens	36	>90	black	F	>> 254529
28	3000	2500	lens	15	>90	white	F	>> 254567
28	3000	2500	lens	24	>90	white	F	>> 254574
28	3000	2500	lens	36	>90	white	F	>> 254581
28	4000	2500	lens	15	>90	black	F	>> 254628
28	4000	2500	lens	24	>90	black	F	>> 254635
28	4000	2500	lens	36	>90	black	F	>> 254642
28	4000	2500	lens	15	>90	white	F	>> 254680
28	4000	2500	lens	24	>90	white	F	>> 254697
28	4000	2500	lens	36	>90	white	F	>> 254703


EXPO SYSTEM LED

GENERAL CARD


LUMINOUS INTENSITY DISTRIB. CURVE



EXPO SYSTEM LED 15 ST



EXPO SYSTEM LED 24 ST



EXPO SYSTEM LED 36 ST

EXPO SYSTEM LED

GENERAL CARD

ACCESSORIES AVAILABLE

index	Name
255106	EXPO SYSTEM LED surface mounting base black
255120	EXPO SYSTEM LED honeycomb




EXPO SYSTEM LED surface mounting
base black (255106)



EXPO SYSTEM LED
honeycomb (255120)

SMART LED EVO

GENERAL CARD

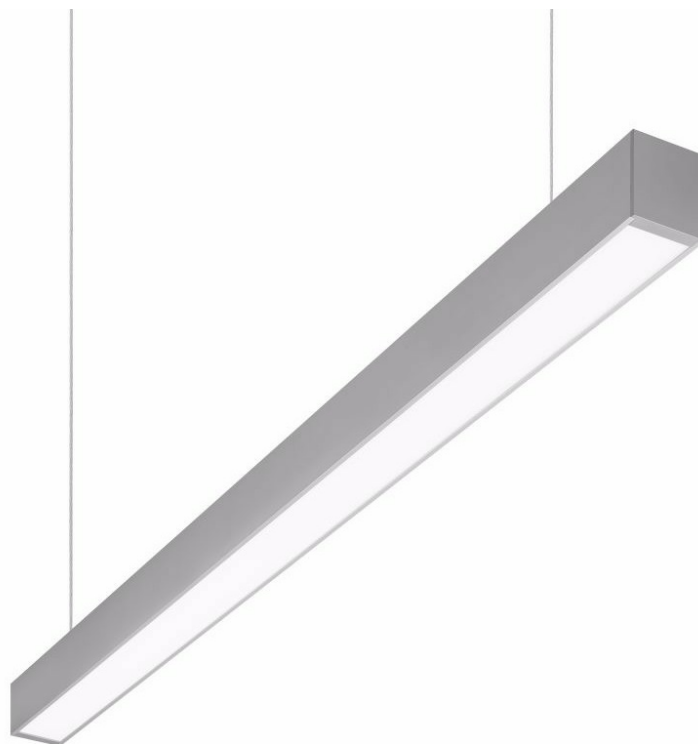

TECHNICAL PARAMETERS

Ingress protection:	IP20
Impact resistance:	IK06
Nominal power [W]:	20.00 - 52.00
Luminous flux [lm]*:	2250 - 6400
Colour temperature [K]:	3000; 4000
Colour rendering index:	>80
SDCM:	≤ 3
Energy efficiency class:	D; E; F
Material of the body:	aluminium; aluminum, steel
Diffuser material:	PMMA
Diffuser type:	OPAL; PRM; PRM MAT
Mounting version:	recessed; surface; suspended
Dimensions (H/W/T/S) [mm]:	55/65/1412; 65/55/1140; 65/55/1420; 72/110/1143; 72/110/1423; 75/55/1140; 75/55/1420

CHARACTERISTICS

Suspended or surface very narrow luminaire including an integrated, energy-saving LED GO! light source. Body made from grey anodized aluminium. The optical system available in two versions: metalized plastic louver or highly uniform opal diffuser. The fitting is equipped with a unique suspension system facilitating installation and adjustment of the slings. Suspensions available as accessories.

Colour temperature 3000K/4000K, CRI ≥ 80.

Available versions:

- DALI
- INDIRECT lighting
- Asymmetric
- with cord and 3P
- with a power cord terminated with a standard earthed plug (3P),
- with a power cable terminated with 5-pole (5P) bone,
- colour: white, black.

APPLICATION

Particularly well suited for indoor use. Suitable as the primary light source dedicated for office work requiring eyesight concentration or work with computers. Luminaire designed to create continuous-row system with option for through-wiring. May also be used in representative rooms. Unique design, energy saving LED GO! light sources and compatibility with external lighting control systems in the DALI standard make this fitting a good solution for use in modern A+ class office buildings.

SMART LED EVO

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

SMART LED EVO surface

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	DIMM DALI	Light distribution type	Wire type	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
30	3000	2950	OPAL	yes			75/55/1140	F	>> 633515
30	3000	2950	OPAL				75/55/1140	F	>> 633034
30	4000	3200	OPAL	yes			75/55/1140	E	>> 633485
30	4000	3200	OPAL				75/55/1140	E	>> 633003
30	3000	3300	PRM	yes			75/55/1140	E	>> 633638
30	3000	3300	PRM				75/55/1140	E	>> 633157
30	4000	3600	PRM	yes			75/55/1140	E	>> 633607
30	4000	3600	PRM				75/55/1140	E	>> 633126
48	3000	4900	OPAL	yes			75/55/1140	E	>> 633577
48	3000	4900	OPAL				75/55/1140	E	>> 633096
48	4000	5350	OPAL	yes			75/55/1140	E	>> 633546
48	4000	5350	OPAL				75/55/1140	E	>> 633065
48	3000	5500	PRM	yes			75/55/1140	E	>> 633690
48	3000	5500	PRM				75/55/1140	E	>> 633218
48	4000	5950	PRM	yes			75/55/1140	D	>> 633669
48	4000	5950	PRM				75/55/1140	D	>> 633188
20	3000	2250	PRM				75/55/1420	E	>> 633393
20	4000	2450	PRM				75/55/1420	D	>> 633362
30	3000	3350	PRM	yes			75/55/1420	E	>> 633751
30	3000	3350	PRM				75/55/1420	E	>> 633270
30	4000	3650	PRM	yes			75/55/1420	D	>> 633720
30	4000	3650	PRM				75/55/1420	D	>> 633249
40	3000	4000	PRM				75/55/1420	F	>> 633331
40	4000	4350	PRM				75/55/1420	E	>> 633300
50	3000	5250	PRM	yes			75/55/1420	E	>> 633935
50	3000	5250	PRM				75/55/1420	E	>> 633454
50	4000	5700	PRM	yes			75/55/1420	E	>> 633904
50	4000	5700	PRM				75/55/1420	E	>> 633423

SMART LED EVO recessed

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	DIMM DALI	Light distribution type	Wire type	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
48	4000	5350	OPAL				72/110/1143	E	>> 378485
40	4000	4350	PRM				72/110/1423	E	>> 378492

SMART LED EVO

GENERAL CARD

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	DIMM DALI	Light distribution type	Wire type	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
50	4000	5700	PRM				72/110/1423	E	>> 378959

SMART LED EVO suspended

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	DIMM DALI	Light distribution type	Wire type	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
52	4000	6400	PRM MAT	yes	DIR/IND	3P + switch	55/65/1412	E	>> 655289
52	3000	5900	PRM MAT		DIR/IND	3P + switch	55/65/1412	E	>> 655609
52	3000	5900	PRM MAT	yes	DIR/IND	5P	55/65/1412	E	>> 655579
52	3000	5900	PRM MAT		DIR/IND	3P	55/65/1412	E	>> 655517
52	3000	5900	PRM MAT	yes	DIR/IND	3P + switch	55/65/1412	E	>> 655487
52	4000	6400	PRM MAT	yes	DIR/IND	5P	55/65/1412	E	>> 655395
52	4000	6400	PRM MAT		DIR/IND	3P	55/65/1412	E	>> 655333
52	4000	6400	PRM MAT		DIR/IND	3P + switch	55/65/1412	E	>> 655425
52	4000	6400	PRM MAT	yes	DIR/IND	3P + switch	55/65/1412	E	>> 655302
30	3000	2950	OPAL	yes			65/55/1140	F	>> 632518
30	3000	2950	OPAL				65/55/1140	F	>> 632037
30	4000	3200	OPAL	yes			65/55/1140	E	>> 632488
30	4000	3200	OPAL				65/55/1140	E	>> 632006
30	3000	3300	PRM	yes			65/55/1140	E	>> 632631
30	3000	3300	PRM				65/55/1140	E	>> 632150
30	4000	3600	PRM	yes			65/55/1140	E	>> 632600
30	4000	3600	PRM				65/55/1140	E	>> 632129
30	3000	2950	OPAL	yes	DIR/IND		65/55/1140	F	>> 634512
30	3000	2950	OPAL		DIR/IND		65/55/1140	F	>> 634031
30	4000	3200	OPAL	yes	DIR/IND		65/55/1140	E	>> 634482
30	4000	3200	OPAL		DIR/IND		65/55/1140	E	>> 634000
30	3000	3300	PRM	yes	DIR/IND		65/55/1140	E	>> 634635
30	3000	3300	PRM		DIR/IND		65/55/1140	E	>> 634154
30	4000	3600	PRM	yes	DIR/IND		65/55/1140	E	>> 634604
30	4000	3600	PRM		DIR/IND		65/55/1140	E	>> 634123
48	3000	4900	OPAL	yes			65/55/1140	E	>> 632570
48	3000	4900	OPAL				65/55/1140	E	>> 632099
48	4000	5350	OPAL	yes			65/55/1140	E	>> 632549
48	4000	5350	OPAL				65/55/1140	E	>> 632068
48	3000	5500	PRM	yes			65/55/1140	E	>> 632693
48	3000	5500	PRM				65/55/1140	E	>> 632211

SMART LED EVO


GENERAL CARD

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	DIMM DALI	Light distribution type	Wire type	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
48	4000	5950	PRM	yes			65/55/1140	D	>> 632662
48	4000	5950	PRM				65/55/1140	D	>> 632181
48	3000	4900	OPAL	yes	DIR/IND		65/55/1140	E	>> 634574
48	3000	4900	OPAL		DIR/IND		65/55/1140	E	>> 634093
48	4000	5350	OPAL	yes	DIR/IND		65/55/1140	E	>> 634543
48	4000	5350	OPAL		DIR/IND		65/55/1140	E	>> 634062
48	3000	5500	PRM	yes	DIR/IND		65/55/1140	E	>> 634697
48	3000	5500	PRM		DIR/IND		65/55/1140	E	>> 634215
48	4000	5950	PRM	yes	DIR/IND		65/55/1140	D	>> 634666
48	4000	5950	PRM		DIR/IND		65/55/1140	D	>> 634185
20	3000	2250	PRM				65/55/1420	E	>> 632396
20	4000	2450	PRM				65/55/1420	D	>> 632365
20	3000	2250	PRM		DIR/IND		65/55/1420	E	>> 634390
20	4000	2450	PRM		DIR/IND		65/55/1420	D	>> 634369
30	3000	3350	PRM	yes			65/55/1420	E	>> 632754
30	3000	3350	PRM				65/55/1420	E	>> 632273
30	4000	3650	PRM	yes			65/55/1420	D	>> 632723
30	4000	3650	PRM				65/55/1420	D	>> 632242
30	3000	3350	PRM	yes	DIR/IND		65/55/1420	E	>> 634758
30	3000	3350	PRM		DIR/IND		65/55/1420	E	>> 634277
30	4000	3650	PRM	yes	DIR/IND		65/55/1420	D	>> 634727
30	4000	3650	PRM		DIR/IND		65/55/1420	D	>> 634246
40	3000	4000	PRM				65/55/1420	F	>> 632334
40	4000	4350	PRM				65/55/1420	E	>> 632303
40	3000	4000	PRM		DIR/IND		65/55/1420	F	>> 634338
40	4000	4350	PRM		DIR/IND		65/55/1420	E	>> 634307
50	3000	5250	PRM	yes			65/55/1420	E	>> 632938
50	3000	5250	PRM				65/55/1420	E	>> 632457
50	4000	5700	PRM	yes			65/55/1420	E	>> 632907
50	4000	5700	PRM				65/55/1420	E	>> 632426
50	3000	5250	PRM	yes	DIR/IND		65/55/1420	E	>> 634932
50	3000	5250	PRM		DIR/IND		65/55/1420	E	>> 634451
50	4000	5700	PRM	yes	DIR/IND		65/55/1420	E	>> 634901
50	4000	5700	PRM		DIR/IND		65/55/1420	E	>> 634420


SMART LED EVO

GENERAL CARD


LUMINOUS INTENSITY DISTRIB. CURVE




SMART LED EVO OPAL



SMART LED EVO OPAL DIR-IND



SMART LED EVO PRM




SMART LED EVO PRM DIR-IND

SMART LED EVO

GENERAL CARD

ACCESSORIES AVAILABLE

index	Name
171512	SINGLE SUSPENDEED CORD
171505	SINGLE ELECTRICAL SUSPENDEED CORD (ROUND BOX)
171635	SINGLE SUSPENDEED CORD (ROUND BOX)
171574	SINGLE ELECTRICAL SUSPENDEED CORD (SQUARE BOX)
171642	SINGLE SUSPENDEED CORD (SQUARE BOX)



SINGLE SUSPENDEED CORD (171512)



SINGLE ELECTRICAL SUSPENDEED CORD (ROUND BOX) (171505)



SINGLE SUSPENDEED CORD (ROUND BOX) (171635)




SINGLE ELECTRICAL SUSPENDEED CORD (SQUARE BOX) (171574)



SINGLE SUSPENDEED CORD (SQUARE BOX) (171642)

SMART LED EVO SYSTEM

GENERAL CARD

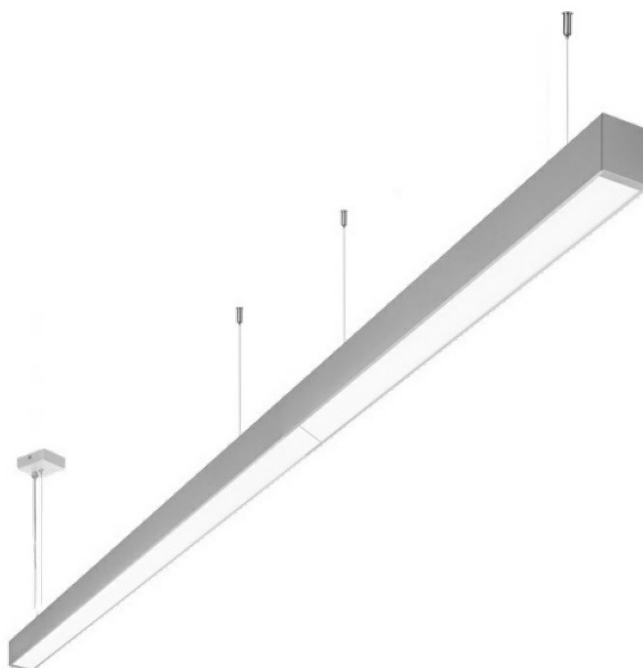

TECHNICAL PARAMETERS

Ingress protection:	IP20
Nominal power [W]:	20.00 - 50.00
Luminous flux [lm]*:	2250 - 5950
Colour temperature [K]:	3000; 4000
Colour rendering index:	>80
SDCM:	≤ 3
Electrical protection class:	I
Energy efficiency class:	A+
Material of the body:	aluminium
Colour of the body:	C0 anode; black; white
Diffuser material:	PMMA
Diffuser type:	OPAL; PRM
Mounting version:	surface; suspended

CHARACTERISTICS

The system of a suspended or surface mounted continuous lighting luminaire with a very narrow cross-section. Its body is made of anodized gray aluminum profile. Optical system designed in two variants: opal or prismatic diffuser. The luminaire is equipped with a unique suspension system that facilitates mounting of the luminaire and adjustment of the suspension length. Characteristics: color temperature 3000K, 4000K; CRI≥80; durability of LED panels 50,000 hours (L70B50) ta = 25°C.

APPLICATION

Suspended modular continuous lighting system luminaire for internal use. It can be used as a primary source of light in offices also when eyesight concentration is required. Unique design, energy-efficient LED panels and the possibility of using DALI systems dedicate the luminaire for use in modern office buildings, with particular emphasis on representative rooms.

SMART LED EVO SYSTEM

GENERAL CARD

AVAILABLE VERSIONS

 Click index >>, to see details

SMART LED EVO SYSTEM surface

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	DIMM DALI	Version	Colour of the body	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
20	3000	2250	PRM		end	C0 anode	65/55/1412	A+	>> 649356
20	4000	2450	PRM		end	C0 anode	65/55/1412	A+	>> 649318
20	3000	2250	PRM		end	white	65/55/1412	A+	>> 649271
20	3000	2250	PRM		end	black	65/55/1412	A+	>> 649196
20	4000	2450	PRM		end	white	65/55/1412	A+	>> 649233
20	4000	2450	PRM		end	black	65/55/1412	A+	>> 649158
20	3000	2250	PRM		middle	C0 anode	75/55/1404	A+	>> 648359
20	4000	2450	PRM		middle	C0 anode	75/55/1404	A+	>> 648311
20	3000	2250	PRM		middle	white	75/55/1404	A+	>> 648274
20	3000	2250	PRM		middle	black	75/55/1404	A+	>> 648199
20	4000	2450	PRM		middle	white	75/55/1404	A+	>> 648236
20	4000	2450	PRM		middle	black	75/55/1404	A+	>> 648151
30	3000	2950	OPAL		end	C0 anode	75/55/1131	A+	>> 649837
30	4000	3200	OPAL		end	C0 anode	75/55/1131	A+	>> 649813
30	3000	3300	PRM		end	C0 anode	75/55/1131	A+	>> 649592
30	4000	3600	PRM		end	C0 anode	75/55/1131	A+	>> 649578
30	3000	3350	PRM		end	C0 anode	65/55/1412	A+	>> 649349
30	4000	3650	PRM		end	C0 anode	65/55/1412	A+	>> 649301
30	3000	2950	OPAL		end	white	75/55/1131	A+	>> 649790
30	3000	2950	OPAL		end	black	75/55/1131	A+	>> 649752
30	4000	3200	OPAL		end	white	75/55/1131	A+	>> 649776
30	4000	3200	OPAL		end	black	75/55/1131	A+	>> 649738
30	3000	3300	PRM		end	white	75/55/1131	A+	>> 649554
30	3000	3300	PRM		end	black	75/55/1131	A+	>> 649516
30	4000	3600	PRM		end	white	75/55/1131	A+	>> 649530
30	3000	3350	PRM		end	white	65/55/1412	A+	>> 649264
30	3000	3350	PRM		end	black	65/55/1412	A+	>> 649189
30	4000	3650	PRM		end	white	65/55/1412	A+	>> 649226
30	4000	3650	PRM		end	black	65/55/1412	A+	>> 649141
30	3000	2950	OPAL		middle	C0 anode	75/55/1123	A+	>> 648830
30	4000	3200	OPAL		middle	C0 anode	75/55/1123	A+	>> 648816
30	3000	3300	PRM		middle	C0 anode	75/55/1123	A+	>> 648595
30	4000	3600	PRM		middle	C0 anode	75/55/1123	A+	>> 648571

SMART LED EVO SYSTEM

GENERAL CARD

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	DIMM DALI	Version	Colour of the body	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
30	3000	3350	PRM		middle	C0 anode	75/55/1404	A+	>> 648342.
30	4000	3650	PRM		middle	C0 anode	75/55/1404	A+	>> 648304.
30	3000	2950	OPAL		middle	white	75/55/1123	A+	>> 648793.
30	3000	2950	OPAL		middle	black	75/55/1123	A+	>> 648755.
30	4000	3200	OPAL		middle	white	75/55/1123	A+	>> 648779.
30	4000	3200	OPAL		middle	black	75/55/1123	A+	>> 648731.
30	3000	3300	PRM		middle	white	75/55/1123	A+	>> 648557.
30	3000	3300	PRM		middle	black	75/55/1123	A+	>> 648519.
30	4000	3600	PRM		middle	white	75/55/1123	A+	>> 648533.
30	4000	3600	PRM		middle	black	75/55/1123	A+	>> 648496.
30	3000	3350	PRM		middle	white	75/55/1404	A+	>> 648267.
30	3000	3350	PRM		middle	black	75/55/1404	A+	>> 648182.
30	4000	3650	PRM		middle	white	75/55/1404	A+	>> 648229.
30	4000	3650	PRM		middle	black	75/55/1404	A+	>> 648144.
30	4000	3600	PRM		end	black	75/55/1131	A+	>> 649493.
30	3000	2950	OPAL	yes	end	C0 anode	75/55/1131	A+	>> 649714.
30	4000	3200	OPAL	yes	end	C0 anode	75/55/1131	A+	>> 649691.
30	3000	3300	PRM	yes	end	C0 anode	75/55/1131	A+	>> 649479.
30	4000	3600	PRM	yes	end	C0 anode	75/55/1131	A+	>> 649455.
30	3000	3350	PRM	yes	end	C0 anode	65/55/1412	A+	>> 649110.
30	4000	3650	PRM	yes	end	C0 anode	65/55/1412	A+	>> 649097.
30	3000	2950	OPAL	yes	end	white	75/55/1131	A+	>> 649677.
30	3000	2950	OPAL	yes	end	black	75/55/1131	A+	>> 649639.
30	4000	3200	OPAL	yes	end	white	75/55/1131	A+	>> 649653.
30	4000	3200	OPAL	yes	end	black	75/55/1131	A+	>> 649615.
30	3000	3300	PRM	yes	end	white	75/55/1131	A+	>> 649431.
30	3000	3300	PRM	yes	end	black	75/55/1131	A+	>> 649394.
30	4000	3600	PRM	yes	end	white	75/55/1131	A+	>> 649417.
30	4000	3600	PRM	yes	end	black	75/55/1131	A+	>> 649370.
30	3000	3350	PRM	yes	end	white	65/55/1412	A+	>> 649073.
30	3000	3350	PRM	yes	end	black	65/55/1412	A+	>> 649035.
30	4000	3650	PRM	yes	end	white	65/55/1412	A+	>> 649059.
30	4000	3650	PRM	yes	end	black	65/55/1412	A+	>> 649011.
30	3000	2950	OPAL	yes	middle	C0 anode	75/55/1123	A+	>> 648717.
30	4000	3200	OPAL	yes	middle	C0 anode	75/55/1123	A+	>> 648694.
30	3000	3300	PRM	yes	middle	C0 anode	75/55/1123	A+	>> 648472.
30	4000	3600	PRM	yes	middle	C0 anode	75/55/1123	A+	>> 648458.
30	3000	3350	PRM	yes	middle	C0 anode	75/55/1404	A+	>> 648113.

SMART LED EVO SYSTEM

GENERAL CARD

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	DIMM DALI	Version	Colour of the body	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
30	4000	3650	PRM	yes	middle	C0 anode	75/55/1404	A+	>> 648090.
30	3000	2950	OPAL	yes	middle	white	75/55/1123	A+	>> 648670.
30	3000	2950	OPAL	yes	middle	black	75/55/1123	A+	>> 648632.
30	4000	3200	OPAL	yes	middle	white	75/55/1123	A+	>> 648656.
30	4000	3200	OPAL	yes	middle	black	75/55/1123	A+	>> 648618.
30	3000	3300	PRM	yes	middle	white	75/55/1123	A+	>> 648434.
30	3000	3300	PRM	yes	middle	black	75/55/1123	A+	>> 648397.
30	4000	3600	PRM	yes	middle	white	75/55/1123	A+	>> 648410.
30	4000	3600	PRM	yes	middle	black	75/55/1123	A+	>> 648373.
30	3000	3350	PRM	yes	middle	white	75/55/1404	A+	>> 648076.
30	3000	3350	PRM	yes	middle	black	75/55/1404	A+	>> 648038.
30	4000	3650	PRM	yes	middle	white	75/55/1404	A+	>> 648052.
30	4000	3650	PRM	yes	middle	black	75/55/1404	A+	>> 648014.
40	3000	4300	PRM		end	C0 anode	65/55/1412	A+	>> 649332.
40	4000	4700	PRM		end	C0 anode	65/55/1412	A+	>> 649295.
40	3000	4300	PRM		end	white	65/55/1412	A+	>> 649257.
40	3000	4300	PRM		end	black	65/55/1412	A+	>> 649172.
40	4000	4700	PRM		end	white	65/55/1412	A+	>> 649219.
40	4000	4700	PRM		end	black	65/55/1412	A+	>> 649134.
40	3000	4300	PRM		middle	C0 anode	75/55/1404	A+	>> 648335.
40	4000	4700	PRM		middle	C0 anode	75/55/1404	A+	>> 648298.
40	3000	4300	PRM		middle	white	75/55/1404	A+	>> 648250.
40	3000	4300	PRM		middle	black	75/55/1404	A+	>> 648175.
40	4000	4700	PRM		middle	white	75/55/1404	A+	>> 648212.
40	4000	4700	PRM		middle	black	75/55/1404	A+	>> 648137.
48	3000	4900	OPAL		end	C0 anode	75/55/1131	A+	>> 649820.
48	4000	5350	OPAL		end	C0 anode	75/55/1131	A+	>> 649806.
48	3000	5500	PRM		end	C0 anode	75/55/1131	A+	>> 649585.
48	4000	5950	PRM		end	C0 anode	75/55/1131	A+	>> 649561.
48	3000	4900	OPAL		end	white	75/55/1131	A+	>> 649783.
48	3000	4900	OPAL		end	black	75/55/1131	A+	>> 649745.
48	4000	5350	OPAL		end	white	75/55/1131	A+	>> 649769.
48	4000	5350	OPAL		end	black	75/55/1131	A+	>> 649721.
48	3000	5500	PRM		end	white	75/55/1131	A+	>> 649547.
48	3000	5500	PRM		end	black	75/55/1131	A+	>> 649509.
48	4000	5950	PRM		end	white	75/55/1131	A+	>> 649523.
48	4000	5950	PRM		end	black	75/55/1131	A+	>> 649486.
48	3000	4900	OPAL		middle	C0 anode	75/55/1123	A+	>> 648823.

SMART LED EVO SYSTEM

GENERAL CARD

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	DIMM DALI	Version	Colour of the body	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
48	4000	5350	OPAL		middle	C0 anode	75/55/1123	A+	>> 648809.
48	3000	5500	PRM		middle	C0 anode	75/55/1123	A+	>> 648588.
48	4000	5950	PRM		middle	C0 anode	75/55/1123	A+	>> 648564.
48	3000	4900	OPAL		middle	white	75/55/1123	A+	>> 648786.
48	3000	4900	OPAL		middle	black	75/55/1123	A+	>> 648748.
48	4000	5350	OPAL		middle	white	75/55/1123	A+	>> 648762.
48	4000	5350	OPAL		middle	black	75/55/1123	A+	>> 648724.
48	3000	5500	PRM		middle	white	75/55/1123	A+	>> 648540.
48	3000	5500	PRM		middle	black	75/55/1123	A+	>> 648502.
48	4000	5950	PRM		middle	white	75/55/1123	A+	>> 648526.
48	4000	5950	PRM		middle	black	75/55/1123	A+	>> 648489.
48	3000	4900	OPAL	yes	end	C0 anode	75/55/1131	A+	>> 649707.
48	4000	5350	OPAL	yes	end	C0 anode	75/55/1131	A+	>> 649684.
48	3000	5500	PRM	yes	end	C0 anode	75/55/1131	A+	>> 649462.
48	4000	5950	PRM	yes	end	C0 anode	75/55/1131	A+	>> 649448.
48	3000	4900	OPAL	yes	end	white	75/55/1131	A+	>> 649660.
48	3000	4900	OPAL	yes	end	black	75/55/1131	A+	>> 649622.
48	4000	5350	OPAL	yes	end	white	75/55/1131	A+	>> 649646.
48	4000	5350	OPAL	yes	end	black	75/55/1131	A+	>> 649608.
48	3000	5500	PRM	yes	end	white	75/55/1131	A+	>> 649424.
48	3000	5500	PRM	yes	end	black	75/55/1131	A+	>> 649387.
48	4000	5950	PRM	yes	end	white	75/55/1131	A+	>> 649400.
48	4000	5950	PRM	yes	end	black	75/55/1131	A+	>> 649363.
48	3000	4900	OPAL	yes	middle	C0 anode	75/55/1123	A+	>> 648700.
48	4000	5350	OPAL	yes	middle	C0 anode	75/55/1123	A+	>> 648687.
48	3000	5500	PRM	yes	middle	C0 anode	75/55/1123	A+	>> 648465.
48	4000	5950	PRM	yes	middle	C0 anode	75/55/1123	A+	>> 648441.
48	3000	4900	OPAL	yes	middle	white	75/55/1123	A+	>> 648663.
48	3000	4900	OPAL	yes	middle	black	75/55/1123	A+	>> 648625.
48	4000	5350	OPAL	yes	middle	white	75/55/1123	A+	>> 648649.
48	4000	5350	OPAL	yes	middle	black	75/55/1123	A+	>> 648601.
48	3000	5500	PRM	yes	middle	white	75/55/1123	A+	>> 648427.
48	3000	5500	PRM	yes	middle	black	75/55/1123	A+	>> 648380.
48	4000	5950	PRM	yes	middle	white	75/55/1123	A+	>> 648403.
48	4000	5950	PRM	yes	middle	black	75/55/1123	A+	>> 648366.
50	3000	5250	PRM		end	C0 anode	65/55/1412	A+	>> 649325.
50	4000	5700	PRM		end	C0 anode	65/55/1412	A+	>> 649288.
50	3000	5250	PRM		end	white	65/55/1412	A+	>> 649240.

SMART LED EVO SYSTEM

GENERAL CARD

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	DIMM DALI	Version	Colour of the body	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
50	3000	5250	PRM		end	black	65/55/1412	A+	>> 649165.
50	4000	5700	PRM		end	white	65/55/1412	A+	>> 649202.
50	4000	5700	PRM		end	black	65/55/1412	A+	>> 649127.
50	3000	5250	PRM		middle	C0 anode	75/55/1404	A+	>> 648328.
50	4000	5700	PRM		middle	C0 anode	75/55/1404	A+	>> 648281.
50	3000	5250	PRM		middle	white	75/55/1404	A+	>> 648243.
50	3000	5250	PRM		middle	black	75/55/1404	A+	>> 648168.
50	4000	5700	PRM		middle	white	75/55/1404	A+	>> 648205.
50	4000	5700	PRM		middle	black	75/55/1404	A+	>> 648120.
50	3000	5250	PRM	yes	end	C0 anode	65/55/1412	A+	>> 649103.
50	4000	5700	PRM	yes	end	C0 anode	65/55/1412	A+	>> 649080.
50	3000	5250	PRM	yes	end	white	65/55/1412	A+	>> 649066.
50	3000	5250	PRM	yes	end	black	65/55/1412	A+	>> 649028.
50	4000	5700	PRM	yes	end	white	65/55/1412	A+	>> 649042.
50	4000	5700	PRM	yes	end	black	65/55/1412	A+	>> 649004.
50	3000	5250	PRM	yes	middle	C0 anode	75/55/1404	A+	>> 648106.
50	4000	5700	PRM	yes	middle	C0 anode	75/55/1404	A+	>> 648083.
50	3000	5250	PRM	yes	middle	white	75/55/1404	A+	>> 648069.
50	3000	5250	PRM	yes	middle	black	75/55/1404	A+	>> 648021.
50	4000	5700	PRM	yes	middle	white	75/55/1404	A+	>> 648045.
50	4000	5700	PRM	yes	middle	black	75/55/1404	A+	>> 648007.

SMART LED EVO SYSTEM suspended

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	DIMM DALI	Version	Colour of the body	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
20	3000	2250	PRM		end	C0 anode	65/55/1412	A+	>> 651557.
20	4000	2450	PRM		end	C0 anode	65/55/1412	A+	>> 651519.
20	3000	2250	PRM		end	white	65/55/1412	A+	>> 651472.
20	3000	2250	PRM		end	black	65/55/1412	A+	>> 651397.
20	4000	2450	PRM		end	white	65/55/1412	A+	>> 651434.
20	4000	2450	PRM		end	black	65/55/1412	A+	>> 651359.
20	3000	2250	PRM		middle	C0 anode	65/55/1404	A+	>> 650550.
20	4000	2450	PRM		middle	C0 anode	65/55/1404	A+	>> 650512.
20	3000	2250	PRM		middle	white	65/55/1404	A+	>> 650475.
20	3000	2250	PRM		middle	black	65/55/1404	A+	>> 650390.
20	4000	2450	PRM		middle	white	65/55/1404	A+	>> 650437.
20	4000	2450	PRM		middle	black	65/55/1404	A+	>> 650352.
30	3000	2950	OPAL		end	C0 anode	65/55/1131	A+	>> 653032.
30	4000	3200	OPAL		end	C0 anode	65/55/1131	A+	>> 653018.

SMART LED EVO SYSTEM

GENERAL CARD

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	DIMM DALI	Version	Colour of the body	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
30	3000	3300	PRM		end	C0 anode	65/55/1131	A+	>> 652790.
30	4000	3600	PRM		end	C0 anode	65/55/1131	A+	>> 652776.
30	3000	3350	PRM		end	C0 anode	65/55/1412	A+	>> 651540.
30	4000	3650	PRM		end	C0 anode	65/55/1412	A+	>> 651502.
30	3000	2950	OPAL		end	white	65/55/1131	A+	>> 652998.
30	3000	2950	OPAL		end	black	65/55/1131	A+	>> 652950.
30	4000	3200	OPAL		end	black	65/55/1131	A+	>> 652936.
30	3000	3300	PRM		end	white	65/55/1131	A+	>> 652752.
30	3000	3300	PRM		end	black	65/55/1131	A+	>> 652714.
30	4000	3600	PRM		end	white	65/55/1131	A+	>> 652738.
30	3000	3350	PRM		end	white	65/55/1412	A+	>> 651465.
30	3000	3350	PRM		end	black	65/55/1412	A+	>> 651380.
30	4000	3650	PRM		end	white	65/55/1412	A+	>> 651427.
30	4000	3650	PRM		end	black	65/55/1412	A+	>> 651342.
30	3000	2950	OPAL		middle	C0 anode	65/55/1123	A+	>> 652516.
30	4000	3200	OPAL		middle	C0 anode	65/55/1123	A+	>> 652493.
30	3000	3300	PRM		middle	C0 anode	65/55/1123	A+	>> 652271.
30	4000	3600	PRM		middle	C0 anode	65/55/1123	A+	>> 652257.
30	3000	3350	PRM		middle	C0 anode	65/55/1404	A+	>> 650543.
30	4000	3650	PRM		middle	C0 anode	65/55/1404	A+	>> 650505.
30	3000	2950	OPAL		middle	white	65/55/1123	A+	>> 652479.
30	3000	2950	OPAL		middle	black	65/55/1123	A+	>> 652431.
30	4000	3200	OPAL		middle	white	65/55/1123	A+	>> 652455.
30	4000	3200	OPAL		middle	black	65/55/1123	A+	>> 652417.
30	3000	3300	PRM		middle	white	65/55/1123	A+	>> 652233.
30	3000	3300	PRM		middle	black	65/55/1123	A+	>> 652196.
30	4000	3600	PRM		middle	white	65/55/1123	A+	>> 652219.
30	4000	3600	PRM		middle	black	65/55/1123	A+	>> 652172.
30	3000	3350	PRM		middle	white	65/55/1404	A+	>> 650468.
30	3000	3350	PRM		middle	black	65/55/1404	A+	>> 650383.
30	4000	3650	PRM		middle	white	65/55/1404	A+	>> 650420.
30	4000	3650	PRM		middle	black	65/55/1404	A+	>> 650345.
30	4000	3200	OPAL		end	white	65/55/1131	A+	>> 652974.
30	4000	3600	PRM		end	black	65/55/1131	A+	>> 652691.
30	3000	2950	OPAL	yes	end	C0 anode	65/55/1131	A+	>> 652912.
30	4000	3200	OPAL	yes	end	C0 anode	65/55/1131	A+	>> 652899.
30	3000	3300	PRM	yes	end	C0 anode	65/55/1131	A+	>> 652677.
30	4000	3600	PRM	yes	end	C0 anode	65/55/1131	A+	>> 652653.

SMART LED EVO SYSTEM

GENERAL CARD

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	DIMM DALI	Version	Colour of the body	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
30	3000	3350	PRM	yes	end	C0 anode	65/55/1412	A+	>> 651311.
30	4000	3650	PRM	yes	end	C0 anode	65/55/1412	A+	>> 651298.
30	3000	2950	OPAL	yes	end	white	65/55/1131	A+	>> 652875.
30	3000	2950	OPAL	yes	end	black	65/55/1131	A+	>> 652837.
30	4000	3200	OPAL	yes	end	white	65/55/1131	A+	>> 652851.
30	4000	3200	OPAL	yes	end	black	65/55/1131	A+	>> 652813.
30	3000	3300	PRM	yes	end	white	65/55/1131	A+	>> 652639.
30	3000	3300	PRM	yes	end	black	65/55/1131	A+	>> 652592.
30	4000	3600	PRM	yes	end	white	65/55/1131	A+	>> 652615.
30	4000	3600	PRM	yes	end	black	65/55/1131	A+	>> 652578.
30	3000	3350	PRM	yes	end	white	65/55/1412	A+	>> 651274.
30	3000	3350	PRM	yes	end	black	65/55/1412	A+	>> 651236.
30	4000	3650	PRM	yes	end	white	65/55/1412	A+	>> 651250.
30	4000	3650	PRM	yes	end	black	65/55/1412	A+	>> 651212.
30	3000	2950	OPAL	yes	middle	C0 anode	65/55/1123	A+	>> 652394.
30	4000	3200	OPAL	yes	middle	C0 anode	65/55/1123	A+	>> 652370.
30	3000	3300	PRM	yes	middle	C0 anode	65/55/1123	A+	>> 652158.
30	4000	3600	PRM	yes	middle	C0 anode	65/55/1123	A+	>> 652134.
30	3000	3350	PRM	yes	middle	C0 anode	65/55/1404	A+	>> 650314.
30	4000	3650	PRM	yes	middle	C0 anode	65/55/1404	A+	>> 650291.
30	3000	2950	OPAL	yes	middle	white	65/55/1123	A+	>> 652356.
30	3000	2950	OPAL	yes	middle	black	65/55/1123	A+	>> 652318.
30	4000	3200	OPAL	yes	middle	white	65/55/1123	A+	>> 652332.
30	4000	3200	OPAL	yes	middle	black	65/55/1123	A+	>> 652295.
30	3000	3300	PRM	yes	middle	white	65/55/1123	A+	>> 652110.
30	3000	3300	PRM	yes	middle	black	65/55/1123	A+	>> 652073.
30	4000	3600	PRM	yes	middle	white	65/55/1123	A+	>> 652097.
30	4000	3600	PRM	yes	middle	black	65/55/1123	A+	>> 652059.
30	3000	3350	PRM	yes	middle	white	65/55/1404	A+	>> 650277.
30	3000	3350	PRM	yes	middle	black	65/55/1404	A+	>> 650239.
30	4000	3650	PRM	yes	middle	white	65/55/1404	A+	>> 650253.
30	4000	3650	PRM	yes	middle	black	65/55/1404	A+	>> 650215.
40	3000	4300	PRM		end	C0 anode	65/55/1412	A+	>> 651533.
40	4000	4700	PRM		end	C0 anode	65/55/1412	A+	>> 651496.
40	3000	4300	PRM		end	white	65/55/1412	A+	>> 651458.
40	3000	4300	PRM		end	black	65/55/1412	A+	>> 651373.
40	4000	4700	PRM		end	white	65/55/1412	A+	>> 651410.
40	4000	4700	PRM		end	black	65/55/1412	A+	>> 651335.

SMART LED EVO SYSTEM

GENERAL CARD

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	DIMM DALI	Version	Colour of the body	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
40	3000	4300	PRM		middle	C0 anode	65/55/1404	A+	>> 650536.
40	4000	4700	PRM		middle	C0 anode	65/55/1404	A+	>> 650499.
40	3000	4300	PRM		middle	white	65/55/1404	A+	>> 650451.
40	3000	4300	PRM		middle	black	65/55/1404	A+	>> 650376.
40	4000	4700	PRM		middle	white	65/55/1404	A+	>> 650413.
40	4000	4700	PRM		middle	black	65/55/1404	A+	>> 650338.
48	3000	4900	OPAL		end	C0 anode	65/55/1131	A+	>> 653025.
48	4000	5350	OPAL		end	C0 anode	65/55/1131	A+	>> 653001.
48	3000	5500	PRM		end	C0 anode	65/55/1131	A+	>> 652783.
48	4000	5950	PRM		end	C0 anode	65/55/1131	A+	>> 652769.
48	3000	4900	OPAL		end	white	65/55/1131	A+	>> 652981.
48	3000	4900	OPAL		end	black	65/55/1131	A+	>> 652943.
48	4000	5350	OPAL		end	white	65/55/1131	A+	>> 652967.
48	4000	5350	OPAL		end	black	65/55/1131	A+	>> 652929.
48	3000	5500	PRM		end	white	65/55/1131	A+	>> 652745.
48	3000	5500	PRM		end	black	65/55/1131	A+	>> 652707.
48	4000	5950	PRM		end	white	65/55/1131	A+	>> 652721.
48	4000	5950	PRM		end	black	65/55/1131	A+	>> 652684.
48	3000	4900	OPAL		middle	C0 anode	65/55/1123	A+	>> 652509.
48	4000	5350	OPAL		middle	C0 anode	65/55/1123	A+	>> 652486.
48	3000	5500	PRM		middle	C0 anode	65/55/1123	A+	>> 652264.
48	4000	5950	PRM		middle	C0 anode	65/55/1123	A+	>> 652240.
48	3000	4900	OPAL		middle	white	65/55/1123	A+	>> 652462.
48	3000	4900	OPAL		middle	black	65/55/1123	A+	>> 652424.
48	4000	5350	OPAL		middle	white	65/55/1123	A+	>> 652448.
48	4000	5350	OPAL		middle	black	65/55/1123	A+	>> 652400.
48	3000	5500	PRM		middle	white	65/55/1123	A+	>> 652226.
48	3000	5500	PRM		middle	black	65/55/1123	A+	>> 652189.
48	4000	5950	PRM		middle	white	65/55/1123	A+	>> 652202.
48	4000	5950	PRM		middle	black	65/55/1123	A+	>> 652165.
48	3000	4900	OPAL	yes	end	C0 anode	65/55/1131	A+	>> 652905.
48	4000	5350	OPAL	yes	end	C0 anode	65/55/1131	A+	>> 652882.
48	3000	5500	PRM	yes	end	C0 anode	65/55/1131	A+	>> 652660.
48	4000	5950	PRM	yes	end	C0 anode	65/55/1131	A+	>> 652646.
48	3000	4900	OPAL	yes	end	white	65/55/1131	A+	>> 652868.
48	3000	4900	OPAL	yes	end	black	65/55/1131	A+	>> 652820.
48	4000	5350	OPAL	yes	end	white	65/55/1131	A+	>> 652844.
48	4000	5350	OPAL	yes	end	black	65/55/1131	A+	>> 652806.


SMART LED EVO SYSTEM

GENERAL CARD

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	DIMM DALI	Version	Colour of the body	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
48	3000	5500	PRM	yes	end	white	65/55/1131	A+	>> 652622.
48	3000	5500	PRM	yes	end	black	65/55/1131	A+	>> 652585.
48	4000	5950	PRM	yes	end	white	65/55/1131	A+	>> 652608.
48	4000	5950	PRM	yes	end	black	65/55/1131	A+	>> 652561.
48	3000	4900	OPAL	yes	middle	C0 anode	65/55/1123	A+	>> 652387.
48	4000	5350	OPAL	yes	middle	C0 anode	65/55/1123	A+	>> 652363.
48	3000	5500	PRM	yes	middle	C0 anode	65/55/1123	A+	>> 652141.
48	4000	5950	PRM	yes	middle	C0 anode	65/55/1123	A+	>> 652127.
48	3000	4900	OPAL	yes	middle	white	65/55/1123	A+	>> 652349.
48	3000	4900	OPAL	yes	middle	black	65/55/1123	A+	>> 652301.
48	4000	5350	OPAL	yes	middle	white	65/55/1123	A+	>> 652325.
48	4000	5350	OPAL	yes	middle	black	65/55/1123	A+	>> 652288.
48	3000	5500	PRM	yes	middle	white	65/55/1123	A+	>> 652103.
48	3000	5500	PRM	yes	middle	black	65/55/1123	A+	>> 652066.
48	4000	5950	PRM	yes	middle	white	65/55/1123	A+	>> 652080.
48	4000	5950	PRM	yes	middle	black	65/55/1123	A+	>> 652042.
50	3000	5250	PRM		end	C0 anode	65/55/1412	A+	>> 651526.
50	3000	5250	PRM		end	white	65/55/1412	A+	>> 651441.
50	3000	5250	PRM		end	black	65/55/1412	A+	>> 651366.
50	4000	5700	PRM		end	white	65/55/1412	A+	>> 651403.
50	4000	5700	PRM		end	black	65/55/1412	A+	>> 651328.
50	3000	5250	PRM		middle	C0 anode	65/55/1404	A+	>> 650529.
50	3000	5250	PRM		middle	white	65/55/1404	A+	>> 650444.
50	3000	5250	PRM		middle	black	65/55/1404	A+	>> 650369.
50	4000	5700	PRM		middle	white	65/55/1404	A+	>> 650406.
50	4000	5700	PRM		middle	black	65/55/1404	A+	>> 650321.
50	3000	5250	PRM	yes	end	C0 anode	65/55/1412	A+	>> 651304.
50	4000	5700	PRM	yes	end	C0 anode	65/55/1412	A+	>> 651281.
50	3000	5250	PRM	yes	end	white	65/55/1412	A+	>> 651267.
50	3000	5250	PRM	yes	end	black	65/55/1412	A+	>> 651229.
50	4000	5700	PRM	yes	end	white	65/55/1412	A+	>> 651243.
50	4000	5700	PRM	yes	end	black	65/55/1412	A+	>> 651205.
50	3000	5250	PRM	yes	middle	C0 anode	65/55/1404	A+	>> 650307.
50	4000	5700	PRM	yes	middle	C0 anode	65/55/1404	A+	>> 650284.
50	3000	5250	PRM	yes	middle	white	65/55/1404	A+	>> 650260.
50	3000	5250	PRM	yes	middle	black	65/55/1404	A+	>> 650222.
50	4000	5700	PRM	yes	middle	white	65/55/1404	A+	>> 650246.
50	4000	5700	PRM	yes	middle	black	65/55/1404	A+	>> 650208.

SMART LED EVO BRACKET

GENERAL CARD

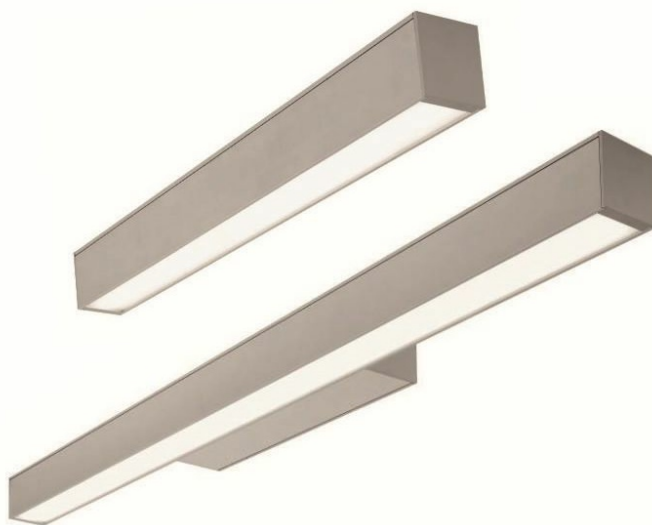

TECHNICAL PARAMETERS

Light source:	LED module
Ingress protection:	IP20
Nominal power [W]:	8.00; 17.00; 29.00; 46.00
Luminous flux [lm]*:	850 - 4900
Colour temperature [K]:	3000; 4000
Colour rendering index:	>80
SDCM:	≤ 3
Electrical protection class:	I
Energy efficiency class:	E; F; G
Material of the body:	aluminium
Colour of the body:	anoda C0
Diffuser material:	PMMA
Diffuser type:	OPAL
Beam angle [°]:	DIR; DIR/IND
Mounting version:	surface
Working temperature [°C]:	from 0 to +25
Supply voltage [V]:	220-240
Frequency [Hz]:	50 - 60
Dimensions (H/W/T/S) [mm]:	1138/125/70; 1138/55/70; 298/125/70; 298/55/70; 578/125/70; 578/55/70

CHARACTERISTICS

Robust frame made of aluminum profile with a very narrow cross profile. The special features of the Smart Led Evo Bracket line include discreet elegance and energy efficiency. The optical system involves an iridescent screen that provides soft light.

The luminaire is available in:

- 3 lengths and 6 powers,
- 2 structural variants: with an additional spacer profile (variant B) or without it (variant A)
- 2 lighting versions: one-sided (DIR) or double-sided (DIR/IND).

APPLICATION

Unique design predisposes these luminaires for the following environments: offices, conference rooms and other representative spaces.

SMART LED EVO BRACKET

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

SMART LED EVO BRACKET A

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Beam angle [°]	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
29	4000	3200	OPAL	DIR	1138/55/70	E	>> 656125
29	3000	2900	OPAL	DIR	1138/55/70	E	>> 656309
46	4000	4900	OPAL	DIR/IND	1138/55/70	E	>> 656156
46	3000	4500	OPAL	DIR/IND	1138/55/70	F	>> 656330
8	4000	900	OPAL	DIR	298/55/70	E	>> 656002
8	3000	850	OPAL	DIR	298/55/70	F	>> 656187
17	4000	1500	OPAL	DIR/IND	298/55/70	F	>> 656033
17	3000	1350	OPAL	DIR/IND	298/55/70	G	>> 656217
17	4000	1800	OPAL	DIR	578/55/70	E	>> 656064
17	3000	1700	OPAL	DIR	578/55/70	F	>> 656248
29	4000	2900	OPAL	DIR/IND	578/55/70	E	>> 656095
29	3000	2700	OPAL	DIR/IND	578/55/70	F	>> 656279

SMART LED EVO BRACKET B

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Beam angle [°]	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
29	4000	3200	OPAL	DIR	1138/125/70	E	>> 656484
29	3000	2900	OPAL	DIR	1138/125/70	E	>> 656668
29	3000	2900	OPAL	DIR	1138/125/70	E	>> 656675
29	3000	2900	OPAL	DIR	1138/125/70	E	>> 656682
46	4000	4900	OPAL	DIR/IND	1138/125/70	E	>> 656514
46	3000	4500	OPAL	DIR/IND	1138/125/70	F	>> 656699
8	4000	920	OPAL	DIR	298/125/70	E	>> 656361
8	3000	850	OPAL	DIR	298/125/70	F	>> 656545
17	4000	1500	OPAL	DIR/IND	298/125/70	F	>> 656392
17	3000	1350	OPAL	DIR/IND	298/125/70	G	>> 656576
17	4000	1800	OPAL	DIR	578/125/70	E	>> 656422
17	3000	1700	OPAL	DIR	578/125/70	F	>> 656606
29	4000	2900	OPAL	DIR/IND	578/125/70	E	>> 656453
29	3000	2700	OPAL	DIR/IND	578/125/70	F	>> 656637

CORONA BASIC LED

GENERAL CARD



TECHNICAL PARAMETERS

Ingress protection:	IP66
Impact resistance:	IK08
Nominal power [W]:	33.00 - 62.00
Luminous flux [lm]*:	5050 - 8600
Colour temperature [K]:	4000; 5700
SDCM:	≤ 3
Colour rendering index:	>80
Electrical protection class:	I; II
Energy efficiency class:	C
Material of the body:	PP+FG; aluminium
Diffuser material:	PC
Optics material:	PC
Optics:	matrix lens
Mounting version:	side, top
Dimensions (H/W/T/S) [mm]:	580/255/125
Warranty [years]:	5

CHARACTERISTICS

Streetlight LED fitting with high luminous flux and an integrated energy-saving LED module. The body made of polypropylene(PP) with fibreglass (GF)and the grip made of aluminium. Thanks to the directional lens (made of PC), the light distribution meets the requirements of PN-EN 13201 lighting class. IP66 ingress protection class and IK08 impact-rating features make this fitting extremely tight and shock-resistant (vandal-resistant). Integrated, step-regulated grip allows to set the fitting by 5 degrees in the range of: 0° to +15° (peak to pole); -15° to 0° (side to boom).

Features: Additional overvoltage protection (SP10kV).

Versions: with H07RN-F o 0.7m cord;with mounting bracket ø76 mm.

APPLICATION

Streetlight fitting used in open spaces to lighten: streets, local roads, bicycle paths, alleys, pavements, car parks and squares. Installation and Mounting: lateral side entry, post-top mounting.Mounting grip integrated with the fitting.

CORONA BASIC LED

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

CORONA BASIC LED

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Electrical protection class	Energy efficiency class	Index
33	4000	5050	I	C	>> 549793
33	4000	5050	II	C	>> 549762
33	5700	5050	I	C	>> 549915
33	5700	5050	II	C	>> 549885
48	4000	6900	I	C	>> 549809
48	4000	6900	II	C	>> 549779
48	5700	6900	I	C	>> 549922
48	5700	6900	II	C	>> 549892
62	4000	8600	I	C	>> 549816
62	4000	8600	II	C	>> 549786
62	5700	8600	I	C	>> 549939
62	5700	8600	II	C	>> 549908


CORONA BASIC LED with cord

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Electrical protection class	Energy efficiency class	Index
33	4000	5050	I	C	>> 549854
33	4000	5050	II	C	>> 549823
33	5700	5050	I	C	>> 549977
33	5700	5050	II	C	>> 549946
48	4000	6900	I	C	>> 549861
48	4000	6900	II	C	>> 549830
48	5700	6900	I	C	>> 549984
48	5700	6900	II	C	>> 549953
62	4000	8600	I	C	>> 549878
62	4000	8600	II	C	>> 549847
62	5700	8600	I	C	>> 549991
62	5700	8600	II	C	>> 549960

CORONA BASIC LED

GENERAL CARD

LUMINOUS INTENSITY DISTRIB. CURVE



CORONA BASIC LED

CORONA BASIC LED

GENERAL CARD

ACCESSORIES AVAILABLE

index	Name
UL00141	mounting grip 76mm
314049	wall holder (galvanized)
314056	wall holder (grey)



mounting grip 76mm (UL00141)



wall holder (galvanized) (314049)



wall holder (grey) (314056)



ASTRA ROAD



Beznarzędziowa wymiana układu zasilającego
12 pozycji położenia źródła
Montaż na słupie 60mm
Zintegrowany z oprawą uchwyt umożliwiający regulację kąta nachylenia oprawy
Montaż poziomy lub pionowy
Oszczędność energii dzięki zastosowaniu reduktora mocy (opcja)
Wysoki stopień szczelności IP66
Wysoka odporność na uderzenia IK08 (FG), IK10 (klosz PC)

Korpus: odlew aluminiowy malowany proszkowo
Klosz: PC (poliwęglan) lub szyba
Klosz: przezroczysty

Opcje na zapytanie:
Reduktor mocy (70W/50W, 100W/70W, 150W/100W, 250W/150W)



Tool-free ignition system replacement
12 levels of light source position
Installation on the pole of 60mm
Integrated holder enabling angle regulation of the fitting
Vertical or horizontal mounting
Energy saving due to power reduction (option)
High ingress protection IP66
High impact protection IK08 (FG), IK10 (PC diffuser)

Body: powder coated aluminium die cast
Diffuser: PC (polycarbonate) or glass
Diffuser: prismatic

Options upon request :
Power reduction (70W/50W, 100W/70W, 150W/100W, 250W/150W)



Werkzeugfreier Austausch der Leuchtmittel
12 Leuchtmittelpositionierungen
Die Mastmontage 60mm
Die Neigungspositionierung mittels eines mit Gehäuse integrieren Griffes
Vertikale oder horizontale Montage
Die Stromeinsparung durch Wattagebegrenzer (optional)
IP66
Hohe Schlagwiderstandsfähigkeit IK08 (FG), IK10 (die Abdeckung aus PC)

Das Gehäuse: Aluguss, pulverbeschichtet
Die Abdeckung: PC (Polycarbonat) oder Glas
Die Abdeckung: klar

Optional auf Anfrage:
Wattagebegrenzer: (70W/50W, 100W/70W, 150W/100W, 250W/150W)



Remplacement de système d'alimentation sans outil
12 positions de source de lumière
Montage sur un mât de 60mm max
Poignée pour le réglage d'inclinaison intégré dans le luminaire
Montage vertical ou horizontal
Economie d'énergie grâce au régulateur de puissance (en option)
Indice de protection IP élevé (IP 66)
Haute résistance mécanique IK08 (FG), IK10 (PC)

Corps: en fonte d'aluminium laqué par poudre
Diffuseur: PC (polycarbonate) ou en verre
Diffuseur: transparent

Options sur demande:
Régulateur de puissance (70W/50W, 100W/70W, 150W/100W, 250W/150W)






Замена системы зажигания без применения инструментов
Регулировка источника света (12 позиций)
Монтаж на опору диаметром 60мм
Монтажный модуль облегчающий регулировку угла наклона светильника
Вертикального или горизонтального монтажа
Энергосбережение благодаря редуктору мощности (по запросу)
Высокая степень герметичности IP66
Высокая степень ударопрочности IK08 (FG), IK10 (плафон PC)

Корпус: алюминиевая отливка, покрыта порошковой краской
Плафон: PC (из поликарбоната) или стеклянный
Плафон: прозрачный

Варианты по запросу:
Редуктор мощности: (70Вт/50Вт, 100Вт/70Вт, 150Вт/100Вт, 250Вт/150Вт)

index index	max moc max power	trzonek end cap	rodzaj klosza type of diffuser	źródło światła light source	waga netto net weight	wymiary produktu product dimensions A/B/C	klasa ochrony security level
709135	1x70W	E27	PC	HS/Hi	8,10	733x300x182	
502477	1x70W	E27	PC	HS/Hi	8,10	733x300x182	
709142	1x100W	E40	PC	HS/Hi	8,10	733x300x182	
709159	1x150W	E40	PC	HS/Hi	8,10	733x300x182	

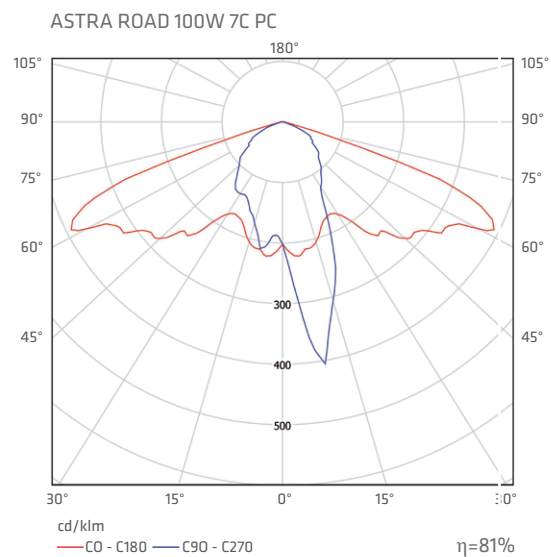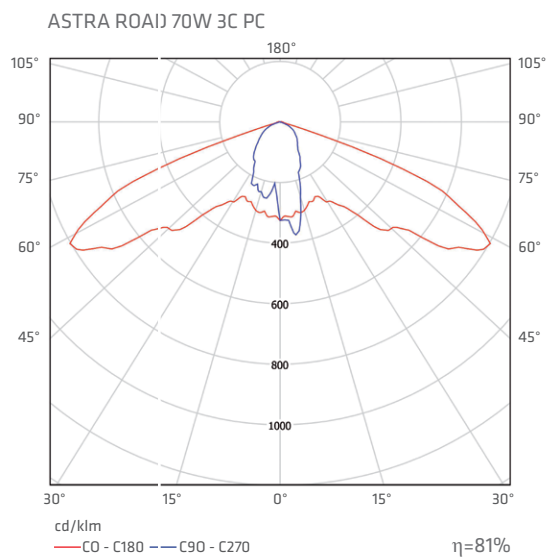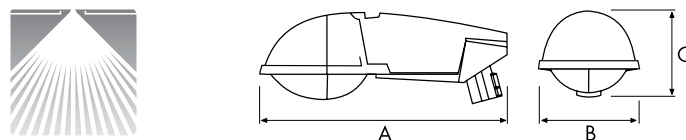

CZYNNOŚCI EKSPLOATACYJNE / MAINTAINING SERVICE



ASTRA ROAD

KŁOŚZ PC LUB SZYBA HARTOWANA / PC DIFFUSOR OR FLAT GLASS



MONTAŻ SZCZYTOWY: REGULOWANY KĄT NACHYLENIA /
HORIZONTAL MOUNTING: ANGLE REGULATION OF THE FITTING



MONTAŻ POZIOMY DO WYSIĘGNIKA / VERTICAL MOUNTING ON THE ARM



FRAGA LED

GENERAL CARD



TECHNICAL PARAMETERS

Light source:	LED module
Ingress protection:	IP43/20
Nominal power [W]:	4.00; 6.00; 11.00; 15.00
Luminous flux [lm]*:	260 - 1150
Colour temperature [K]:	3000; 4000
Colour rendering index:	>80
Energy efficiency class:	F; G
Material of the body:	aluminium, PMMA
Colour of the body:	white
Diffuser material:	PMMA
Diffuser type:	PRM
Mounting version:	recessed
Working temperature [°C]:	from -20 to +35
Supply voltage [V]:	220-240
Frequency [Hz]:	50 - 60
Dimensions (H/W/T/S) [mm]:	ø109/60; ø138/68; ø85/58

CHARACTERISTICS

A downlight luminaire with narrow, 36° wide, light distribution angle and the light beam adjustable within +/-30°. Equipped with modern and energy-efficient COB LED light source. Its body made of aluminium and PMMA ensures optimum LED operating conditions and the diffuser made of highly transparent PMMA guarantees high luminous efficiency of the luminaire. Suitable for tool-free installation in plasterboard ceilings.

APPLICATION

Intended for indoor use in passageways and entry areas.

FRAGA LED

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

FRAGA LED 4W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
4	3000	260	PRM	ø85/58	G	>> 059209
4	4000	270	PRM	ø85/58	G	>> 059216

FRAGA LED 6W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
6	3000	360	PRM	ø85/58	G	>> 059223
6	4000	400	PRM	ø85/58	G	>> 059230

FRAGA LED 11W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
11	3000	640	PRM	ø109/60	G	>> 059247
11	4000	740	PRM	ø109/60	G	>> 059254


FRAGA LED 15W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
15	3000	1000	PRM	ø138/68	G	>> 059261
15	4000	1150	PRM	ø138/68	F	>> 059278

FRAGA LED

GENERAL CARD

LUMINOUS INTENSITY DISTRIB. CURVE



FRAGA LED 15W 4000K

FRAGA LED

GENERAL CARD

ACCESSORIES AVAILABLE

index	Name
059858	Round surface casing - white, 15W
059841	Round surface casing white NECTRA LED IP44 5W, NECTRA LED 5W, 7W, FRAGA LED 11W



Round surface casing - white, 15W (059858)



Round surface casing white NECTRA LED IP44 5W, NECTRA LED 5W, 7W, FRAGA LED 11W (059841)

TYTAN LED

GENERAL CARD



TECHNICAL PARAMETERS

Ingress protection:	IP66
Impact resistance:	IK09
Nominal power [W]:	16.00 - 70.00
Luminous flux [lm]*:	2300 - 10900
Colour temperature [K]:	3000; 4000
Colour rendering index:	>80
SDCM:	≤ 3
Material of the body:	PC
Diffuser material:	PC
Diffuser type:	MAT
Mounting version:	surface, suspended
Dimensions (H/W/T/S) [mm]:	1152/85/80; 1432/85/80
Warranty [years]:	2 / 0.5 (battery); 5

CHARACTERISTICS

TYTAN LED is a fitting from NEXT GEN line, which is a new generation of fittings in LED technology. The fitting, designed from scratch, allows new solutions improving the light distribution and temperature balance. Branded LED diodes and new LED modules have influence on a very high luminous efficacy: 150 lm/W. It guarantees the best required lighting level and energy saving up to 68%. The solution based on integration of the diffuser and LED module is applied in the fitting. The fitting has a lot of facilities making the mounting easier and faster: the system of diffuser suspension, adjustable mounting brackets ensuring the mounting tolerance +/- 40mm. Standard equipment of the fitting: clips made of stainless steel (INOX). Color temperature 3000K, 4000K; CRI>80; Standard Deviation Colour Matching (SDCM): ≤3; lifespan of LED L70B50: 100000h (16W, 29W, 35W, 43W, 46W, 56W) i 90000h (70W), ta=25C. Motion sensor mounting height: up to 5 meters. Electrical protection class II available on request.

APPLICATION

A multipurpose LED fitting intended for using in the areas where high dust and moisture resistance is required. Highly recommended to be used in industrial buildings (factories, laboratories), warehouses, car parks (underground and multilevel), sports stadiums, transport terminals and underground passageways. The fitting works perfectly while designing new applications as well as replacing traditional fluorescent luminaires with energy-saving LED solutions. Its construction is intended both for surface and suspended mounting. Adjustable mounting brackets (the mounting tolerance +/-40mm). Suspended diffuser integrated with LED panel.

TYTAN LED

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

TYTAN LED 16W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Motion sensor	DIMM DALI	Through wiring	Emergency lighting [h]	Version	Dimensions (H/W/T/S) [mm]	Index
16	3000	2300						1152/85/80	>> 907531
16	3000	2300		yes				1152/85/80	>> 907579
16	3000	2300					RAPID-A	1152/85/80	>> 907623
16	3000	2300					RAPID-D	1152/85/80	>> 907647
16	3000	2300	yes					1152/85/80	>> 907555
16	4000	2500						1152/85/80	>> 907548
16	4000	2500		yes				1152/85/80	>> 907586
16	4000	2500					RAPID-A	1152/85/80	>> 907661
16	4000	2500					RAPID-D	1152/85/80	>> 907685
16	4000	2500	yes					1152/85/80	>> 907562
16	3000	2300			LS2			1152/85/80	>> 907593
16	3000	2300			LS2		RAPID-A	1152/85/80	>> 907616
16	3000	2300			LS2		RAPID-D	1152/85/80	>> 907630
16	4000	2500			LS2			1152/85/80	>> 907609
16	4000	2500			LS2		RAPID-A	1152/85/80	>> 907654
16	4000	2500			LS2		RAPID-D	1152/85/80	>> 907678

TYTAN LED 29W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Motion sensor	DIMM DALI	Through wiring	Emergency lighting [h]	Version	Dimensions (H/W/T/S) [mm]	Index
29	3000	4200						1152/85/80	>> 906503
29	3000	4200				3		1152/85/80	>> 906060
29	3000	4200		yes				1152/85/80	>> 906077
29	3000	4200					RAPID-A	1152/85/80	>> 906022
29	3000	4200					RAPID-D	1152/85/80	>> 906046
29	3000	4200	yes					1152/85/80	>> 906084
29	4000	4500						1152/85/80	>> 906091
29	4000	4500				3		1152/85/80	>> 906152
29	4000	4500		yes				1152/85/80	>> 906169
29	4000	4500					RAPID-A	1152/85/80	>> 906114
29	4000	4500					RAPID-D	1152/85/80	>> 906138
29	4000	4500	yes					1152/85/80	>> 906176
29	3000	4200			LS2			1152/85/80	>> 906015
29	3000	4200			LS2		RAPID-A	1152/85/80	>> 906039

TYTAN LED

GENERAL CARD

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Motion sensor	DIMM DALI	Through wiring	Emergency lighting [h]	Version	Dimensions (H/W/T/S) [mm]	Index
29	3000	4200			LS2		RAPID-D	1152/85/80	>> 907326
29	4000	4500			LS2			1152/85/80	>> 906107
29	4000	4500			LS2		RAPID-A	1152/85/80	>> 906121
29	4000	4500			LS2		RAPID-D	1152/85/80	>> 906441

TYTAN LED 35W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Motion sensor	DIMM DALI	Through wiring	Emergency lighting [h]	Version	Dimensions (H/W/T/S) [mm]	Index
35	3000	5200						1432/85/80	>> 906541
35	3000	5200				3		1432/85/80	>> 906602
35	3000	5200		yes				1432/85/80	>> 906619
35	3000	5200					RAPID-A	1432/85/80	>> 906565
35	3000	5200					RAPID-D	1432/85/80	>> 906589
35	3000	5200	yes					1432/85/80	>> 906626
35	4000	5500						1432/85/80	>> 906633
35	4000	5500				3		1432/85/80	>> 906695
35	4000	5500		yes				1432/85/80	>> 906701
35	4000	5500					RAPID-A	1432/85/80	>> 906657
35	4000	5500					RAPID-D	1432/85/80	>> 906671
35	4000	5500	yes					1432/85/80	>> 906718
35	3000	5200			LS2			1432/85/80	>> 906558
35	3000	5200			LS2		RAPID-A	1432/85/80	>> 906572
35	3000	5200			LS2		RAPID-D	1432/85/80	>> 906596
35	4000	5500			LS2			1432/85/80	>> 906640
35	4000	5500			LS2		RAPID-A	1432/85/80	>> 906664
35	4000	5500			LS2		RAPID-D	1432/85/80	>> 906688

TYTAN LED 43W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Motion sensor	DIMM DALI	Through wiring	Emergency lighting [h]	Version	Dimensions (H/W/T/S) [mm]	Index
43	3000	6500						1432/85/80	>> 907425
43	3000	6500				3		1432/85/80	>> 907432
43	3000	6500		yes				1432/85/80	>> 907449
43	3000	6500					RAPID-A	1432/85/80	>> 907463
43	3000	6500					RAPID-D	1432/85/80	>> 907487
43	3000	6500	yes					1432/85/80	>> 907500
43	4000	7000						1432/85/80	>> 907333
43	4000	7000				3		1432/85/80	>> 907340
43	4000	7000		yes				1432/85/80	>> 907357
43	4000	7000					RAPID-A	1432/85/80	>> 907371

TYTAN LED

GENERAL CARD

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Motion sensor	DIMM DALI	Through wiring	Emergency lighting [h]	Version	Dimensions (H/W/T/S) [mm]	Index
43	4000	7000					RAPID-D	1432/85/80	>> 907395
43	4000	7000	yes					1432/85/80	>> 907418
43	3000	6500			LS2			1432/85/80	>> 907456
43	3000	6500			LS2		RAPID-A	1432/85/80	>> 907470
43	3000	6500			LS2		RAPID-D	1432/85/80	>> 907494
43	4000	7000			LS2			1432/85/80	>> 907364
43	4000	7000			LS2		RAPID-A	1432/85/80	>> 907388
43	4000	7000			LS2		RAPID-D	1432/85/80	>> 907401

TYTAN LED 46W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Motion sensor	DIMM DALI	Through wiring	Emergency lighting [h]	Version	Dimensions (H/W/T/S) [mm]	Index
46	3000	7000						1152/85/80	>> 906367
46	3000	7000				3		1152/85/80	>> 906428
46	3000	7000		yes				1152/85/80	>> 906435
46	3000	7000					RAPID-A	1152/85/80	>> 906381
46	3000	7000					RAPID-D	1152/85/80	>> 906404
46	3000	7000	yes					1152/85/80	>> 906442
46	4000	7400						1152/85/80	>> 906459
46	4000	7400				3		1152/85/80	>> 906510
46	4000	7400		yes				1152/85/80	>> 906527
46	4000	7400					RAPID-A	1152/85/80	>> 906473
46	4000	7400					RAPID-D	1152/85/80	>> 906497
46	4000	7400	yes					1152/85/80	>> 906534
46	3000	7000			LS2			1152/85/80	>> 906374
46	3000	7000			LS2		RAPID-A	1152/85/80	>> 906398
46	3000	7000			LS2		RAPID-D	1152/85/80	>> 906237
46	4000	7400			LS2			1152/85/80	>> 906466
46	4000	7400			LS2		RAPID-A	1152/85/80	>> 906480
46	4000	7400			LS2		RAPID-D	1152/85/80	>> 906329

TYTAN LED 56W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Motion sensor	DIMM DALI	Through wiring	Emergency lighting [h]	Version	Dimensions (H/W/T/S) [mm]	Index
56	3000	8600						1152/85/80	>> 906183
56	3000	8600				3		1152/85/80	>> 906244
56	3000	8600		yes				1152/85/80	>> 906251
56	3000	8600					RAPID-A	1152/85/80	>> 906206
56	3000	8600					RAPID-D	1152/85/80	>> 906220
56	3000	8600	yes					1152/85/80	>> 906268

TYTAN LED

GENERAL CARD

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Motion sensor	DIMM DALI	Through wiring	Emergency lighting [h]	Version	Dimensions (H/W/T/S) [mm]	Index
56	4000	9000						1152/85/80	>> 906275
56	4000	9000				3		1152/85/80	>> 906336
56	4000	9000		yes				1152/85/80	>> 906343
56	4000	9000					RAPID-A	1152/85/80	>> 906299
56	4000	9000					RAPID-D	1152/85/80	>> 906312
56	4000	9000	yes					1152/85/80	>> 906350
56	3000	8600			LS2			1152/85/80	>> 906190
56	3000	8600			LS2		RAPID-A	1152/85/80	>> 906213
56	3000	8600			LS2		RAPID-D	1152/85/80	>> 906053
56	4000	9000			LS2			1152/85/80	>> 906282
56	4000	9000			LS2		RAPID-A	1152/85/80	>> 906305
56	4000	9000			LS2		RAPID-D	1152/85/80	>> 906145


TYTAN LED 70W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Motion sensor	DIMM DALI	Through wiring	Emergency lighting [h]	Version	Dimensions (H/W/T/S) [mm]	Index
70	3000	10300						1432/85/80	>> 906725
70	3000	10300				3		1432/85/80	>> 906787
70	3000	10300		yes				1432/85/80	>> 906794
70	3000	10300					RAPID-A	1432/85/80	>> 906749
70	3000	10300					RAPID-D	1432/85/80	>> 906763
70	3000	10300	yes					1432/85/80	>> 906800
70	4000	10900						1432/85/80	>> 906817
70	4000	10900				3		1432/85/80	>> 906879
70	4000	10900	yes			3		1432/85/80	>> 907777
70	4000	10900		yes				1432/85/80	>> 906886
70	4000	10900					RAPID-A	1432/85/80	>> 906831
70	4000	10900					RAPID-D	1432/85/80	>> 906855
70	4000	10900	yes					1432/85/80	>> 906893
70	4000	9800						1432/85/80	>> 908460
70	3000	10300			LS2			1432/85/80	>> 906732
70	3000	10300			LS2		RAPID-A	1432/85/80	>> 906756
70	3000	10300			LS2		RAPID-D	1432/85/80	>> 906770
70	4000	10900			LS2			1432/85/80	>> 906824
70	4000	10900			LS2		RAPID-A	1432/85/80	>> 906848
70	4000	10900			LS2		RAPID-D	1432/85/80	>> 906862

TYTAN LED

GENERAL CARD

LUMINOUS INTENSITY DISTRIB. CURVE



TYTAN 2 LED

TYTAN LED

GENERAL CARD

ACCESSORIES AVAILABLE

index	Name
907265	TYTAN LED 1150mm 4200lm 830 - lighting module
907272	TYTAN LED 1150mm 4500lm 840 - lighting module
907289	TYTAN LED 1150mm 7000/8600lm 830 - lighting module
907296	TYTAN LED 1150mm 7400/9000lm 840 - lighting module
907755	TYTAN LED 1450mm 5200lm 830 - lighting module
907760	TYTAN LED 1450mm 5500lm 840 - lighting module
907302	TYTAN LED 1450mm 6500/10300lm 830 - lighting module
907319	TYTAN LED 1450mm 7000/10900lm 840 - lighting module
908200	TYTAN LED, ATLAS LED, INDUSTRY LED - adjustable handle (set of 2)
907913	TYTAN LED, ATLAS LED - protective grid 1152mm
907920	TYTAN LED, ATLAS LED - protective grid 1432mm
16000507	Breathable gland gray M20*1.5 IP68
909009	TYTAN LED 1150mm 2300lm 830 - lighting module (2018.09)
909016	TYTAN LED 1150mm 2500lm 840 - lighting module (2018.09)
60000006	M16 stuffing box plug various PA black M-16 - BPM-21
80000378	Cable gland PG 13.5 Titanium PA 6.6 gray with nut
908231	TYTAN LED - holder
80000279	Gland, beam, Codar, soft polyvinyl chloride (PVC-P), gray

TYTAN LED

GENERAL CARD




TYTAN LED 1150mm 4200lm 830 - lighting module (907265)



TYTAN LED 1150mm 4500lm 840 - lighting module (907272)



TYTAN LED 1150mm 7000/8600lm 830 - lighting module (907289)



TYTAN LED 1150mm 7400/9000lm 840 - lighting module (907296)



TYTAN LED 1450mm 5200lm 830 - lighting module (907755)




TYTAN LED 1450mm 5500lm 840 - lighting module (907760)



TYTAN LED 1450mm 6500/10300lm 830 - lighting module (907302)



TYTAN LED 1450mm 7000/10900lm 840 - lighting module (907319)



TYTAN LED, ATLAS LED, INDUSTRY LED - adjustable handle (set of 2) (908200)



TYTAN LED, ATLAS LED - protective grid 1152mm (907913)



TYTAN LED, ATLAS LED - protective grid 1432mm (907920)



Breathable gland gray M20*1.5 IP68 (16000507)



TYTAN LED 1150mm 2300lm 830 - lighting module (2018.09) (909009)



TYTAN LED 1150mm 2500lm 840 - lighting module (2018.09) (909016)

NECTRA LED

GENERAL CARD



TECHNICAL PARAMETERS

Ingress protection:	IP44/20
Nominal power [W]:	5.00 - 18.00
Luminous flux [lm]*:	360 - 1500
Colour temperature [K]:	3000; 4000
Colour rendering index:	>80
Energy efficiency class:	F; G
Material of the body:	aluminium
Colour of the body:	white
Diffuser material:	PC
Diffuser type:	OPAL
Mounting version:	recessed
Working temperature [°C]:	from -15 to +35
Supply voltage [V]:	220-240
Frequency [Hz]:	50 - 60
Dimensions (H/W/T/S) [mm]:	ø108/51; ø116/51; ø146/67; ø182/62; ø194/62

CHARACTERISTICS

Downlight type fitting with an integrated energy-saving LED source. Made of lightweight aluminium and plastic. Available in two ringcolours and three power versions. Its distinctive features are low profile, light weight and very easy and fast installation.

APPLICATION

Design for both solid and modular ceilings.

NECTRA LED

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

NECTRA LED 5W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
5	3000	360	OPAL	ø108/51	G	>> 059520
5	4000	370	OPAL	ø108/51	F	>> 059537

NECTRA LED 7W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
7	3000	540	OPAL	ø116/51	F	>> 059551
7	4000	570	OPAL	ø116/51	F	>> 059568

NECTRA LED 9W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
9	3000	710	OPAL	ø146/67	F	>> 059582
9	4000	720	OPAL	ø146/67	F	>> 059599

NECTRA LED 12W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
12	3000	880	OPAL	ø182/62	F	>> 059605
12	4000	910	OPAL	ø182/62	F	>> 059629

NECTRA LED 15W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
15	3000	1200	OPAL	ø194/62	F	>> 059643
15	4000	1250	OPAL	ø194/62	F	>> 059667


NECTRA LED 18W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
18	3000	1400	OPAL	ø234/67	F	>> 059681
18	4000	1500	OPAL	ø234/67	F	>> 059704

NECTRA LED

GENERAL CARD

LUMINOUS INTENSITY DISTRIB. CURVE



NECTRA LED 18W 4000K

NECTRA LED

GENERAL CARD

ACCESSORIES AVAILABLE

index	Name
059735	Round surface casing white NECTRA LED IP44 15W, NECTRA LED 12W
059759	Round surface casing white NECTRA LED IP44 20W, 25W, NECTRA LED 18W
059858	Round surface casing - white, 15W
059841	Round surface casing white NECTRA LED IP44 5W, NECTRA LED 5W, 7W, FRAGA LED 11W
060922	Round surface casing white NECTRA LED IP44 9W, NECTRA LED 7W, FRAGA 11W



Round surface casing white NECTRA LED IP44 15W, NECTRA LED 12W (059735)



Round surface casing white NECTRA LED IP44 20W, 25W, NECTRA LED 18W (059759)



Round surface casing - white, 15W (059858)



Round surface casing white NECTRA LED IP44 5W, NECTRA LED 5W, 7W, FRAGA LED 11W (059841)



Round surface casing white NECTRA LED IP44 9W, NECTRA LED 7W, FRAGA 11W (060922)

TYTAN LED HALL

GENERAL CARD



TECHNICAL PARAMETERS

Ingress protection:	IP66
Impact resistance:	IK09
Nominal power [W]:	56.00; 70.00
Luminous flux [lm]*:	7350 - 9800
Colour temperature [K]:	3000; 4000
Colour rendering index:	>80
SDCM:	≤ 3
Material of the body:	PC
Diffuser material:	PC
Diffuser type:	transparent
Optics:	lens
Mounting version:	surface, suspended
Dimensions (H/W/T/S) [mm]:	1152/85/80; 1432/85/80
Warranty [years]:	5

CHARACTERISTICS

TYTAN LED is a fitting from NEXT GEN line, which is a new generation of fittings in LED technology. The fitting, designed from scratch, allows new solutions improving the light distribution and temperature balance. Branded LED diodes and new LED modules have influence on a very high luminous efficacy: 150 lm/W. It guarantees the best required lighting level and energy saving up to 68%. The solution based on integration of the diffuser and LED module is applied in the fitting. The fitting has a lot of facilities making the mounting easier and faster: the system of diffuser suspension, adjustable mounting brackets ensuring the mounting tolerance +/- 40mm. Standard equipment of the fitting: clips made of stainless steel (INOX). Electrical protection class II available on request. Motion sensor mounting height: up to 5 meters.

TYTAN LED series has won the first prize in technical and commercial area lighting category during the 25th International Fair of Lighting Equipment LIGHT 2017 in Warsaw.

APPLICATION

The multifunctional LED lamp is designed for use in areas with high requirements for dust and water resistance. Especially recommended for lighting public facilities, including hospitals, educational facilities, halls, garages, passages, warehouses, shops, food industry, commercial and industrial facilities (factories, laboratories), warehouses, parking lots (underground and multi-level), sports stadiums, transport terminals and underground passages. The luminaire is ideal for new lighting applications as well as replacing traditional fluorescent luminaires with energy-saving LED solutions. Its design is adapted for surface and suspended mounting.

TYTAN LED HALL

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

TYTAN LED HALL 56W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	DIMM DALI	Through wiring	Version	Dimensions (H/W/T/S) [mm]	Index
56	3000	7350				1152/85/80	>> 906909
56	3000	7350	yes			1152/85/80	>> 906978
56	4000	7800				1152/85/80	>> 906992
56	4000	7800	yes			1152/85/80	>> 907067
56	3000	7350		LS2		1152/85/80	>> 906916
56	4000	7800		LS2		1152/85/80	>> 907005


TYTAN LED HALL 70W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	DIMM DALI	Through wiring	Version	Dimensions (H/W/T/S) [mm]	Index
70	3000	9200				1432/85/80	>> 907081
70	3000	9200	yes			1432/85/80	>> 907159
70	4000	9800				1432/85/80	>> 907173
70	4000	9800	yes			1432/85/80	>> 907241
70	3000	9200		LS2		1432/85/80	>> 907098
70	4000	9800		LS2		1432/85/80	>> 907180
70	4000	9800		LS2	RAPID-A	1432/85/80	>> 907203
70	4000	9800		LS2	RAPID-D	1432/85/80	>> 907227

TYTAN LED HALL

GENERAL CARD

LUMINOUS INTENSITY DISTRIB. CURVE




tytan hall 10092018

TYTAN LED HALL


GENERAL CARD

ACCESSORIES AVAILABLE


index	Name
907708	TYTAN LED HALL 1150mm 7350lm 830 - lighting module
907715	TYTAN LED HALL 1150mm 7800lm 840 - lighting module
907739	TYTAN LED HALL 1450mm 9200lm 830 - lighting module
907746	TYTAN LED HALL 1450mm 9800lm 840 - lighting module
908200	TYTAN LED, ATLAS LED, INDUSTRY LED - adjustable handle (set of 2)
907913	TYTAN LED, ATLAS LED - protective grid 1152mm
907920	TYTAN LED, ATLAS LED - protective grid 1432mm
16000507	Breathable gland gray M20*1.5 IP68
60000006	M16 stuffing box plug various PA black M-16 - BPM-21
80000378	Cable gland PG 13.5 Titanium PA 6.6 gray with nut
908231	TYTAN LED - holder
80000279	Gland, beam, Codar, soft polyvinyl chloride (PVC-P), gray




TYTAN LED HALL 1150mm 7350lm 830 - lighting module (907708)




TYTAN LED HALL 1150mm 7800lm 840 - lighting module (907715)



TYTAN LED HALL 1450mm 9200lm 830 - lighting module (907739)



TYTAN LED HALL 1450mm 9800lm 840 - lighting module (907746)



TYTAN LED, ATLAS LED, INDUSTRY LED - adjustable handle (set of 2) (908200)



TYTAN LED, ATLAS LED - protective grid 1152mm (907913)



TYTAN LED, ATLAS LED - protective grid 1432mm (907920)



Breathable gland gray M20*1.5 IP68 (16000507)

NECTRA LED IP44

GENERAL CARD



TECHNICAL PARAMETERS

Ingress protection:	IP44/20
Nominal power [W]:	5.00 - 25.00
Luminous flux [lm]*:	400 - 2250
Colour temperature [K]:	3000; 4000
Colour rendering index:	>80
Energy efficiency class:	A+; F
Material of the body:	PC, aluminium
Diffuser material:	PMMA
Diffuser type:	OPAL
Mounting version:	recessed
Working temperature [°C]:	from -15 to +35
Supply voltage [V]:	220-240
Frequency [Hz]:	50 - 60
Dimensions (H/W/T/S) [mm]:	ø100/63; ø121/67; ø170/69; ø222/70

CHARACTERISTICS

Downlight type fitting with an integrated energy-saving LED source. Made of lightweight aluminium and plastic. Available in two ringcolours and three power versions. Its distinctive features are low profile, light weight and very easy and fast installation. Design for both solid and modular ceilings.

APPLICATION

Designed for indoor use in common areas, passageways or to provide additional illumination in the office rooms. Due to equal surface illumination and high energy savings, it is especially recommended for public buildings. Available in three power versions and two colour options

NECTRA LED IP44

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

NECTRA LED IP44 5W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	DIMM DALI	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
5	3000	400	OPAL		ø100/63	F	>> 059902
5	4000	410	OPAL		ø100/63	F	>> 059919

NECTRA LED IP44 9W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	DIMM DALI	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
9	3000	690	OPAL		ø121/67	F	>> 059926
9	4000	710	OPAL		ø121/67	F	>> 059933

NECTRA LED IP44 15W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	DIMM DALI	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
15	3000	1290	OPAL		ø170/69	F	>> 059940
15	4000	1300	OPAL		ø170/69	F	>> 059957

NECTRA LED IP44 20W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	DIMM DALI	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
20	3000	2000	OPAL		ø222/70	A+	>> 059384
20	4000	2150	OPAL		ø222/70	A+	>> 059391


NECTRA LED IP44 25W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	DIMM DALI	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
25	3000	2200	OPAL		ø222/70	F	>> 059964
25	4000	2250	OPAL		ø222/70	F	>> 059971

NECTRA LED IP44

GENERAL CARD

LUMINOUS INTENSITY DISTRIB. CURVE



NECTRA LED IP44 25W

NECTRA LED IP44

GENERAL CARD

ACCESSORIES AVAILABLE

index	Name
059735	Round surface casing white NECTRA LED IP44 15W, NECTRA LED 12W
059759	Round surface casing white NECTRA LED IP44 20W, 25W, NECTRA LED 18W
059841	Round surface casing white NECTRA LED IP44 5W, NECTRA LED 5W, 7W, FRAGA LED 11W
059995	NECTRA LED IP44 20W / 25W SURFACE CASEING PC (ø220 / 70)
060922	Round surface casing white NECTRA LED IP44 9W, NECTRA LED 7W, FRAGA 11W



Round surface casing white NECTRA LED IP44 15W, NECTRA LED 12W (059735)



Round surface casing white NECTRA LED IP44 20W, 25W, NECTRA LED 18W (059759)



Round surface casing white NECTRA LED IP44 5W, NECTRA LED 5W, 7W, FRAGA LED 11W (059841)



NECTRA LED IP44 20W / 25W SURFACE CASEING PC (ø220 / 70) (059995)



Round surface casing white NECTRA LED IP44 9W, NECTRA LED 7W, FRAGA 11W (060922)

TYTAN LED ENDURA

GENERAL CARD



TECHNICAL PARAMETERS

Ingress protection:	IP66
Impact resistance:	IK09
Nominal power [W]:	26.00 - 70.00
Luminous flux [lm]*:	4350 - 10900
Colour temperature [K]:	4000
Colour rendering index:	>80
SDCM:	≤ 3
Material of the body:	PC
Diffuser material:	PC
Diffuser type:	MAT
Mounting version:	surface, suspended
Dimensions (H/W/T/S) [mm]:	1152/85/80; 1432/85/80

CHARACTERISTICS

TYTAN LED is a fitting from NEXT GEN line, which is a new generation of fittings in LED technology. The fitting, designed from scratch, allows new solutions improving the light distribution and temperature balance. Branded led diodes and new LED modules have influence on a very high luminous flux: 150 lm/W. It guarantees the best required lighting level and energy saving up to 68%. The solution based on integration of the diffuser and LED modul is applied in the fitting. The fitting has a lot of facilities making the mounting easier and faster: the system of diffuser suspension, adjustable mounting brackets ensuring the mounting tolerance +/- 40mm. Standard equipment of the fitting: clips made of stainless steel (INOX). TYTAN LED series has won the first prize in technical and commercial area lighting category during the 25th International Fair of Lighting Equipment LIGHT 2017 in Warsaw.

APPLICATION

The multifunctional LED lamp is designed for use in areas with high requirements for dust and water resistance. Especially recommended for lighting public facilities, including hospitals, educational facilities, halls, garages, passages, warehouses, shops, food industry, commercial and industrial facilities (factories, laboratories), warehouses, parking lots (underground and multi-level), sports stadiums, transport terminals and underground passages. The luminaire is ideal for new lighting applications as well as replacing traditional fluorescent luminaires with energy-saving LED solutions. Its design is adapted for surface and suspended mounting.

TYTAN LED ENDURA

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

TYTAN LED ENDURA MINUS

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Dimensions (H/W/T/S) [mm]	Index
56	4000	9000	MAT	1152/85/80	>> 358043
70	4000	10900	MAT	1432/85/80	>> 358050


TYTAN LED ENDURA PLUS

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Dimensions (H/W/T/S) [mm]	Index
26	4000	4350	MAT	1152/85/80	>> 358029
33	4000	5500	MAT	1432/85/80	>> 358036

TYTAN LED ENDURA

GENERAL CARD

LUMINOUS INTENSITY DISTRIB. CURVE



TYTAN 2 LED

TYTAN LED ENDURA

GENERAL CARD

ACCESSORIES AVAILABLE

index	Name
907913	TYTAN LED, ATLAS LED - protective grid 1152mm
907920	TYTAN LED, ATLAS LED - protective grid 1432mm
16000507	Breathable gland gray M20*1.5 IP68
60000006	M16 stuffing box plug various PA black M-16 - BPM-21
908231	TYTAN LED - holder
80000279	Gland, beam, Codar, soft polyvinyl chloride (PVC-P), gray



TYTAN LED, ATLAS LED - protective grid 1152mm (907913)



TYTAN LED, ATLAS LED - protective grid 1432mm (907920)



Breathable gland gray M20*1.5 IP68 (16000507)

TYTAN LED CHEMO

GENERAL CARD



TECHNICAL PARAMETERS

Ingress protection:	IP66
Impact resistance:	IK09
Nominal power [W]:	29.00 - 70.00
Luminous flux [lm]*:	4500 - 10900
Colour temperature [K]:	4000
Colour rendering index:	>80
SDCM:	≤ 3
Material of the body:	ABS
Colour of the body:	RAL 7040
Diffuser material:	PCT-G
LED lifespan L70B50 [h]:	116000
Warranty [years]:	2 / 0.5 (battery); 5

CHARACTERISTICS

TYTAN LED is a fitting from NEXT GEN line, which is a new generation of fittings in LED technology. The fitting, designed from scratch, allows new solutions improving the light distribution and temperature balance. Branded LED diodes and new LED modules have influence on a very high luminous efficacy: 150 lm/W. It guarantees the best required lighting level and energy saving up to 68%. The solution based on integration of the diffuser and LED module is applied in the fitting. The fitting has a lot of facilities making the mounting easier and faster: the system of diffuser suspension, adjustable mounting brackets ensuring the mounting tolerance +/- 40mm. Standard equipment of the fitting: clips made of stainless steel (INOX). Motion sensor mounting height: up to 5 meters.

The body is made of ABS and diffuser of the luminaire is made of copolyester (PCT-G), characterised by higher resistance to chemicals like, for example, ammonia and chemical disinfectants. As a result, it can be used in a tough chemical environment without any cracks, misting or scratches.

The material of the diffuser is GREENGUARD certified, thus ensuring that the luminaires for indoor use meet strict chemical emission limits, and contributing to healthier indoor environments.

APPLICATION

The multifunction LED lighting fixture is designed for use in areas with high requirements regarding dust tightness and water tightness. Especially recommended for:

- buildings where breeding animals are kept;
- medical rooms where chemical disinfectants are used.

TYTAN LED CHEMO

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

TYTAN LED CHEMO 29W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	Through wiring	Emergency lighting [h]	Dimensions (H/W/T/S) [mm]	Index
29	4000	4500	MAT			3	1152/85/80	>> 358333
29	4000	4500	MAT				1152/85/80	>> 358302
29	4000	4500	MAT	yes			1152/85/80	>> 358326
29	4000	4500	MAT		LS2		1152/85/80	>> 358319

TYTAN LED CHEMO 35W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	Through wiring	Emergency lighting [h]	Dimensions (H/W/T/S) [mm]	Index
35	4000	5500	MAT				1432/85/80	>> 358722

TYTAN LED CHEMO 46W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	Through wiring	Emergency lighting [h]	Dimensions (H/W/T/S) [mm]	Index
46	4000	7400	MAT			3	1152/85/80	>> 358371
46	4000	7400	MAT				1152/85/80	>> 358340
46	4000	7400	MAT	yes			1152/85/80	>> 358364
46	4000	7400	MAT		LS2		1152/85/80	>> 358357

TYTAN LED CHEMO 70W


Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	Through wiring	Emergency lighting [h]	Dimensions (H/W/T/S) [mm]	Index
70	4000	10900	MAT				1432/85/80	>> 358739

TYTAN LED CHEMO

GENERAL CARD

ACCESSORIES AVAILABLE

index	Name
908200	TYTAN LED, ATLAS LED, INDUSTRY LED - adjustable handle (set of 2)
907913	TYTAN LED, ATLAS LED - protective grid 1152mm
907920	TYTAN LED, ATLAS LED - protective grid 1432mm
358388	TYTAN LED CHEMO 1150mm 4500lm 840 - lighting module
358395	TYTAN LED CHEMO 1150mm 7400lm 840 - lighting module
16000507	Breathable gland gray M20*1.5 IP68
358753	TYTAN LED CHEMO 1450mm 10900lm 840 - lighting module
358746	TYTAN LED CHEMO 1450mm 5500lm 840 - lighting module
60000006	M16 stuffing box plug various PA black M-16 - BPM-21
80000378	Cable gland PG 13.5 Titanium PA 6.6 gray with nut
908231	TYTAN LED - holder
80000279	Gland, beam, Codar, soft polyvinyl chloride (PVC-P), gray



TYTAN LED, ATLAS LED, INDUSTRY LED - adjustable handle (set of 2) (908200)




TYTAN LED, ATLAS LED - protective grid 1152mm (907913)



TYTAN LED, ATLAS LED - protective grid 1432mm (907920)




TYTAN LED CHEMO 1150mm 4500lm 840 - lighting module (358388)



TYTAN LED CHEMO 1150mm 7400lm 840 - lighting module (358395)



Breathable gland gray M20*1.5 IP68 (16000507)



TYTAN LED CHEMO 1450mm 10900lm 840 - lighting module (358753)



TYTAN LED CHEMO 1450mm 5500lm 840 - lighting module (358746)

MOON 800 LED

GENERAL CARD



TECHNICAL PARAMETERS

Nominal power [W]:	55.00; 110.00
Luminous flux [lm]*:	5200; 10050
Colour temperature [K]:	4000
Energy efficiency class:	F
Diffuser type:	MAT
Dimensions (H/W/T/S) [mm]:	810/180
Ingress protection:	IP40
Material of the body:	powder coated steel
Diffuser material:	PMMA
Mounting version:	surface
Warranty [years]:	2

CHARACTERISTICS

A family of surface-mounted circular LED luminaires with a very large diffuser diameter and an integrated, energy-saving LED panel. It is characterized by high light efficiency and uniform light distribution. Its base is made of plastic. The lightweight, white diffuser is made with the use of thermoforming method. The simple mounting system of the diffuser does not require the use of additional tools.

APPLICATION

The surface-mounted luminaire is designed for indoor use. It is characterized by uniform light distribution and good illumination of the surface, being therefore especially dedicated as a source of general light in representative rooms and passageways. Excellent illumination and decorative parameters make the luminaire ideal for large conference rooms.

MOON 800 LED

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

MOON 800 LED 55W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Index
55	4000	5200	MAT	>> 953002

MOON 800 LED 110W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Index
110	4000	10050	MAT	>> 953019

NECTRA S LED

GENERAL CARD



TECHNICAL PARAMETERS

Ingress protection:	IP40
Nominal power [W]:	12.00 - 26.00
Luminous flux [lm]*:	850 - 2100
Colour temperature [K]:	3000; 4000
Colour rendering index:	>80
Electrical protection class:	II
Energy efficiency class:	A
Material of the body:	aluminium
Colour of the body:	white
Diffuser type:	OPAL
Mounting version:	surface
Dimensions (H/W/T/S) [mm]:	ø116/63; ø215/80

CHARACTERISTICS

Surface-mounted downlight luminaire equipped with energy-saving LED light source. Body made of white powder-coated aluminium ensures optimal conditions for the LED operation . The diffuser is made of highly transparent PMMA to guarantee high luminous flux. Colour temperature 3000K, 4000K; CRI>80.

APPLICATION

The surface mounted luminaire is intended for indoor use: in offices, passageways, general utility rooms. Due to the high energy saving and even light distribution on the surface, it is recommended for use in public buildings.

NECTRA S LED

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

NECTRA S LED 12W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
12	3000	850	OPAL	ø116/63	A	>> 060588/P
12	4000	900	OPAL	ø116/63	A	>> 060595/P

NECTRA S LED 18W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
18	3000	1350	OPAL	ø215/80	A	>> 060601/P
18	4000	1450	OPAL	ø215/80	A	>> 060618/P


NECTRA S LED 26W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
26	3000	1950	OPAL	ø215/80	A	>> 060625/P
26	4000	2100	OPAL	ø215/80	A	>> 060632/P

NECTRA S LED

GENERAL CARD

LUMINOUS INTENSITY DISTRIB. CURVE



nectra s led 18W 4000K

TYTAN LED 24-48V

GENERAL CARD



TECHNICAL PARAMETERS

Ingress protection:	IP66
Impact resistance:	IK09
Nominal power [W]:	20.00
Luminous flux [lm]*:	2540 - 2700
Colour temperature [K]:	3000; 4000
SDCM:	≤ 3
Material of the body:	PC
Colour of the body:	grey
Diffuser type:	MAT
Beam angle [°]:	120
Mounting version:	surface, suspended
Supply voltage [V]:	24 - 48
Frequency [Hz]:	50 - 60
Dimensions (H/W/T/S) [mm]:	1152/80/85
Warranty [years]:	5

CHARACTERISTICS

TYTAN LED is a fitting from NEXT GEN line, which is a new generation of fittings in LED technology. The fitting, designed from scratch, allows new solutions improving the light distribution and temperature balance. Branded LED diodes and new LED modules have influence on a very high luminous efficacy: 150 lm/W. It guarantees the best required lighting level and energy saving up to 68%. The solution based on integration of the diffuser and LED module is applied in the fitting. The fitting has a lot of facilities making the mounting easier and faster: the system of diffuser suspension, adjustable mounting brackets ensuring the mounting tolerance +/- 40mm. Standard equipment of the fitting: clips made of stainless steel (INOX). Color temperature 3000K, 4000K; CRI>80; Standard Deviation Colour Matching (SDCM): ≤3. Electrical protection class II available on request.

APPLICATION

The multifunctional LED lamp is designed for use in areas with high requirements for dust and water resistance. Especially recommended for lighting public facilities, including hospitals, educational facilities, halls, garages, passages, warehouses, shops, food industry, commercial and industrial facilities (factories, laboratories), warehouses, parking lots (underground and multi-level), sports stadiums, transport terminals and underground passages. The luminaire is ideal for new lighting applications as well as replacing traditional fluorescent luminaires with energy-saving LED solutions. Its design is adapted for surface and suspended mounting.

TYTAN LED 24-48V

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Dimensions (H/W/T/S) [mm]	Index
20	3000	2540	MAT	1152/80/85	>> 358111
20	4000	2700	MAT	1152/80/85	>> 358104

TYTAN LED 24-48V

GENERAL CARD

ACCESSORIES AVAILABLE

index	Name
907913	TYTAN LED, ATLAS LED - protective grid 1152mm
907920	TYTAN LED, ATLAS LED - protective grid 1432mm
16000507	Breathable gland gray M20*1.5 IP68
908231	TYTAN LED - holder
80000279	Gland, beam, Codar, soft polyvinyl chloride (PVC-P), gray



TYTAN LED, ATLAS LED - protective grid 1152mm (907913)



TYTAN LED, ATLAS LED - protective grid 1432mm (907920)



Breathable gland gray M20*1.5 IP68 (16000507)

MIRRA LED

GENERAL CARD



TECHNICAL PARAMETERS

Ingress protection:	IP44
Nominal power [W]:	20.00
Luminous flux [lm]*:	1600
Colour temperature [K]:	4000
Colour rendering index:	>80
Electrical protection class:	II
Energy efficiency class:	F
Material of the body:	PC
Colour of the body:	white
Diffuser material:	PC
Diffuser type:	OPAL
Optics material:	PC
Mounting version:	surface, wall mounted
Dimensions (H/W/T/S) [mm]:	52/69/900
Warranty [years]:	2

CHARACTERISTICS

Versatile LED luminaire intended for indoor use in rooms with increased humidity. It is widely used in office and commercial facilities, in particular, bathrooms and toilets. Body made of PC. White and grey end caps included.

APPLICATION

The luminaire is suitable for rooms that require increased ingress protection (IP44) such as toilets and bathrooms in public facilities; schools, public offices; shopping malls, office buildings and industrial buildings.

MIRRA LED

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details


MIRRA LED 52/69/900mm

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
20	4000	1600	OPAL	52/69/900	F	>> 703171

MIRRA LED

GENERAL CARD

LUMINOUS INTENSITY DISTRIB. CURVE



MIRRA LED

По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231	Казань (843)206-01-48	Новокузнецк (3843)20-46-81	Смоленск (4812)29-41-54
Архангельск (8182)63-90-72	Калининград (4012)72-03-81	Новосибирск (383)227-86-73	Сочи (862)225-72-31
Астрахань (8512)99-46-04	Калуга (4842)92-23-67	Омск (3812)21-46-40	Ставрополь (8652)20-65-13
Барнаул (3852)73-04-60	Кемерово (3842)65-04-62	Орел (4862)44-53-42	Сургут (3462)77-98-35
Белгород (4722)40-23-64	Киров (8332)68-02-04	Оренбург (3532)37-68-04	Тверь (4822)63-31-35
Брянск (4832)59-03-52	Краснодар (861)203-40-90	Пенза (8412)22-31-16	Томск (3822)98-41-53
Владивосток (423)249-28-31	Красноярск (391)204-63-61	Пермь (342)205-81-47	Тула (4872)74-02-29
Волгоград (844)278-03-48	Курск (4712)77-13-04	Ростов-на-Дону (863)308-18-15	Тюмень (3452)66-21-18
Вологда (8172)26-41-59	Липецк (4742)52-20-81	Рязань (4912)46-61-64	Ульяновск (8422)24-23-59
Воронеж (473)204-51-73	Магнитогорск (3519)55-03-13	Самара (846)206-03-16	Уфа (347)229-48-12
Екатеринбург (343)384-55-89	Москва (495)268-04-70	Санкт-Петербург (812)309-46-40	Хабаровск (4212)92-98-04
Иваново (4932)77-34-06	Мурманск (8152)59-64-93	Саратов (845)249-38-78	Челябинск (351)202-03-61
Ижевск (3412)26-03-58	Набережные Челны (8552)20-53-41	Севастополь (8692)22-31-93	Череповец (8202)49-02-64
Иркутск (395)279-98-46	Нижний Новгород (831)429-08-12	Симферополь (3652)67-13-56	Ярославль (4852)69-52-93
Россия (495)268-04-70	Киргизия (996)312-96-26-47	Казахстан (7172)727-132	