

Системы световых линий

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Россия (495)268-04-70


Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Киргизия (996)312-96-26-47

Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Казахстан (7172)727-132

Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

BARIS 52 LED

GENERAL CARD

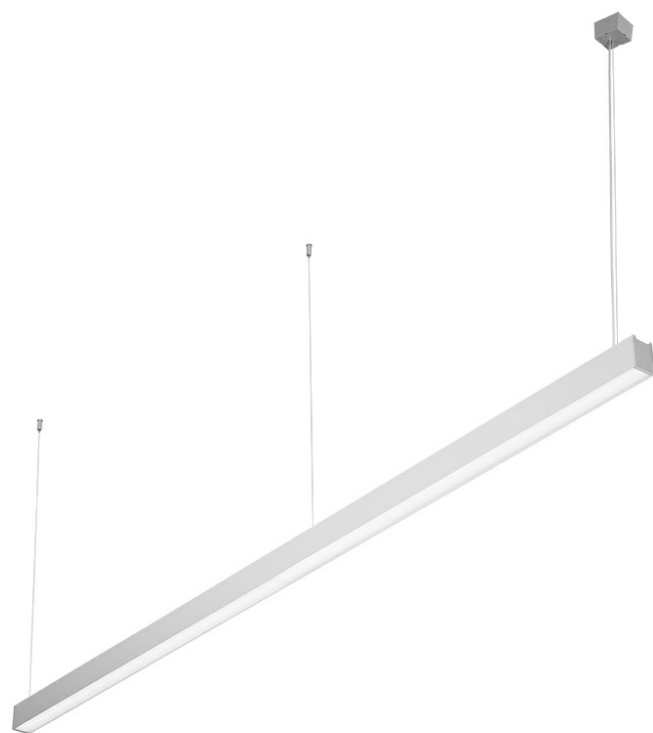

TECHNICAL PARAMETERS

Rated power of the luminaire [W]*:	14.00 - 84.00
Luminous flux [lm]*:	1800 - 9600
Colour temperature [K]:	4000
Energy efficiency class:	D; E; G
Material of the body:	aluminium
Colour of the body:	grey
Diffuser material:	PC
Diffuser type:	OPAL; PRM; UGR
Mounting version:	surface; suspended
Dimensions (H/W/T/S) [mm]:	69/52/1143-5623
Warranty [years]:	5

CHARACTERISTICS

Suspended or surface-mounted luminaire with classic proportions and modern design. The design of the luminaire allows you to create lines up to 6 meters long with no need to join the profile and up to 25 meters without diffuser joints. Straight connectors and luminous L, T, X-shaped bends allow you to create virtually unlimited sequences of straight lines, figures and patterns. The body of the luminaire consists of an anodised aluminium profile in grey or an aluminium profile painted in white or black (other colours available on request). Optical system in the form of a prismatic diffuser (PRM); of a dedicated, flexible opal diffuser that evenly illuminates the luminaire or with a raster that meets the stringent UGR <19 glare requirements. The luminaire's modularity and disassembly capabilities allow the replacement of electronic components such as the LED strip, power supply and the diffuser. The luminaire's profile is compatible with intelligent IOT modules, which also allows to optimise the provided level and amount of light, as well as the direct/indirect version that allows some of the light to be directed upwards to illuminate the ceiling.

APPLICATION

The luminaire is dedicated for indoor use. It is used as a main light source and is conducive to office work that requires eyesight concentration. Unique design, energy-saving LED modules and possible integration with external lighting control systems in the DALI standard make this luminaire suitable for use in modern A+ class office buildings, with particular emphasis on representative rooms, conference rooms, passageways and other places, where the IP44 class is required.

Attention: for surface mounted and suspended BARIS 52 LED luminaire (OPAL, PRM, UGR) it is necessary to order separately a diffuser (available as an accessory) with an appropriate length being the sum of all lines. Luminaire diffuser with a maximum length of 25m, available in 0.5m length increments, are cut to length by the contractor. Connectors (T, X, L) are fitted with OPAL diffuser. T, X, L connectors with diffusers UGR and PRM are available on request.

BARIS 52 LED

GENERAL CARD

AVAILABLE VERSIONS

 Click index >>, to see details

BARIS 52 LED OPAL

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Dimensions (H/W/T/S) [mm]	Mounting version	Index
16	4000	1900	OPAL	69/52/1143	suspended	>> 460005
19	4000	2200	OPAL	69/52/1283	suspended	>> 460012
21	4000	2400	OPAL	69/52/1423	suspended	>> 460029
23	4000	2700	OPAL	69/52/1563	suspended	>> 460036
24	4000	2900	OPAL	69/52/1703	suspended	>> 460043
27	4000	3200	OPAL	69/52/1843	suspended	>> 460050
29	4000	3400	OPAL	69/52/1983	suspended	>> 460067
31	4000	3700	OPAL	69/52/2123	suspended	>> 460074
32	4000	3800	OPAL	69/52/2263	suspended	>> 460081
35	4000	4100	OPAL	69/52/2403	suspended	>> 460098
38	4000	4400	OPAL	69/52/2543	suspended	>> 460104
39	4000	4600	OPAL	69/52/2683	suspended	>> 460111
42	4000	4800	OPAL	69/52/2823	suspended	>> 460128
44	4000	5100	OPAL	69/52/2963	suspended	>> 460135
46	4000	5400	OPAL	69/52/3103	suspended	>> 460142
47	4000	5600	OPAL	69/52/3243	suspended	>> 460159
48	4000	5700	OPAL	69/52/3383	suspended	>> 460166
51	4000	6000	OPAL	69/52/3523	suspended	>> 460173
54	4000	6300	OPAL	69/52/3663	suspended	>> 460180
57	4000	6600	OPAL	69/52/3803	suspended	>> 460197
59	4000	6800	OPAL	69/52/3943	suspended	>> 460203
61	4000	7000	OPAL	69/52/4083	suspended	>> 460210
63	4000	7200	OPAL	69/52/4223	suspended	>> 460227
65	4000	7500	OPAL	69/52/4363	suspended	>> 460234
67	4000	7800	OPAL	69/52/4503	suspended	>> 460241
69	4000	8100	OPAL	69/52/4643	suspended	>> 460258
70	4000	8200	OPAL	69/52/4783	suspended	>> 460265
71	4000	8400	OPAL	69/52/4923	suspended	>> 460272
75	4000	8800	OPAL	69/52/5063	suspended	>> 460289
76	4000	8900	OPAL	69/52/5203	suspended	>> 460296
80	4000	9200	OPAL	69/52/5343	suspended	>> 460302
82	4000	9400	OPAL	69/52/5483	suspended	>> 460319
84	4000	9600	OPAL	69/52/5623	suspended	>> 460326
16	4000	1900	OPAL	69/52/1143	surface	>> 460333

BARIS 52 LED

GENERAL CARD

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Dimensions (H/W/T/S) [mm]	Mounting version	Index
19	4000	2200	OPAL	69/52/1283	surface	>> 460340
21	4000	2400	OPAL	69/52/1423	surface	>> 460357
23	4000	2700	OPAL	69/52/1563	surface	>> 460364
24	4000	2900	OPAL	69/52/1703	surface	>> 460371
27	4000	3200	OPAL	69/52/1843	surface	>> 460388
29	4000	3400	OPAL	69/52/1983	surface	>> 460395
31	4000	3700	OPAL	69/52/2123	surface	>> 460401
32	4000	3800	OPAL	69/52/2263	surface	>> 460418
35	4000	4100	OPAL	69/52/2403	surface	>> 460425
38	4000	4400	OPAL	69/52/2543	surface	>> 460432
39	4000	4600	OPAL	69/52/2683	surface	>> 460449
42	4000	4800	OPAL	69/52/2823	surface	>> 460456
44	4000	5100	OPAL	69/52/2963	surface	>> 460463
46	4000	5400	OPAL	69/52/3103	surface	>> 460470
47	4000	5600	OPAL	69/52/3243	surface	>> 460487
48	4000	5700	OPAL	69/52/3383	surface	>> 460494
51	4000	6000	OPAL	69/52/3523	surface	>> 460500
54	4000	6300	OPAL	69/52/3663	surface	>> 460517
57	4000	6600	OPAL	69/52/3803	surface	>> 460524
59	4000	6800	OPAL	69/52/3943	surface	>> 460531
61	4000	7000	OPAL	69/52/4083	surface	>> 460548
63	4000	7200	OPAL	69/52/4223	surface	>> 460555
65	4000	7500	OPAL	69/52/4363	surface	>> 460562
67	4000	7800	OPAL	69/52/4503	surface	>> 460579
69	4000	8100	OPAL	69/52/4643	surface	>> 460586
70	4000	8200	OPAL	69/52/4783	surface	>> 460593
71	4000	8400	OPAL	69/52/4923	surface	>> 460609
75	4000	8800	OPAL	69/52/5063	surface	>> 460616
76	4000	8900	OPAL	69/52/5203	surface	>> 460623
80	4000	9200	OPAL	69/52/5343	surface	>> 460630
82	4000	9400	OPAL	69/52/5483	surface	>> 460647
84	4000	9600	OPAL	69/52/5623	surface	>> 460654

BARIS 52 LED PRM

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Dimensions (H/W/T/S) [mm]	Mounting version	Index
16	4000	1900	PRM	69/52/1143	suspended	>> 464003
19	4000	2200	PRM	69/52/1283	suspended	>> 464010
21	4000	2400	PRM	69/52/1423	suspended	>> 464027
23	4000	2700	PRM	69/52/1563	suspended	>> 464034

BARIS 52 LED

GENERAL CARD

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Dimensions (H/W/T/S) [mm]	Mounting version	Index
24	4000	2900	PRM	69/52/1703	suspended	>> 464041
27	4000	3200	PRM	69/52/1843	suspended	>> 464058
29	4000	3400	PRM	69/52/1983	suspended	>> 464065
31	4000	3700	PRM	69/52/2123	suspended	>> 464072
32	4000	3800	PRM	69/52/2263	suspended	>> 464089
35	4000	4100	PRM	69/52/2403	suspended	>> 464096
38	4000	4400	PRM	69/52/2543	suspended	>> 464102
39	4000	4600	PRM	69/52/2683	suspended	>> 464119
42	4000	4800	PRM	69/52/2823	suspended	>> 464126
44	4000	5100	PRM	69/52/2963	suspended	>> 464133
46	4000	5400	PRM	69/52/3103	suspended	>> 464140
47	4000	5600	PRM	69/52/3243	suspended	>> 464157
48	4000	5700	PRM	69/52/3383	suspended	>> 464164
51	4000	6000	PRM	69/52/3523	suspended	>> 464171
54	4000	6300	PRM	69/52/3663	suspended	>> 464188
57	4000	6600	PRM	69/52/3803	suspended	>> 464195
59	4000	6800	PRM	69/52/3943	suspended	>> 464201
61	4000	7000	PRM	69/52/4083	suspended	>> 464218
63	4000	7200	PRM	69/52/4223	suspended	>> 464225
65	4000	7500	PRM	69/52/4363	suspended	>> 464232
67	4000	7800	PRM	69/52/4503	suspended	>> 464249
69	4000	8100	PRM	69/52/4643	suspended	>> 464256
70	4000	8200	PRM	69/52/4783	suspended	>> 464263
71	4000	8400	PRM	69/52/4923	suspended	>> 464270
75	4000	8800	PRM	69/52/5063	suspended	>> 464287
76	4000	8900	PRM	69/52/5203	suspended	>> 464294
80	4000	9200	PRM	69/52/5343	suspended	>> 464300
82	4000	9400	PRM	69/52/5483	suspended	>> 464317
84	4000	9600	PRM	69/52/5623	suspended	>> 464324
16	4000	1900	PRM	69/52/1143	surface	>> 464331
19	4000	2200	PRM	69/52/1283	surface	>> 464348
21	4000	2400	PRM	69/52/1423	surface	>> 464355
23	4000	2700	PRM	69/52/1563	surface	>> 464362
24	4000	2900	PRM	69/52/1703	surface	>> 464379
27	4000	3200	PRM	69/52/1843	surface	>> 464386
29	4000	3400	PRM	69/52/1983	surface	>> 464393
31	4000	3700	PRM	69/52/2123	surface	>> 464409
32	4000	3800	PRM	69/52/2263	surface	>> 464416
35	4000	4100	PRM	69/52/2403	surface	>> 464423

BARIS 52 LED

GENERAL CARD

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Dimensions (H/W/T/S) [mm]	Mounting version	Index
38	4000	4400	PRM	69/52/2543	surface	>> 464430
39	4000	4600	PRM	69/52/2683	surface	>> 464447
42	4000	4800	PRM	69/52/2823	surface	>> 464454
44	4000	5100	PRM	69/52/2963	surface	>> 464461
46	4000	5400	PRM	69/52/3103	surface	>> 464478
47	4000	5600	PRM	69/52/3243	surface	>> 464485
48	4000	5700	PRM	69/52/3383	surface	>> 464492
51	4000	6000	PRM	69/52/3523	surface	>> 464508
54	4000	6300	PRM	69/52/3663	surface	>> 464515
57	4000	6600	PRM	69/52/3803	surface	>> 464522
59	4000	6800	PRM	69/52/3943	surface	>> 464539
61	4000	7000	PRM	69/52/4083	surface	>> 464546
63	4000	7200	PRM	69/52/4223	surface	>> 464553
65	4000	7500	PRM	69/52/4363	surface	>> 464560
67	4000	7800	PRM	69/52/4503	surface	>> 464577
69	4000	8100	PRM	69/52/4643	surface	>> 464584
70	4000	8200	PRM	69/52/4783	surface	>> 464591
71	4000	8400	PRM	69/52/4923	surface	>> 464607
75	4000	8800	PRM	69/52/5063	surface	>> 464614
76	4000	8900	PRM	69/52/5203	surface	>> 464621
80	4000	9200	PRM	69/52/5343	surface	>> 464638
82	4000	9400	PRM	69/52/5483	surface	>> 464645
84	4000	9600	PRM	69/52/5623	surface	>> 464652

BARIS 52 LED UGR

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Dimensions (H/W/T/S) [mm]	Mounting version	Index
14	4000	1800	UGR	69/52/1143	suspended	>> 460661
16	4000	2000	UGR	69/52/1283	suspended	>> 460678
18	4000	2300	UGR	69/52/1423	suspended	>> 460685
20	4000	2500	UGR	69/52/1563	suspended	>> 460692
21	4000	2700	UGR	69/52/1703	suspended	>> 460708
23	4000	2900	UGR	69/52/1843	suspended	>> 460715
25	4000	3200	UGR	69/52/1983	suspended	>> 460722
27	4000	3400	UGR	69/52/2123	suspended	>> 460739
28	4000	3600	UGR	69/52/2263	suspended	>> 460746
30	4000	3800	UGR	69/52/2403	suspended	>> 460753
32	4000	4000	UGR	69/52/2543	suspended	>> 460760
34	4000	4300	UGR	69/52/2683	suspended	>> 460777
36	4000	4600	UGR	69/52/2823	suspended	>> 460784

BARIS 52 LED

GENERAL CARD

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Dimensions (H/W/T/S) [mm]	Mounting version	Index
38	4000	4800	UGR	69/52/2963	suspended	>> 460791
40	4000	5000	UGR	69/52/3103	suspended	>> 460807
41	4000	5200	UGR	69/52/3243	suspended	>> 460814
42	4000	5400	UGR	69/52/3383	suspended	>> 460821
44	4000	5600	UGR	69/52/3523	suspended	>> 460838
46	4000	5800	UGR	69/52/3663	suspended	>> 460845
48	4000	6000	UGR	69/52/3803	suspended	>> 460852
50	4000	6300	UGR	69/52/3943	suspended	>> 460869
52	4000	6600	UGR	69/52/4083	suspended	>> 460876
54	4000	6900	UGR	69/52/4223	suspended	>> 460883
56	4000	7100	UGR	69/52/4363	suspended	>> 460890
58	4000	7300	UGR	69/52/4503	suspended	>> 460906
59	4000	7500	UGR	69/52/4643	suspended	>> 460913
60	4000	7600	UGR	69/52/4783	suspended	>> 460920
62	4000	7900	UGR	69/52/4923	suspended	>> 460937
64	4000	8000	UGR	69/52/5063	suspended	>> 460944
66	4000	8400	UGR	69/52/5203	suspended	>> 460951
68	4000	8600	UGR	69/52/5343	suspended	>> 460968
70	4000	8900	UGR	69/52/5483	suspended	>> 460975
72	4000	9200	UGR	69/52/5623	suspended	>> 460982
14	4000	1800	UGR	69/52/1143	surface	>> 460999
16	4000	2000	UGR	69/52/1283	surface	>> 461002
18	4000	2300	UGR	69/52/1423	surface	>> 461019
20	4000	2500	UGR	69/52/1563	surface	>> 461026
21	4000	2700	UGR	69/52/1703	surface	>> 461033
23	4000	2900	UGR	69/52/1843	surface	>> 461040
25	4000	3200	UGR	69/52/1983	surface	>> 461057
27	4000	3400	UGR	69/52/2123	surface	>> 461064
28	4000	3600	UGR	69/52/2263	surface	>> 461071
30	4000	3800	UGR	69/52/2403	surface	>> 461088
32	4000	4000	UGR	69/52/2543	surface	>> 461095
34	4000	4300	UGR	69/52/2683	surface	>> 461101
36	4000	4600	UGR	69/52/2823	surface	>> 461118
38	4000	4800	UGR	69/52/2963	surface	>> 461125
40	4000	5000	UGR	69/52/3103	surface	>> 461132
41	4000	5200	UGR	69/52/3243	surface	>> 461149
42	4000	5400	UGR	69/52/3383	surface	>> 461156
44	4000	5600	UGR	69/52/3523	surface	>> 461163
46	4000	5800	UGR	69/52/3663	surface	>> 461170

BARIS 52 LED

GENERAL CARD

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Dimensions (H/W/T/S) [mm]	Mounting version	Index
48	4000	6000	UGR	69/52/3803	surface	>> 461187
50	4000	6300	UGR	69/52/3943	surface	>> 461194
52	4000	6600	UGR	69/52/4083	surface	>> 461200
54	4000	6900	UGR	69/52/4223	surface	>> 461217
56	4000	7100	UGR	69/52/4363	surface	>> 461224
58	4000	7300	UGR	69/52/4503	surface	>> 461231
59	4000	7500	UGR	69/52/4643	surface	>> 461248
60	4000	7600	UGR	69/52/4783	surface	>> 461255
62	4000	7900	UGR	69/52/4923	surface	>> 461262
64	4000	8000	UGR	69/52/5063	surface	>> 461279
66	4000	8400	UGR	69/52/5203	surface	>> 461286
68	4000	8600	UGR	69/52/5343	surface	>> 461293
70	4000	8900	UGR	69/52/5483	surface	>> 461309
72	4000	9200	UGR	69/52/5623	surface	>> 461316

BARIS 52 LED

GENERAL CARD

ACCESSORIES AVAILABLE

index	Name
318023	Baris 52 - linear connector, straight
318030	Baris 52 - white power suspension
318047	Baris 52 - black power suspension
318054	Baris 52 - anodized power suspension
318061	Baris 52 - Dali white power suspension
318078	Baris 52 - Dali black power suspension
318085	Dali anodized power suspension
318092	Baris 52 – suspension
465000	Baris 52 diffuser PLX length of 1500mm (1,5m)
465017	Baris 52 diffuser PLX length of 2000mm (2,0m)
465024	Baris 52 diffuser PLX length of 2500mm (2,5m)
465031	Baris 52 diffuser PLX length of 3000mm (3,0m)
465048	Baris 52 diffuser PLX length of 3500mm (3,5m)
465055	Baris 52 diffuser PLX length of 4000mm (4,0m)
465062	Baris 52 diffuser PLX length of 4500mm (4,5m)
465079	Baris 52 diffuser PLX length of 5000mm (5,0m)
465086	Baris 52 diffuser PLX length of 5500mm (5,5m)
465093	Baris 52 diffuser PLX length of 6000mm (6,0m)
465109	Baris 52 diffuser PLX length of 6500mm (6,5m)
465116	Baris 52 diffuser PLX length of 7000mm (7,0m)
465123	Baris 52 diffuser PLX length of 7500mm (7,5m)
465130	Baris 52 diffuser PLX length of 8000mm (8,0m)
465147	Baris 52 diffuser PLX length of 8500mm (8,5m)
465154	Baris 52 diffuser PLX length of 9000mm (9,0m)
465161	Baris 52 diffuser PLX length of 9500mm (9,5m)
465178	Baris 52 diffuser PLX length of 10000mm (10,0m)
465185	Baris 52 diffuser PLX length of 10500mm (10,5m)
465192	Baris 52 diffuser PLX length of 11000mm (11,0m)
465208	Baris 52 diffuser PLX length of 11500mm (11,5m)
465215	Baris 52 diffuser PLX length of 12000mm (12,0m)
465222	Baris 52 diffuser PLX length of 12500mm (12,5m)
465239	Baris 52 diffuser PLX length of 13000mm (13,0m)
465246	Baris 52 diffuser PLX length of 13500mm (13,5m)
465253	Baris 52 diffuser PLX length of 14000mm (14,0m)
465260	Baris 52 diffuser PLX length of 14500mm (14,5m)
465277	Baris 52 diffuser PLX length of 15000mm (15,0m)
465284	Baris 52 diffuser PLX length of 15500mm (15,5m)

BARIS 52 LED

GENERAL CARD

465291	Baris 52 diffuser PLX length of 16000mm (16,0m)
465307	Baris 52 diffuser PLX length of 16500mm (16,5m)
465314	Baris 52 diffuser PLX length of 17000mm (17,0m)
465321	Baris 52 diffuser PLX length of 17500mm (17,5m)
465338	Baris 52 diffuser PLX length of 18000mm (18,0m)
465345	Baris 52 diffuser PLX length of 18500mm (18,5m)
465352	Baris 52 diffuser PLX length of 19000mm (19,0m)
465369	Baris 52 diffuser PLX length of 19500mm (19,5m)
465376	Baris 52 diffuser PLX length of 20000mm (20,0m)
465383	Baris 52 diffuser PLX length of 20500mm (20,5m)
465390	Baris 52 diffuser PLX length of 21000mm (21,0m)
465406	Baris 52 diffuser PLX length of 21500mm (21,5m)
465413	Baris 52 diffuser PLX length of 22000mm (22,0m)
465420	Baris 52 diffuser PLX length of 22500mm (22,5m)
465437	Baris 52 diffuser PLX length of 23000mm (23,0m)
465444	Baris 52 diffuser PLX length of 23500mm (23,5m)
465451	Baris 52 diffuser PLX length of 24000mm (24,0m)
465468	Baris 52 diffuser PLX length of 24500mm (24,5m)
465475	Baris 52 diffuser PLX length of 25000mm (25,0m)
465482	Baris 52 diffuser UGR length of 1500mm (1,5m)
465499	Baris 52 diffuser UGR length of 2000mm (2,0m)
465505	Baris 52 diffuser UGR length of 2500mm (2,5m)
465512	Baris 52 diffuser UGR length of 3000mm (3,0m)
465529	Baris 52 diffuser UGR length of 3500mm (3,5m)
465536	Baris 52 diffuser UGR length of 4000mm (4,0m)
465543	Baris 52 diffuser UGR length of 4500mm (4,5m)
465550	Baris 52 diffuser UGR length of 5000mm (5,0m)
465567	Baris 52 diffuser UGR length of 5500mm (5,5m)
465574	Baris 52 diffuser UGR length of 6000mm (6,0m)
465581	Baris 52 diffuser UGR length of 6500mm (6,5m)
465598	Baris 52 diffuser UGR length of 7000mm (7,0m)
465604	Baris 52 diffuser UGR length of 7500mm (7,5m)
465611	Baris 52 diffuser UGR length of 8000mm (8,0m)
465628	Baris 52 diffuser UGR length of 8500mm (8,5m)
465635	Baris 52 diffuser UGR length of 9000mm (9,0m)
465642	Baris 52 diffuser UGR length of 9500mm (9,5m)
465659	Baris 52 diffuser UGR length of 10000mm (10,0m)
465666	Baris 52 diffuser UGR length of 10500mm (10,5m)
465673	Baris 52 diffuser UGR length of 11000mm (11,0m)

BARIS 52 LED

GENERAL CARD

465680	Baris 52 diffuser UGR length of 11500mm (11,5m)
465697	Baris 52 diffuser UGR length of 12000mm (12,0m)
465703	Baris 52 diffuser UGR length of 12500mm (12,5m)
465710	Baris 52 diffuser UGR length of 13000mm (13,0m)
465727	Baris 52 diffuser UGR length of 13500mm (13,5m)
465734	Baris 52 diffuser UGR length of 14000mm (14,0m)
465741	Baris 52 diffuser UGR length of 14500mm (14,5m)
465758	Baris 52 diffuser UGR length of 15000mm (15,0m)
465765	Baris 52 diffuser UGR length of 15500mm (15,5m)
465772	Baris 52 diffuser UGR length of 16000mm (16,0m)
465789	Baris 52 diffuser UGR length of 16500mm (16,5m)
465796	Baris 52 diffuser UGR length of 17000mm (17,0m)
465802	Baris 52 diffuser UGR length of 17500mm (17,5m)
465819	Baris 52 diffuser UGR length of 18000mm (18,0m)
465826	Baris 52 diffuser UGR length of 18500mm (18,5m)
465833	Baris 52 diffuser UGR length of 19000mm (19,0m)
465840	Baris 52 diffuser UGR length of 19500mm (19,5m)
465857	Baris 52 diffuser UGR length of 20000mm (20,0m)
465864	Baris 52 diffuser UGR length of 20500mm (20,5m)
465871	Baris 52 diffuser UGR length of 21000mm (21,0m)
465888	Baris 52 diffuser UGR length of 21500mm (21,5m)
465895	Baris 52 diffuser UGR length of 22000mm (22,0m)
465901	Baris 52 diffuser UGR length of 22500mm (22,5m)
465918	Baris 52 diffuser UGR length of 23000mm (23,0m)
465925	Baris 52 diffuser UGR length of 23500mm (23,5m)
465932	Baris 52 diffuser UGR length of 24000mm (24,0m)
465949	Baris 52 diffuser UGR length of 24500mm (24,5m)
465956	Baris 52 diffuser UGR length of 25000mm (25,0m)
465963	Baris 52 diffuser PRM length of 1500mm (1,5m)
465970	Baris 52 diffuser PRM length of 2000mm (2,0m)
465987	Baris 52 diffuser PRM length of 2500mm (2,5m)
465994	Baris 52 diffuser PRM length of 3000mm (3,0m)
466007	Baris 52 diffuser PRM length of 3500mm (3,5m)
466014	Baris 52 diffuser PRM length of 4000mm (4,0m)
466021	Baris 52 diffuser PRM length of 4500mm (4,5m)
466038	Baris 52 diffuser PRM length of 5000mm (5,0m)
466045	Baris 52 diffuser PRM length of 5500mm (5,5m)
466052	Baris 52 diffuser PRM length of 6000mm (6,0m)
466069	Baris 52 diffuser PRM length of 6500mm (6,5m)

BARIS 52 LED

GENERAL CARD

466076	Baris 52 diffuser PRM length of 7000mm (7,0m)
466083	Baris 52 diffuser PRM length of 7500mm (7,5m)
466090	Baris 52 diffuser PRM length of 8000mm (8,0m)
466106	Baris 52 diffuser PRM length of 8500mm (8,5m)
466113	Baris 52 diffuser PRM length of 9000mm (9,0m)
466120	Baris 52 diffuser PRM length of 9500mm (9,5m)
466137	Baris 52 diffuser PRM length of 10000mm (10,0m)
466144	Baris 52 diffuser PRM length of 10500mm (10,5m)
466151	Baris 52 diffuser PRM length of 11000mm (11,0m)
466168	Baris 52 diffuser PRM length of 11500mm (11,5m)
466175	Baris 52 diffuser PRM length of 12000mm (12,0m)
466182	Baris 52 diffuser PRM length of 12500mm (12,5m)
466199	Baris 52 diffuser PRM length of 13000mm (13,0m)
466205	Baris 52 diffuser PRM length of 13500mm (13,5m)
466212	Baris 52 diffuser PRM length of 14000mm (14,0m)
466229	Baris 52 diffuser PRM length of 14500mm (14,5m)
466236	Baris 52 diffuser PRM length of 15000mm (15,0m)
466243	Baris 52 diffuser PRM length of 15500mm (15,5m)
466250	Baris 52 diffuser PRM length of 16000mm (16,0m)
466267	Baris 52 diffuser PRM length of 16500mm (16,5m)
466274	Baris 52 diffuser PRM length of 17000mm (17,0m)
466281	Baris 52 diffuser PRM length of 17500mm (17,5m)
466298	Baris 52 diffuser PRM length of 18000mm (18,0m)
466304	Baris 52 diffuser PRM length of 18500mm (18,5m)
466311	Baris 52 diffuser PRM length of 19000mm (19,0m)
466328	Baris 52 diffuser PRM length of 19500mm (19,5m)
466335	Baris 52 diffuser PRM length of 20000mm (20,0m)
466342	Baris 52 diffuser PRM length of 20500mm (20,5m)
466359	Baris 52 diffuser PRM length of 21000mm (21,0m)
466366	Baris 52 diffuser PRM length of 21500mm (21,5m)
466373	Baris 52 diffuser PRM length of 22000mm (22,0m)
466380	Baris 52 diffuser PRM length of 22500mm (22,5m)
466397	Baris 52 diffuser PRM length of 23000mm (23,0m)
466403	Baris 52 diffuser PRM length of 23500mm (23,5m)
466410	Baris 52 diffuser PRM length of 24000mm (24,0m)
466427	Baris 52 diffuser PRM length of 24500mm (24,5m)
466434	Baris 52 diffuser PRM length of 25000mm (25,0m)

BARIS 52 LED SINGLE

GENERAL CARD



TECHNICAL PARAMETERS

Ingress protection:	IP44
Impact resistance:	IK06
Rated power of the luminaire [W]*:	9.00 - 66.00
Luminous flux [lm]*:	850 - 6800
Colour temperature [K]:	3000; 4000
Material of the body:	aluminium
Colour of the body:	black; grey; white
Diffuser type:	OPAL; PRM; UGR
Mounting version:	surface; suspended
Dimensions (H/W/T/S) [mm]:	1143/69/52; 1423/69/52; 2263/69/52; 583/69/52
Warranty [years]:	5

CHARACTERISTICS

Suspended or surface-mounted luminaire with classic proportions and modern design. The housing of the luminaire is made of an anodized aluminum profile in gray or an aluminum profile painted in white or black (other colors available on request). The optical system is in the form of a prismatic diffuser (PRM); a dedicated, flexible opal diffuser evenly illuminating the luminaire or with a louver that meets the stringent glare requirements UGR <19 covered with a transparent cover. The modularity and dismantling of the luminaire allow for the replacement of electronic components, such as the LED strip, power supply, and replacement of the lampshade by qualified persons. The luminaire profile has been adapted to work with intelligent IoT modules, which will additionally optimize the level and amount of light provided by it, as well as the direct/indirect version that allows some of the light to be directed upwards, illuminating the ceiling. The luminaire is equipped with a unique suspension system that facilitates the installation of the luminaire and adjustment of the suspension. All Baris 52 LED Single suspended luminaires include 1.2m long pendants with a socket in the set and are equipped with a diffuser.

APPLICATION

The luminaire is intended for indoor use. It is used as the main light source and favors office work that requires concentrated vision. The unique design, the energy-saving LED modules, and the ability to work with external lighting control systems in the DALI standard predestine the luminaire for use in modern office buildings of class A+, with a particular focus on offices, prestigious rooms, conference rooms, passageways, and wherever IP44 protection is required.

Baris 52 LED Single is, as the name suggests, a single lighting element with a specific length. To create a line of length up to 6 meters without connecting the profile and up to 25 meters without connecting the lampshade, version BARIS 52 LED.

BARIS 52 LED SINGLE

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

Baris 52 LED Single OPAL

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	DIMM DALI	Colour of the body	Dimensions (H/W/T/S) [mm]	Mounting version	Index
9	3000	850	OPAL	yes	grey	583/69/52	surface	>> 469725
9	3000	850	OPAL		grey	583/69/52	surface	>> 469480
9	4000	900	OPAL	yes	grey	583/69/52	surface	>> 461866
9	4000	900	OPAL		grey	583/69/52	surface	>> 461743
9	4000	900	OPAL		white	583/69/52	surface	>> 461965
9	4000	900	OPAL		black	583/69/52	surface	>> 461927
9	3000	850	OPAL	yes	grey	583/69/52	suspended	>> 468766
9	3000	850	OPAL		grey	583/69/52	suspended	>> 468520
9	4000	900	OPAL	yes	grey	583/69/52	suspended	>> 461804
9	4000	900	OPAL		grey	583/69/52	suspended	>> 461682
16	3000	1400	OPAL	yes	grey	583/69/52	surface	>> 469756
16	3000	1400	OPAL		grey	583/69/52	surface	>> 469510
16	4000	1500	OPAL	yes	grey	583/69/52	surface	>> 461897
16	4000	1500	OPAL		grey	583/69/52	surface	>> 461774
16	3000	1400	OPAL	yes	grey	583/69/52	suspended	>> 468797
16	3000	1400	OPAL		grey	583/69/52	suspended	>> 468551
16	4000	1500	OPAL	yes	grey	583/69/52	suspended	>> 461835
16	4000	1500	OPAL		grey	583/69/52	suspended	>> 461712
18	3000	1800	OPAL	yes	grey	1143/69/52	surface	>> 469787
18	3000	1800	OPAL		grey	1143/69/52	surface	>> 469541
18	4000	1900	OPAL	yes	grey	1143/69/52	surface	>> 464942
18	4000	1900	OPAL		grey	1143/69/52	surface	>> 464829
18	4000	1900	OPAL		white	1143/69/52	surface	>> 461972
18	4000	1900	OPAL		black	1143/69/52	surface	>> 461934
18	3000	1800	OPAL	yes	grey	1143/69/52	suspended	>> 468827
18	3000	1800	OPAL		grey	1143/69/52	suspended	>> 468582
18	4000	1900	OPAL	yes	grey	1143/69/52	suspended	>> 464881
18	4000	1900	OPAL		grey	1143/69/52	suspended	>> 464768
22	3000	2250	OPAL	yes	grey	1423/69/52	surface	>> 469848
22	3000	2250	OPAL		grey	1423/69/52	surface	>> 469602
22	4000	2400	OPAL	yes	grey	1423/69/52	surface	>> 469183
22	4000	2400	OPAL		grey	1423/69/52	surface	>> 469060
22	4000	2400	OPAL		white	1423/69/52	surface	>> 461989

BARIS 52 LED SINGLE

GENERAL CARD

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	DIMM DALI	Colour of the body	Dimensions (H/W/T/S) [mm]	Mounting version	Index
22	4000	2400	OPAL		black	1423/69/52	surface	>> 461941
22	3000	2250	OPAL	yes	grey	1423/69/52	suspended	>> 468889
22	3000	2250	OPAL		grey	1423/69/52	suspended	>> 468643
22	4000	2400	OPAL	yes	grey	1423/69/52	suspended	>> 469121
22	4000	2400	OPAL		grey	1423/69/52	suspended	>> 469008
30	3000	2800	OPAL	yes	grey	1143/69/52	surface	>> 469817
30	3000	2800	OPAL		grey	1143/69/52	surface	>> 469572
30	4000	3000	OPAL	yes	grey	1143/69/52	surface	>> 464973
30	4000	3000	OPAL		grey	1143/69/52	surface	>> 464850
30	3000	2800	OPAL	yes	grey	1143/69/52	suspended	>> 468858
30	3000	2800	OPAL		grey	1143/69/52	suspended	>> 468612
30	4000	3000	OPAL	yes	grey	1143/69/52	suspended	>> 464911
30	4000	3000	OPAL		grey	1143/69/52	suspended	>> 464799
32	3000	3550	OPAL	yes	grey	2263/69/52	surface	>> 469909
32	3000	3550	OPAL		grey	2263/69/52	surface	>> 469664
32	4000	3800	OPAL	yes	grey	2263/69/52	surface	>> 469428
32	4000	3800	OPAL		grey	2263/69/52	surface	>> 469305
32	4000	3800	OPAL		white	2263/69/52	surface	>> 461996
32	4000	3800	OPAL		black	2263/69/52	surface	>> 461958
32	3000	3550	OPAL	yes	grey	2263/69/52	suspended	>> 468940
32	3000	3550	OPAL		grey	2263/69/52	suspended	>> 468704
32	4000	3800	OPAL	yes	grey	2263/69/52	suspended	>> 469367
32	4000	3800	OPAL		grey	2263/69/52	suspended	>> 469244
37	3000	3550	OPAL	yes	grey	1423/69/52	surface	>> 469879
37	3000	3550	OPAL		grey	1423/69/52	surface	>> 469633
37	4000	3800	OPAL	yes	grey	1423/69/52	surface	>> 469213
37	4000	3800	OPAL		grey	1423/69/52	surface	>> 469091
37	3000	3550	OPAL	yes	grey	1423/69/52	suspended	>> 468919
37	3000	3550	OPAL		grey	1423/69/52	suspended	>> 468674
37	4000	3800	OPAL	yes	grey	1423/69/52	suspended	>> 469152
37	4000	3800	OPAL		grey	1423/69/52	suspended	>> 469039
56	3000	5650	OPAL	yes	grey	2263/69/52	surface	>> 469930
56	3000	5650	OPAL		grey	2263/69/52	surface	>> 469695
56	4000	6000	OPAL	yes	grey	2263/69/52	surface	>> 469459
56	4000	6000	OPAL		grey	2263/69/52	surface	>> 469336
56	3000	5650	OPAL	yes	grey	2263/69/52	suspended	>> 468971
56	3000	5650	OPAL		grey	2263/69/52	suspended	>> 468735
56	4000	6000	OPAL	yes	grey	2263/69/52	suspended	>> 469398

BARIS 52 LED SINGLE

GENERAL CARD

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	DIMM DALI	Colour of the body	Dimensions (H/W/T/S) [mm]	Mounting version	Index
56	4000	6000	OPAL		grey	2263/69/52	suspended	>> 469275

Baris 52 LED Single PRM

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	DIMM DALI	Colour of the body	Dimensions (H/W/T/S) [mm]	Mounting version	Index
9	3000	850	PRM	yes	grey	583/69/52	surface	>> 469732
9	3000	850	PRM		grey	583/69/52	surface	>> 469497
9	4000	900	PRM	yes	grey	583/69/52	surface	>> 461873
9	4000	900	PRM		grey	583/69/52	surface	>> 461750
9	3000	850	PRM	yes	grey	583/69/52	suspended	>> 468773
9	3000	850	PRM		grey	583/69/52	suspended	>> 468537
9	4000	900	PRM	yes	grey	583/69/52	suspended	>> 461811
9	4000	900	PRM		grey	583/69/52	suspended	>> 461699
16	3000	1400	PRM	yes	grey	583/69/52	surface	>> 469763
16	3000	1400	PRM		grey	583/69/52	surface	>> 469527
16	4000	1500	PRM	yes	grey	583/69/52	surface	>> 461903
16	4000	1500	PRM		grey	583/69/52	surface	>> 461781
16	3000	1400	PRM	yes	grey	583/69/52	suspended	>> 468803
16	3000	1400	PRM		grey	583/69/52	suspended	>> 468568
16	4000	1500	PRM	yes	grey	583/69/52	suspended	>> 461842
16	4000	1500	PRM		grey	583/69/52	suspended	>> 461729
18	3000	1800	PRM	yes	grey	1143/69/52	surface	>> 469794
18	3000	1800	PRM		grey	1143/69/52	surface	>> 469558
18	4000	1900	PRM	yes	grey	1143/69/52	surface	>> 464959
18	4000	1900	PRM		grey	1143/69/52	surface	>> 464836
18	3000	1800	PRM	yes	grey	1143/69/52	suspended	>> 468834
18	4000	1900	PRM	yes	grey	1143/69/52	suspended	>> 464898
18	4000	1900	PRM		grey	1143/69/52	suspended	>> 464775
22	3000	2250	PRM	yes	grey	1423/69/52	surface	>> 469855
22	3000	2250	PRM		grey	1423/69/52	surface	>> 469619
22	4000	2400	PRM	yes	grey	1423/69/52	surface	>> 469190
22	4000	2400	PRM		grey	1423/69/52	surface	>> 469077
22	3000	2250	PRM	yes	grey	1423/69/52	suspended	>> 468896
22	3000	2250	PRM		grey	1423/69/52	suspended	>> 468650
22	4000	2400	PRM	yes	grey	1423/69/52	suspended	>> 469138
22	4000	2400	PRM		grey	1423/69/52	suspended	>> 469015
30	3000	2800	PRM	yes	grey	1143/69/52	surface	>> 469824
30	3000	2800	PRM		grey	1143/69/52	surface	>> 469589
30	4000	3000	PRM	yes	grey	1143/69/52	surface	>> 464980

BARIS 52 LED SINGLE

GENERAL CARD

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	DIMM DALI	Colour of the body	Dimensions (H/W/T/S) [mm]	Mounting version	Index
30	4000	3000	PRM		grey	1143/69/52	surface	>> 464867
30	3000	2800	PRM	yes	grey	1143/69/52	suspended	>> 468865
30	3000	2800	PRM		grey	1143/69/52	suspended	>> 468629
30	4000	3000	PRM	yes	grey	1143/69/52	suspended	>> 464928
30	4000	3000	PRM		grey	1143/69/52	suspended	>> 464805
32	3000	3550	PRM	yes	grey	2263/69/52	surface	>> 469916
32	3000	3550	PRM		grey	2263/69/52	surface	>> 469671
32	4000	3800	PRM	yes	grey	2263/69/52	surface	>> 469435
32	4000	3800	PRM		grey	2263/69/52	surface	>> 469312
32	3000	3550	PRM	yes	grey	2263/69/52	suspended	>> 468957
32	3000	3550	PRM		grey	2263/69/52	suspended	>> 468711
32	4000	3800	PRM	yes	grey	2263/69/52	suspended	>> 469374
32	4000	3800	PRM		grey	2263/69/52	suspended	>> 469251
37	3000	3550	PRM	yes	grey	1423/69/52	surface	>> 469886
37	3000	3550	PRM		grey	1423/69/52	surface	>> 469640
37	4000	3800	PRM	yes	grey	1423/69/52	surface	>> 469220
37	4000	3800	PRM		grey	1423/69/52	surface	>> 469107
37	3000	3550	PRM	yes	grey	1423/69/52	suspended	>> 468926
37	3000	3550	PRM		grey	1423/69/52	suspended	>> 468681
37	4000	3800	PRM	yes	grey	1423/69/52	suspended	>> 469169
37	4000	3800	PRM		grey	1423/69/52	suspended	>> 469046
56	3000	5650	PRM	yes	grey	2263/69/52	surface	>> 469947
56	3000	5650	PRM		grey	2263/69/52	surface	>> 469701
56	4000	6000	PRM	yes	grey	2263/69/52	surface	>> 469466
56	4000	6000	PRM		grey	2263/69/52	surface	>> 469343
56	3000	5650	PRM	yes	grey	2263/69/52	suspended	>> 468988
56	3000	5650	PRM		grey	2263/69/52	suspended	>> 468742
56	4000	6000	PRM	yes	grey	2263/69/52	suspended	>> 469404
56	4000	6000	PRM		grey	2263/69/52	suspended	>> 469282

Baris 52 LED Single UGR

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	DIMM DALI	Colour of the body	Dimensions (H/W/T/S) [mm]	Mounting version	Index
10	4000	1000	UGR	yes	grey	583/69/52	surface	>> 461880
10	4000	1000	UGR		grey	583/69/52	surface	>> 461767
10	3000	950	UGR	yes	grey	583/69/52	surface	>> 469749
10	3000	950	UGR		grey	583/69/52	surface	>> 469503
10	4000	1000	UGR	yes	grey	583/69/52	suspended	>> 461828
10	4000	1000	UGR		grey	583/69/52	suspended	>> 461705

BARIS 52 LED SINGLE

GENERAL CARD

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	DIMM DALI	Colour of the body	Dimensions (H/W/T/S) [mm]	Mounting version	Index
10	3000	950	UGR	yes	grey	583/69/52	suspended	>> 468780
10	3000	950	UGR		grey	583/69/52	suspended	>> 468544
18	3000	1600	UGR	yes	grey	583/69/52	surface	>> 469770
18	3000	1600	UGR		grey	583/69/52	surface	>> 469534
18	4000	1700	UGR	yes	grey	583/69/52	surface	>> 461910
18	4000	1700	UGR		grey	583/69/52	surface	>> 461798
18	3000	1600	UGR	yes	grey	583/69/52	suspended	>> 468810
18	3000	1600	UGR		grey	583/69/52	suspended	>> 468575
18	4000	1700	UGR	yes	grey	583/69/52	suspended	>> 461859
18	4000	1700	UGR		grey	583/69/52	suspended	>> 461736
20	3000	1900	UGR	yes	grey	1143/69/52	surface	>> 469800
20	3000	1900	UGR		grey	1143/69/52	surface	>> 469565
20	4000	2000	UGR	yes	grey	1143/69/52	surface	>> 464966
20	4000	2000	UGR		grey	1143/69/52	surface	>> 464843
20	3000	1900	UGR	yes	grey	1143/69/52	suspended	>> 468841
20	3000	1900	UGR		grey	1143/69/52	suspended	>> 468605
20	4000	2000	UGR	yes	grey	1143/69/52	suspended	>> 464904
20	4000	2000	UGR		grey	1143/69/52	suspended	>> 464782
25	3000	2400	UGR	yes	grey	1423/69/52	surface	>> 469862
25	3000	2400	UGR		grey	1423/69/52	surface	>> 469626
25	4000	2550	UGR	yes	grey	1423/69/52	surface	>> 469206
25	4000	2550	UGR		grey	1423/69/52	surface	>> 469084
25	3000	2400	UGR	yes	grey	1423/69/52	suspended	>> 468902
25	3000	2400	UGR		grey	1423/69/52	suspended	>> 468667
25	4000	2550	UGR	yes	grey	1423/69/52	suspended	>> 469145
25	4000	2550	UGR		grey	1423/69/52	suspended	>> 469022
34	3000	3200	UGR	yes	grey	1143/69/52	surface	>> 469831
34	3000	3200	UGR		grey	1143/69/52	surface	>> 469596
34	4000	3400	UGR	yes	grey	1143/69/52	surface	>> 464997
34	4000	3400	UGR		grey	1143/69/52	surface	>> 464874
34	3000	3200	UGR	yes	grey	1143/69/52	suspended	>> 468872
34	3000	3200	UGR		grey	1143/69/52	suspended	>> 468636
34	4000	3400	UGR	yes	grey	1143/69/52	suspended	>> 464935
34	4000	3400	UGR		grey	1143/69/52	suspended	>> 464812
37	3000	3750	UGR	yes	grey	2263/69/52	surface	>> 469923
37	3000	3750	UGR		grey	2263/69/52	surface	>> 469688
37	4000	4000	UGR	yes	grey	2263/69/52	surface	>> 469442
37	4000	4000	UGR		grey	2263/69/52	surface	>> 469329

BARIS 52 LED SINGLE

GENERAL CARD

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	DIMM DALI	Colour of the body	Dimensions (H/W/T/S) [mm]	Mounting version	Index
37	3000	3750	UGR	yes	grey	2263/69/52	suspended	>> 468964
37	3000	3750	UGR		grey	2263/69/52	suspended	>> 468728
37	4000	4000	UGR	yes	grey	2263/69/52	suspended	>> 469381
37	4000	4000	UGR		grey	2263/69/52	suspended	>> 469268
43	3000	4050	UGR	yes	grey	1423/69/52	surface	>> 469893
43	3000	4050	UGR		grey	1423/69/52	surface	>> 469657
43	4000	4300	UGR	yes	grey	1423/69/52	surface	>> 469237
43	4000	4300	UGR		grey	1423/69/52	surface	>> 469114
43	3000	4050	UGR	yes	grey	1423/69/52	suspended	>> 468933
43	3000	4050	UGR		grey	1423/69/52	suspended	>> 468698
43	4000	4300	UGR	yes	grey	1423/69/52	suspended	>> 469176
43	4000	4300	UGR		grey	1423/69/52	suspended	>> 469053
66	3000	6400	UGR	yes	grey	2263/69/52	surface	>> 469954
66	3000	6400	UGR		grey	2263/69/52	surface	>> 469718
66	4000	6800	UGR	yes	grey	2263/69/52	surface	>> 469473
66	4000	6800	UGR		grey	2263/69/52	surface	>> 469350
66	3000	6400	UGR	yes	grey	2263/69/52	suspended	>> 468995
66	3000	6400	UGR		grey	2263/69/52	suspended	>> 468759
66	4000	6800	UGR	yes	grey	2263/69/52	suspended	>> 469411
66	4000	6800	UGR		grey	2263/69/52	suspended	>> 469299

BARIS 52 LED P GK

GENERAL CARD



TECHNICAL PARAMETERS

Ingress protection:	IP44/20
Rated power of the luminaire [W]*:	9.00 - 64.00
Luminous flux [lm]*:	700 - 6900
Colour temperature [K]:	4000
Material of the body:	aluminium
Colour of the body:	black; grey; white
Diffuser material:	PC
Diffuser type:	OPAL; PRM; UGR
UGR:	<19
Mounting version:	flush-mounted in plasterboard ceilings
Dimensions (H/W/T/S) [mm]:	37/69/1145; 37/69/1425; 37/69/2265; 37/69/586
Warranty [years]:	5

CHARACTERISTICS

Recessed lighting luminaire of classic proportions and modern design intended for installation in plaster-cardboard ceilings. Luminaire construction allows for installation in ceilings with two-level cross grid without breaching main (top) profiles. It is possible due to appropriately selected height of the lamp profile, reduced to 37mm and separate box for the power supply, which can be placed next to the luminaire. The luminaire is offered in four lengths with the possibility to combine into a line with a constant flux ratio from the meter (system available on request). Luminaire body is made of anodized aluminum profile in grey or aluminum profile painted white or black (other colors available on request). The optical system is in the form of a dedicated, flexible opal diffuser uniformly illuminating the luminaire, with a PRM prismatic diffuser or with a louver meeting the stringent requirements regarding glare UGR<19. The luminaire comes with a complete mounting system for a quick and easy installation in plasterboard ceilings.

APPLICATION

The luminaire is dedicated for indoor use. It is applied as the source of the main light and conducive to office work requiring concentration of eyesight. Classic design, energy-saving LED modules and the possibility of cooperation with external lighting control systems in the DALI standard dedicate the lamp to be used in modern office buildings of the A+ class, with particular consideration of representative rooms, conference halls, passageways and everywhere, where a low glare and/or high IP44 sealing from below is required.

BARIS 52 LED P GK

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

BARIS 52 LED P GK 37/69/1145mm

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Colour of the body	Dimensions (H/W/T/S) [mm]	Index
15	4000	1400	UGR	grey	37/69/1145	>> 927270
15	4000	1400	UGR	white	37/69/1145	>> 927317
15	4000	1400	UGR	black	37/69/1145	>> 927355
16	4000	1700	OPAL	grey	37/69/1145	>> 927010
16	4000	1700	OPAL	white	37/69/1145	>> 927058
16	4000	1700	OPAL	black	37/69/1145	>> 927096
16	4000	1700	PRM	grey	37/69/1145	>> 927140
16	4000	1700	PRM	white	37/69/1145	>> 927188
16	4000	1700	PRM	black	37/69/1145	>> 927225
29	4000	2900	UGR	grey	37/69/1145	>> 927638
29	4000	2900	UGR	white	37/69/1145	>> 927676
29	4000	2900	UGR	black	37/69/1145	>> 927713
32	4000	3400	OPAL	grey	37/69/1145	>> 927393
32	4000	3400	OPAL	white	37/69/1145	>> 927430
32	4000	3400	OPAL	black	37/69/1145	>> 927478
32	4000	3400	PRM	grey	37/69/1145	>> 927515
32	4000	3400	PRM	white	37/69/1145	>> 927553
32	4000	3400	PRM	black	37/69/1145	>> 927591

BARIS 52 LED P GK 37/69/1425mm

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Colour of the body	Dimensions (H/W/T/S) [mm]	Index
19	4000	1900	UGR	grey	37/69/1425	>> 927287
19	4000	1900	UGR	white	37/69/1425	>> 927324
19	4000	1900	UGR	black	37/69/1425	>> 927362
21	4000	2200	OPAL	grey	37/69/1425	>> 927027
21	4000	2200	OPAL	white	37/69/1425	>> 927065
21	4000	2200	OPAL	black	37/69/1425	>> 927102
21	4000	2200	PRM	grey	37/69/1425	>> 927157
21	4000	2200	PRM	white	37/69/1425	>> 927195
21	4000	2200	PRM	black	37/69/1425	>> 927249
39	4000	3700	UGR	grey	37/69/1425	>> 927645
39	4000	3700	UGR	white	37/69/1425	>> 927683
39	4000	3700	UGR	black	37/69/1425	>> 927720
42	4000	4400	OPAL	grey	37/69/1425	>> 927409

BARIS 52 LED P GK

GENERAL CARD

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Colour of the body	Dimensions (H/W/T/S) [mm]	Index
42	4000	4400	OPAL	white	37/69/1425	>> 927447
42	4000	4400	OPAL	black	37/69/1425	>> 927485
42	4000	4400	PRM	grey	37/69/1425	>> 927522
42	4000	4400	PRM	white	37/69/1425	>> 927560
42	4000	4400	PRM	black	37/69/1425	>> 927607

BARIS 52 LED P GK 37/69/2265mm

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Colour of the body	Dimensions (H/W/T/S) [mm]	Index
29	4000	2900	UGR	grey	37/69/2265	>> 927294
29	4000	2900	UGR	white	37/69/2265	>> 927331
29	4000	2900	UGR	black	37/69/2265	>> 927379
32	4000	3400	OPAL	grey	37/69/2265	>> 927034
32	4000	3400	OPAL	white	37/69/2265	>> 927072
32	4000	3400	OPAL	black	37/69/2265	>> 927119
32	4000	3400	PRM	grey	37/69/2265	>> 927164
32	4000	3400	PRM	white	37/69/2265	>> 927201
32	4000	3400	PRM	black	37/69/2265	>> 927256
59	4000	5800	UGR	grey	37/69/2265	>> 927652
59	4000	5800	UGR	white	37/69/2265	>> 927690
59	4000	5800	UGR	black	37/69/2265	>> 927737
64	4000	6900	OPAL	grey	37/69/2265	>> 927416
64	4000	6900	OPAL	white	37/69/2265	>> 927454
64	4000	6900	OPAL	black	37/69/2265	>> 927492
64	4000	6900	PRM	grey	37/69/2265	>> 927539
64	4000	6900	PRM	white	37/69/2265	>> 927577
64	4000	6900	PRM	black	37/69/2265	>> 927614

BARIS 52 LED P GK 37/69/586mm

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Colour of the body	Dimensions (H/W/T/S) [mm]	Index
9	4000	700	UGR	grey	37/69/586	>> 927263
9	4000	700	UGR	white	37/69/586	>> 927300
9	4000	700	UGR	black	37/69/586	>> 927348
9	4000	800	OPAL	grey	37/69/586	>> 927003
9	4000	800	OPAL	white	37/69/586	>> 927041
9	4000	800	OPAL	black	37/69/586	>> 927089
9	4000	800	PRM	grey	37/69/586	>> 927133
9	4000	800	PRM	white	37/69/586	>> 927171
9	4000	800	PRM	black	37/69/586	>> 927218
17	4000	1400	UGR	grey	37/69/586	>> 927621
17	4000	1400	UGR	white	37/69/586	>> 927669

BARIS 52 LED P GK

GENERAL CARD

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Colour of the body	Dimensions (H/W/T/S) [mm]	Index
17	4000	1400	UGR	black	37/69/586	>> 927706
17	4000	1700	OPAL	grey	37/69/586	>> 927386
17	4000	1700	OPAL	white	37/69/586	>> 927423
17	4000	1700	OPAL	black	37/69/586	>> 927461
17	4000	1700	PRM	grey	37/69/586	>> 927508
17	4000	1700	PRM	white	37/69/586	>> 927546
17	4000	1700	PRM	black	37/69/586	>> 927584

BARIS 52 LED P SM

GENERAL CARD



TECHNICAL PARAMETERS

Ingress protection:	IP44/IP20
Impact resistance:	IK06
Rated power of the luminaire [W]*:	9.00 - 45.00
Luminous flux [lm]*:	850 - 4500
Colour temperature [K]:	3000; 4000
Material of the body:	aluminium
Colour of the body:	black; grey; white
Diffuser material:	PC
Diffuser type:	OPAL; PRM
Mounting version:	recessed
Dimensions (H/W/T/S) [mm]:	1193/69/60; 1793/69/60; 593/69/60
Warranty [years]:	5

CHARACTERISTICS

A recessed luminaire with classic proportions and modern design, intended for installation in modular ceilings. The luminaire is available in three lengths: 595mm, 1195mm, 1795mm. The housing of the luminaire is made of an anodized aluminum profile in gray or an aluminum profile painted in white or black (other colors available on request). The optical system is in the form of a dedicated, flexible opal diffuser that evenly illuminates the luminaire, with a PRM prismatic diffuser. The luminaire is equipped with a complete mounting system enabling quick and easy installation in modular ceilings.

APPLICATION

The luminaire is dedicated to indoor use. It is applied as the source of the main light and is conducive to office work requiring concentration of eyesight. Classic design, energy-saving LED modules, and the possibility of cooperation with external lighting control systems in the DALI standard dedicate the lamp to be used in modern office buildings of the A+ class, with particular consideration of representative rooms, conference halls, passageways.

BARIS 52 LED P SM

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

BARIS 52 LED P SM 1193/69/60mm

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Colour of the body	DIMM DALI	Dimensions (H/W/T/S) [mm]	Index
18	4000	1900	OPAL	grey		1193/69/60	>> 928246
18	4000	1900	PRM	grey		1193/69/60	>> 928253
18	4000	1900	OPAL	white		1193/69/60	>> 928284
18	4000	1900	PRM	white		1193/69/60	>> 928291
18	4000	1900	OPAL	black		1193/69/60	>> 928321
18	4000	1900	PRM	black		1193/69/60	>> 928338
18	4000	1900	OPAL	grey	yes	1193/69/60	>> 928369
18	4000	1900	PRM	grey	yes	1193/69/60	>> 928376
18	4000	1900	OPAL	white	yes	1193/69/60	>> 928406
18	4000	1900	PRM	white	yes	1193/69/60	>> 928413
18	4000	1900	OPAL	black	yes	1193/69/60	>> 928444
18	4000	1900	PRM	black	yes	1193/69/60	>> 928451
18	3000	1800	OPAL	grey		1193/69/60	>> 928963
18	3000	1800	PRM	grey		1193/69/60	>> 928970
18	3000	1800	OPAL	white		1193/69/60	>> 929007
18	3000	1800	PRM	white		1193/69/60	>> 929014
18	3000	1800	OPAL	black		1193/69/60	>> 929045
18	3000	1800	PRM	black		1193/69/60	>> 929052
18	3000	1800	OPAL	grey	yes	1193/69/60	>> 929083
18	3000	1800	PRM	grey	yes	1193/69/60	>> 929090
18	3000	1800	OPAL	white	yes	1193/69/60	>> 929120
18	3000	1800	PRM	white	yes	1193/69/60	>> 929137
18	3000	1800	OPAL	black	yes	1193/69/60	>> 929168
18	3000	1800	PRM	black	yes	1193/69/60	>> 929175
30	4000	3000	OPAL	grey		1193/69/60	>> 928260
30	4000	3000	PRM	grey		1193/69/60	>> 928277
30	4000	3000	OPAL	white		1193/69/60	>> 928307
30	4000	3000	PRM	white		1193/69/60	>> 928314
30	4000	3000	OPAL	black		1193/69/60	>> 928345
30	4000	3000	PRM	black		1193/69/60	>> 928352
30	4000	3000	OPAL	grey	yes	1193/69/60	>> 928383
30	4000	3000	PRM	grey	yes	1193/69/60	>> 928390
30	4000	3000	OPAL	white	yes	1193/69/60	>> 928420

BARIS 52 LED P SM

GENERAL CARD

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Colour of the body	DIMM DALI	Dimensions (H/W/T/S) [mm]	Index
30	4000	3000	PRM	white	yes	1193/69/60	>> 928437
30	4000	3000	OPAL	black	yes	1193/69/60	>> 928468
30	4000	3000	PRM	black	yes	1193/69/60	>> 928475
30	3000	2800	OPAL	grey		1193/69/60	>> 928987
30	3000	2800	PRM	grey		1193/69/60	>> 928994
30	3000	2800	OPAL	white		1193/69/60	>> 929021
30	3000	2800	PRM	white		1193/69/60	>> 929038
30	3000	2800	OPAL	black		1193/69/60	>> 929069
30	3000	2800	PRM	black		1193/69/60	>> 929076
30	3000	2800	OPAL	grey	yes	1193/69/60	>> 929106
30	3000	2800	PRM	grey	yes	1193/69/60	>> 929113
30	3000	2800	OPAL	white	yes	1193/69/60	>> 929144
30	3000	2800	PRM	white	yes	1193/69/60	>> 929151
30	3000	2800	OPAL	black	yes	1193/69/60	>> 929182
30	3000	2800	PRM	black	yes	1193/69/60	>> 929199

BARIS 52 LED P SM 1793/69/60mm

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Colour of the body	DIMM DALI	Dimensions (H/W/T/S) [mm]	Index
26	4000	2700	OPAL	grey		1793/69/60	>> 928482
26	4000	2700	PRM	grey		1793/69/60	>> 928499
26	4000	2700	OPAL	white		1793/69/60	>> 928529
26	4000	2700	PRM	white		1793/69/60	>> 928536
26	4000	2700	OPAL	black		1793/69/60	>> 928567
26	4000	2700	PRM	black		1793/69/60	>> 928574
26	4000	2700	OPAL	grey	yes	1793/69/60	>> 928604
26	4000	2700	PRM	grey	yes	1793/69/60	>> 928611
26	4000	2700	OPAL	white	yes	1793/69/60	>> 928642
26	4000	2700	PRM	white	yes	1793/69/60	>> 928659
26	4000	2700	OPAL	black	yes	1793/69/60	>> 928680
26	4000	2700	PRM	black	yes	1793/69/60	>> 928697
26	3000	2558	OPAL	grey		1793/69/60	>> 929205
26	3000	2558	PRM	grey		1793/69/60	>> 929212
26	3000	2558	OPAL	white		1793/69/60	>> 929243
26	3000	2558	PRM	white		1793/69/60	>> 929250
26	3000	2558	OPAL	black		1793/69/60	>> 929281
26	3000	2558	PRM	black		1793/69/60	>> 929298
26	3000	2558	OPAL	grey	yes	1793/69/60	>> 929328
26	3000	2558	PRM	grey	yes	1793/69/60	>> 929335

BARIS 52 LED P SM

GENERAL CARD

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Colour of the body	DIMM DALI	Dimensions (H/W/T/S) [mm]	Index
26	3000	2558	OPAL	white	yes	1793/69/60	>> 929366
26	3000	2558	PRM	white	yes	1793/69/60	>> 929373
26	3000	2558	OPAL	black	yes	1793/69/60	>> 929403
26	3000	2558	PRM	black	yes	1793/69/60	>> 929410
45	4000	4500	OPAL	grey		1793/69/60	>> 928505
45	4000	4500	PRM	grey		1793/69/60	>> 928512
45	4000	4500	OPAL	white		1793/69/60	>> 928543
45	4000	4500	PRM	white		1793/69/60	>> 928550
45	4000	4500	OPAL	black		1793/69/60	>> 928581
45	4000	4500	PRM	black		1793/69/60	>> 928598
45	4000	4500	OPAL	grey	yes	1793/69/60	>> 928628
45	4000	4500	PRM	grey	yes	1793/69/60	>> 928635
45	4000	4500	OPAL	white	yes	1793/69/60	>> 928666
45	4000	4500	PRM	white	yes	1793/69/60	>> 928673
45	4000	4500	OPAL	black	yes	1793/69/60	>> 928703
45	4000	4500	PRM	black	yes	1793/69/60	>> 928710
45	3000	4200	OPAL	grey		1793/69/60	>> 929229
45	3000	4200	PRM	grey		1793/69/60	>> 929236
45	3000	4200	OPAL	white		1793/69/60	>> 929267
45	3000	4200	PRM	white		1793/69/60	>> 929274
45	3000	4200	OPAL	black		1793/69/60	>> 929304
45	3000	4200	PRM	black		1793/69/60	>> 929311
45	3000	4200	OPAL	grey	yes	1793/69/60	>> 929342
45	3000	4200	PRM	grey	yes	1793/69/60	>> 929359
45	3000	4200	OPAL	white	yes	1793/69/60	>> 929380
45	3000	4200	PRM	white	yes	1793/69/60	>> 929397
45	3000	4200	OPAL	black	yes	1793/69/60	>> 929427
45	3000	4200	PRM	black	yes	1793/69/60	>> 929434

BARIS 52 LED P SM 593/69/60mm

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Colour of the body	DIMM DALI	Dimensions (H/W/T/S) [mm]	Index
9	4000	900	OPAL	grey		593/69/60	>> 928000
9	4000	900	PRM	grey		593/69/60	>> 928017
9	4000	900	OPAL	white		593/69/60	>> 928048
9	4000	900	PRM	white		593/69/60	>> 928055
9	4000	900	OPAL	black		593/69/60	>> 928086
9	4000	900	PRM	black		593/69/60	>> 928093
9	4000	900	OPAL	grey	yes	593/69/60	>> 928123

BARIS 52 LED P SM

GENERAL CARD

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Colour of the body	DIMM DALI	Dimensions (H/W/T/S) [mm]	Index
9	4000	900	PRM	grey	yes	593/69/60	>> 928130
9	4000	900	OPAL	white	yes	593/69/60	>> 928161
9	4000	900	PRM	white	yes	593/69/60	>> 928178
9	4000	900	OPAL	black	yes	593/69/60	>> 928208
9	4000	900	PRM	black	yes	593/69/60	>> 928215
9	3000	850	OPAL	grey		593/69/60	>> 928727
9	3000	850	PRM	grey		593/69/60	>> 928734
9	3000	850	OPAL	white		593/69/60	>> 928765
9	3000	850	PRM	white		593/69/60	>> 928772
9	3000	850	OPAL	black		593/69/60	>> 928802
9	3000	850	PRM	black		593/69/60	>> 928819
9	3000	850	OPAL	grey	yes	593/69/60	>> 928840
9	3000	850	PRM	grey	yes	593/69/60	>> 928857
9	3000	850	OPAL	white	yes	593/69/60	>> 928888
9	3000	850	PRM	white	yes	593/69/60	>> 928895
9	3000	850	OPAL	black	yes	593/69/60	>> 928925
9	3000	850	PRM	black	yes	593/69/60	>> 928932
16	4000	1500	OPAL	grey		593/69/60	>> 928024
16	4000	1500	PRM	grey		593/69/60	>> 928031
16	4000	1500	OPAL	white		593/69/60	>> 928062
16	4000	1500	PRM	white		593/69/60	>> 928079
16	4000	1500	OPAL	black		593/69/60	>> 928109
16	4000	1500	PRM	black		593/69/60	>> 928116
16	4000	1500	OPAL	grey	yes	593/69/60	>> 928147
16	4000	1500	PRM	grey	yes	593/69/60	>> 928154
16	4000	1500	OPAL	white	yes	593/69/60	>> 928185
16	4000	1500	PRM	white	yes	593/69/60	>> 928192
16	4000	1500	OPAL	black	yes	593/69/60	>> 928222
16	4000	1500	PRM	black	yes	593/69/60	>> 928239
16	3000	1400	OPAL	grey		593/69/60	>> 928741
16	3000	1400	PRM	grey		593/69/60	>> 928758
16	3000	1400	OPAL	white		593/69/60	>> 928789
16	3000	1400	PRM	white		593/69/60	>> 928796
16	3000	1400	OPAL	black		593/69/60	>> 928826
16	3000	1400	PRM	black		593/69/60	>> 928833
16	3000	1400	OPAL	grey	yes	593/69/60	>> 928864
16	3000	1400	PRM	grey	yes	593/69/60	>> 928871
16	3000	1400	OPAL	white	yes	593/69/60	>> 928901


BARIS 52 LED P SM

GENERAL CARD

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Colour of the body	DIMM DALI	Dimensions (H/W/T/S) [mm]	Index
16	3000	1400	PRM	white	yes	593/69/60	>> 928918
16	3000	1400	OPAL	black	yes	593/69/60	>> 928949
16	3000	1400	PRM	black	yes	593/69/60	>> 928956

BARIS 52 LED BRACKET

GENERAL CARD

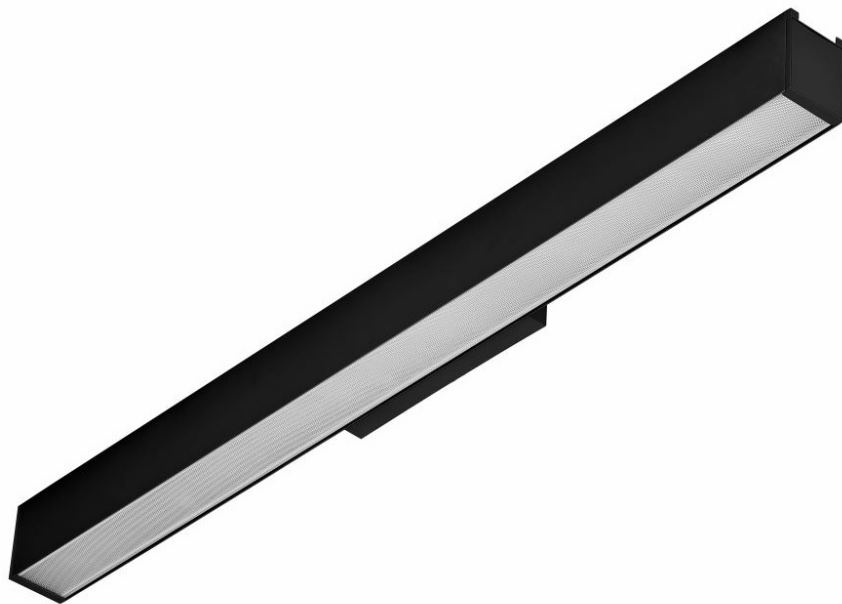

TECHNICAL PARAMETERS

Rated power [W] - range:	13, 26, 24/13
Luminous flux of the luminaire [lm] - range:	1300 - 2750, 2550/1500, 2750/1600
Colour temperature [K]:	3000; 4000
Ingress protection:	IP44
Impact resistance:	IK06
Material of the body:	aluminium
Colour of the body:	black; grey; white
Diffuser material:	PC
Diffuser type:	OPAL; PRM
Mounting version:	surface, wall mounted
Dimensions (H/W/T/S) [mm]:	82/69/864
Warranty [years]:	5

CHARACTERISTICS

Discreet elegance and energy efficiency are the special features of the BARIS 52 LED Bracket lamp family. The housing of the luminaire is made of an anodized aluminum profile in gray or an aluminum profile painted in white or black (other colors available on request). The supplement is a spacer made of plastic. The optical system is crowned with an opal diffuser providing soft light. The optical system in the form of a prismatic diaphragm reduces glare and is characterized by a greater light transmission than the opal cover, which has a direct impact on a higher value of luminous efficacy. The available DIR / IND versions provide up / down two-way light distribution in the proportions 65/35.

APPLICATION

A unique design predisposes these luminaires to be illuminated: passageways, sanitary rooms, and bathrooms, as well as living rooms and hotel rooms. The Baris 52 Bracket luminaires perfectly display light paintings, posters or other works hung on the walls.

BARIS 52 LED BRACKET

GENERAL CARD

AVAILABLE VERSIONS

 Click index >>, to see details

BARIS 52 LED BRACKET

Rated power [W] - range	Colour temperature [K]	Luminous flux of the luminaire [lm] - range	Diffuser type	Colour of the body	DIMM DALI	Dimensions (H/W/T/S) [mm]	Index
13	3000	1300	OPAL	grey	yes	82/69/864	>> 674136
13	3000	1300	OPAL	white	yes	82/69/864	>> 675263
13	3000	1300	OPAL	black	yes	82/69/864	>> 674907
13	3000	1300	PRM	grey	yes	82/69/864	>> 674143
13	3000	1300	PRM	white	yes	82/69/864	>> 675270
13	3000	1300	PRM	black	yes	82/69/864	>> 674914
13	3000	1300	OPAL	grey		82/69/864	>> 455896
13	3000	1300	OPAL	white		82/69/864	>> 675034
13	3000	1300	OPAL	black		82/69/864	>> 674679
13	3000	1300	PRM	grey		82/69/864	>> 455919
13	3000	1300	PRM	white		82/69/864	>> 675058
13	3000	1300	PRM	black		82/69/864	>> 674693
13	4000	1400	OPAL	grey	yes	82/69/864	>> 674112
13	4000	1400	OPAL	white	yes	82/69/864	>> 675249
13	4000	1400	OPAL	black	yes	82/69/864	>> 674884
13	4000	1400	PRM	grey	yes	82/69/864	>> 674129
13	4000	1400	PRM	white	yes	82/69/864	>> 675256
13	4000	1400	PRM	black	yes	82/69/864	>> 674891
13	4000	1400	OPAL	grey		82/69/864	>> 455889
13	4000	1400	OPAL	white		82/69/864	>> 675027
13	4000	1400	OPAL	black		82/69/864	>> 674662
13	4000	1400	PRM	grey		82/69/864	>> 455902
13	4000	1400	PRM	white		82/69/864	>> 675041
13	4000	1400	PRM	black		82/69/864	>> 674686
26	3000	2600	OPAL	grey	yes	82/69/864	>> 674198
26	3000	2600	OPAL	white	yes	82/69/864	>> 675324
26	3000	2600	OPAL	black	yes	82/69/864	>> 674969
26	3000	2600	PRM	grey	yes	82/69/864	>> 674204
26	3000	2600	PRM	white	yes	82/69/864	>> 675331
26	3000	2600	PRM	black	yes	82/69/864	>> 674976
26	3000	2600	OPAL	grey		82/69/864	>> 674174
26	3000	2600	OPAL	white		82/69/864	>> 675300
26	3000	2600	OPAL	black		82/69/864	>> 674945

BARIS 52 LED BRACKET

GENERAL CARD

Rated power [W] - range	Colour temperature [K]	Luminous flux of the luminaire [lm] - range	Diffuser type	Colour of the body	DIMM DALI	Dimensions (H/W/T/S) [mm]	Index
26	3000	2600	PRM	grey		82/69/864	>> 674181
26	3000	2600	PRM	white		82/69/864	>> 675317
26	3000	2600	PRM	black		82/69/864	>> 674952
26	4000	2750	OPAL	grey	yes	82/69/864	>> 674150
26	4000	2750	OPAL	white	yes	82/69/864	>> 675287
26	4000	2750	OPAL	black	yes	82/69/864	>> 674921
26	4000	2750	PRM	grey	yes	82/69/864	>> 674167
26	4000	2750	PRM	white	yes	82/69/864	>> 675294
26	4000	2750	PRM	black	yes	82/69/864	>> 674938
26	4000	2750	OPAL	grey		82/69/864	>> 455988
26	4000	2750	OPAL	white		82/69/864	>> 675126
26	4000	2750	OPAL	black		82/69/864	>> 674761
26	4000	2750	PRM	grey		82/69/864	>> 455926
26	4000	2750	PRM	white		82/69/864	>> 675065
26	4000	2750	PRM	black		82/69/864	>> 674709

BARIS 52 LED BRACKET DIR/IND 24/13W

Rated power [W] - range	Colour temperature [K]	Luminous flux of the luminaire [lm] - range	Diffuser type	Colour of the body	DIMM DALI	Dimensions (H/W/T/S) [mm]	Index
24/13	3000	2550/1500	OPAL	grey	yes	82/69/864	>> 674235
24/13	3000	2550/1500	OPAL	white	yes	82/69/864	>> 675362
24/13	3000	2550/1500	OPAL	black	yes	82/69/864	>> 674600
24/13	3000	2550/1500	PRM	grey	yes	82/69/864	>> 674242
24/13	3000	2550/1500	PRM	white	yes	82/69/864	>> 675379
24/13	3000	2550/1500	PRM	black	yes	82/69/864	>> 674617
24/13	3000	2550/1500	OPAL	grey		82/69/864	>> 674273
24/13	3000	2550/1500	OPAL	white		82/69/864	>> 675386
24/13	3000	2550/1500	OPAL	black		82/69/864	>> 674624
24/13	3000	2550/1500	PRM	grey		82/69/864	>> 674280
24/13	3000	2550/1500	PRM	white		82/69/864	>> 675393
24/13	3000	2550/1500	PRM	black		82/69/864	>> 674631
24/13	4000	2750/1600	OPAL	grey	yes	82/69/864	>> 674211
24/13	4000	2750/1600	OPAL	white	yes	82/69/864	>> 675348
24/13	4000	2750/1600	OPAL	black	yes	82/69/864	>> 674983
24/13	4000	2750/1600	PRM	grey	yes	82/69/864	>> 674228
24/13	4000	2750/1600	PRM	white	yes	82/69/864	>> 675355
24/13	4000	2750/1600	PRM	black	yes	82/69/864	>> 674990
24/13	4000	2750/1600	OPAL	grey		82/69/864	>> 455940
24/13	4000	2750/1600	OPAL	white		82/69/864	>> 675089

BARIS 52 LED BRACKET


GENERAL CARD

Rated power [W] - range	Colour temperature [K]	Luminous flux of the luminaire [lm] - range	Diffuser type	Colour of the body	DIMM DALI	Dimensions (H/W/T/S) [mm]	Index
24/13	4000	2750/1600	OPAL	black		82/69/864	>> 674723
24/13	4000	2750/1600	PRM	grey		82/69/864	>> 455933
24/13	4000	2750/1600	PRM	white		82/69/864	>> 675072
24/13	4000	2750/1600	PRM	black		82/69/864	>> 674716


BARIS 52 LED BRACKET

GENERAL CARD

LUMINOUS INTENSITY DISTRIB. CURVE



BARIS 52 LED KINKIET DIR/IND



BARIS 52 LED KINKIET DIR/IND

BARIS 52 LED CONNECTORS

GENERAL CARD



TECHNICAL PARAMETERS

Ingress protection:	IP20
Rated power of the luminaire [W]*:	17.00
Luminous flux [lm]*:	2100
Colour temperature [K]:	4000
Energy efficiency class:	D
Electrical protection class:	I
Colour rendering index:	>80
SDCM:	≤ 3
Diffuser material:	PC
Diffuser type:	OPAL
Material of the body:	aluminium
Colour of the body:	black; grey; white
Mounting version:	surface, suspended
Warranty [years]:	5

CHARACTERISTICS

The key feature of L, T, X connectors is that they are equipped with integrated electronics and a diffuser, thanks to which the profile route bends remain illuminated along the entire length. Body is made of anodized aluminium profile in grey or aluminium profile painted white or black (other colors available on request). The optical system is complemented by a dedicated, flexible opal cover that evenly illuminates the connector. There is no division into surface mounted and suspended versions, which make the solution more universal.

Connectors (T, X, L) are supplied with an OPAL diffuser.

Connectors T, X, L UGR, and PRM diffusers are available on request.

APPLICATION

BARIS 52 LED connectors in the shape of the letter L, T, X and straight connectors create extraordinary opportunities to configure the light line matched to the character and shape of the room, allowing you to create virtually unlimited straight sequences, figures and patterns.

BARIS 52 LED CONNECTORS

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

BARIS 52 LED CONNECTORS L

Rated power of the luminaire [W]*	Luminous flux [lm]*	Colour temperature [K]	Colour of the body	DIMM DALI	Dimensions (H/W/T/S) [mm]	Index
17	2100	4000	grey		560/560/69	>> 317712
17	2100	4000	white		560/560/69	>> 317743
17	2100	4000	black		560/560/69	>> 317774
17	2100	4000	grey	yes	560/560/69	>> 317804
17	2100	4000	white	yes	560/560/69	>> 317835
17	2100	4000	black	yes	560/560/69	>> 317866

BARIS 52 LED CONNECTORS T

Rated power of the luminaire [W]*	Luminous flux [lm]*	Colour temperature [K]	Colour of the body	DIMM DALI	Dimensions (H/W/T/S) [mm]	Index
17	2100	4000	grey		560/560/69	>> 317729
17	2100	4000	white		560/560/69	>> 317750
17	2100	4000	black		560/560/69	>> 317781
17	2100	4000	grey	yes	560/560/69	>> 317811
17	2100	4000	white	yes	560/560/69	>> 317842
17	2100	4000	black	yes	560/560/69	>> 317873

BARIS 52 LED CONNECTORS X

Rated power of the luminaire [W]*	Luminous flux [lm]*	Colour temperature [K]	Colour of the body	DIMM DALI	Dimensions (H/W/T/S) [mm]	Index
17	2100	4000	grey		560/560/69	>> 317736
17	2100	4000	white		560/560/69	>> 317767
17	2100	4000	black		560/560/69	>> 317798
17	2100	4000	grey	yes	560/560/69	>> 317828
17	2100	4000	white	yes	560/560/69	>> 317859
17	2100	4000	black	yes	560/560/69	>> 317880

BARIS 52 LED CONNECTORS


GENERAL CARD

ACCESSORIES AVAILABLE

index	Name
318023	Baris 52 - linear connector, straight

BARIS 40 LED

GENERAL CARD

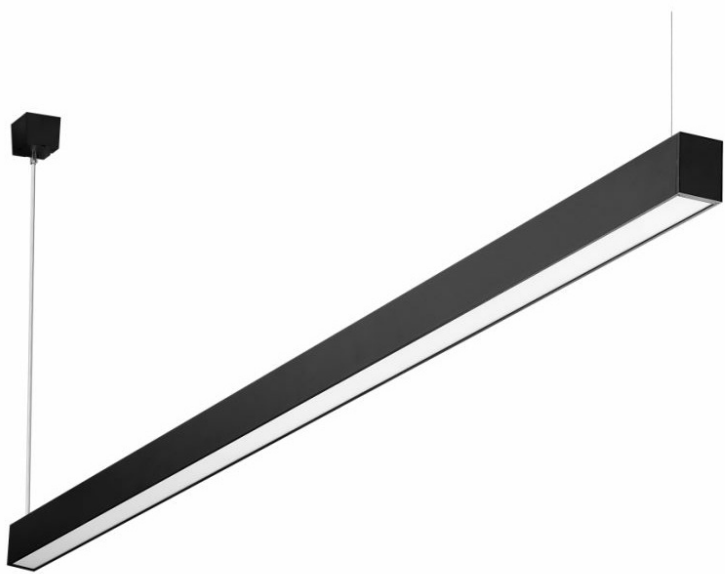

TECHNICAL PARAMETERS

Rated power of the luminaire [W]*:	14.00 - 50.00
Luminous flux [lm]*:	1300 - 5900
Colour temperature [K]:	3000; 4000
Ingress protection:	IP20; IP44
Impact resistance:	IK06
Material of the body:	aluminium
Colour of the body:	black; grey; white
Diffuser type:	OPAL; PRM
Mounting version:	surface; suspended
Dimensions (H/W/T/S) [mm]:	53/40/1140; 53/40/1421; 53/40/579; 53/40/860
Warranty [years]:	5

CHARACTERISTICS

Suspended or surface-mounted luminaire with a very narrow cross-section. The bodies are available as an anodised aluminium profile in grey or as an aluminium profile painted in white or black (other colours available on request). The optical system in the form of an opal cover. The optical system in the form of a prismatic diaphragm reduces glare and is characterized by a greater light transmittance than the opal diffuser, which has a direct impact on a higher value of luminous efficacy. The luminaire is equipped with a unique suspension system that facilitates mounting and adjustment of the suspension length. All BARIS 40 LED suspended luminaires to have 1.2m long slings in a set with a box.

APPLICATION

The luminaire is intended for indoor use. Especially recommended as a source of main lighting conducive to office work. Unique design, energy-saving LED modules and possible integration with external lighting control systems in the DALI standard make this luminaire suitable for use in modern A+ class office buildings, with particular emphasis on representative rooms. Wall lamps are intended, among others for use in corridors, passageways as well as sanitary rooms and bathrooms, where IP44 class is required

BARIS 40 LED

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

BARIS 40 LED surface

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Colour of the body	Dimensions (H/W/T/S) [mm]	Ingress protection	DIMM DALI	Mounting version	Index
14	3000	1300	OPAL	grey	53/40/860	IP20	yes	surface	>> 930140
14	3000	1300	OPAL	white	53/40/860	IP20	yes	surface	>> 930126
14	3000	1300	OPAL	black	53/40/860	IP20	yes	surface	>> 930133
14	3000	1300	OPAL	grey	53/40/860	IP20		surface	>> 925825
14	3000	1300	OPAL	white	53/40/860	IP20		surface	>> 925801
14	3000	1300	OPAL	black	53/40/860	IP20		surface	>> 925818
14	4000	1400	OPAL	grey	53/40/860	IP20	yes	surface	>> 925368
14	4000	1400	OPAL	white	53/40/860	IP20	yes	surface	>> 930089
14	4000	1400	OPAL	black	53/40/860	IP20	yes	surface	>> 930096
14	4000	1400	OPAL	grey	53/40/860	IP20		surface	>> 925511
14	4000	1400	OPAL	white	53/40/860	IP20		surface	>> 925498
14	4000	1400	OPAL	black	53/40/860	IP20		surface	>> 925504
14	3000	1450	PRM	grey	53/40/860	IP20	yes	surface	>> 930171
14	3000	1450	PRM	white	53/40/860	IP20	yes	surface	>> 930157
14	3000	1450	PRM	black	53/40/860	IP20	yes	surface	>> 930164
14	3000	1450	PRM	grey	53/40/860	IP20		surface	>> 925856
14	3000	1450	PRM	white	53/40/860	IP20		surface	>> 925832
14	3000	1450	PRM	black	53/40/860	IP20		surface	>> 925849
14	4000	1550	PRM	grey	53/40/860	IP20	yes	surface	>> 925399
14	4000	1550	PRM	white	53/40/860	IP20	yes	surface	>> 930102
14	4000	1550	PRM	black	53/40/860	IP20	yes	surface	>> 930119
14	4000	1550	PRM	grey	53/40/860	IP20		surface	>> 925603
14	4000	1550	PRM	white	53/40/860	IP20		surface	>> 925580
14	4000	1550	PRM	black	53/40/860	IP20		surface	>> 925597
16	3000	1300	OPAL	grey	53/40/579	IP20	yes	surface	>> 319136
16	3000	1300	OPAL	white	53/40/579	IP20	yes	surface	>> 319174
16	3000	1300	OPAL	black	53/40/579	IP20	yes	surface	>> 319211
16	3000	1300	OPAL	grey	53/40/579	IP20		surface	>> 319112
16	3000	1300	OPAL	white	53/40/579	IP20		surface	>> 319150
16	3000	1300	OPAL	black	53/40/579	IP20		surface	>> 319198
16	4000	1400	OPAL	grey	53/40/579	IP20	yes	surface	>> 319129
16	4000	1400	OPAL	white	53/40/579	IP20	yes	surface	>> 319167
16	4000	1400	OPAL	black	53/40/579	IP20	yes	surface	>> 319204

BARIS 40 LED

GENERAL CARD

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Colour of the body	Dimensions (H/W/T/S) [mm]	Ingress protection	DIMM DALI	Mounting version	Index
16	4000	1400	OPAL	grey	53/40/579	IP20		surface	>> 319105
16	4000	1400	OPAL	white	53/40/579	IP20		surface	>> 319143
16	4000	1400	OPAL	black	53/40/579	IP20		surface	>> 319181
16	3000	1600	PRM	grey	53/40/579	IP20	yes	surface	>> 455292
16	3000	1600	PRM	white	53/40/579	IP20	yes	surface	>> 455339
16	3000	1600	PRM	black	53/40/579	IP20	yes	surface	>> 455377
16	3000	1600	PRM	grey	53/40/579	IP20		surface	>> 455278
16	3000	1600	PRM	white	53/40/579	IP20		surface	>> 455315
16	3000	1600	PRM	black	53/40/579	IP20		surface	>> 455353
16	4000	1700	PRM	grey	53/40/579	IP20	yes	surface	>> 455285
16	4000	1700	PRM	white	53/40/579	IP20	yes	surface	>> 455322
16	4000	1700	PRM	black	53/40/579	IP20	yes	surface	>> 455360
16	4000	1700	PRM	grey	53/40/579	IP20		surface	>> 455261
16	4000	1700	PRM	white	53/40/579	IP20		surface	>> 455308
16	4000	1700	PRM	black	53/40/579	IP20		surface	>> 455346
18	3000	1700	OPAL	grey	53/40/1140	IP20		surface	>> 319297
18	3000	1700	OPAL	white	53/40/1140	IP20		surface	>> 319334
18	3000	1700	OPAL	black	53/40/1140	IP20		surface	>> 319372
18	4000	1850	OPAL	grey	53/40/1140	IP20		surface	>> 319280
18	4000	1850	OPAL	white	53/40/1140	IP20		surface	>> 319327
18	4000	1850	OPAL	black	53/40/1140	IP20		surface	>> 319365
18	3000	2100	PRM	grey	53/40/1140	IP20		surface	>> 454134
18	3000	2100	PRM	white	53/40/1140	IP20		surface	>> 454158
18	3000	2100	PRM	black	53/40/1140	IP20		surface	>> 454172
18	4000	2300	PRM	grey	53/40/1140	IP20		surface	>> 454127
18	4000	2300	PRM	white	53/40/1140	IP20		surface	>> 454141
18	4000	2300	PRM	black	53/40/1140	IP20		surface	>> 454165
23	3000	2100	OPAL	grey	53/40/860	IP20	yes	surface	>> 930249
23	3000	2100	OPAL	white	53/40/860	IP20	yes	surface	>> 930256
23	3000	2100	OPAL	black	53/40/860	IP20	yes	surface	>> 930263
23	3000	2100	OPAL	grey	53/40/860	IP20		surface	>> 925924
23	3000	2100	OPAL	white	53/40/860	IP20		surface	>> 925931
23	3000	2100	OPAL	black	53/40/860	IP20		surface	>> 925948
23	4000	2300	OPAL	grey	53/40/860	IP20	yes	surface	>> 925641
23	4000	2300	OPAL	white	53/40/860	IP20	yes	surface	>> 930041
23	4000	2300	OPAL	black	53/40/860	IP20	yes	surface	>> 930058
23	4000	2300	OPAL	grey	53/40/860	IP20		surface	>> 925146
23	4000	2300	OPAL	white	53/40/860	IP20		surface	>> 925153

BARIS 40 LED

GENERAL CARD

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Colour of the body	Dimensions (H/W/T/S) [mm]	Ingress protection	DIMM DALI	Mounting version	Index
23	4000	2300	OPAL	black	53/40/860	IP20		surface	>> 925160
23	3000	2350	PRM	grey	53/40/860	IP20	yes	surface	>> 930270
23	3000	2350	PRM	white	53/40/860	IP20	yes	surface	>> 930287
23	3000	2350	PRM	black	53/40/860	IP20	yes	surface	>> 930294
23	3000	2350	PRM	grey	53/40/860	IP20		surface	>> 925955
23	3000	2350	PRM	white	53/40/860	IP20		surface	>> 925962
23	3000	2350	PRM	black	53/40/860	IP20		surface	>> 925979
23	4000	2500	PRM	grey	53/40/860	IP20	yes	surface	>> 925672
23	4000	2500	PRM	white	53/40/860	IP20	yes	surface	>> 930065
23	4000	2500	PRM	black	53/40/860	IP20	yes	surface	>> 930072
23	4000	2500	PRM	grey	53/40/860	IP20		surface	>> 925245
23	4000	2500	PRM	white	53/40/860	IP20		surface	>> 925252
23	4000	2500	PRM	black	53/40/860	IP20		surface	>> 925269
33	3000	2600	OPAL	grey	53/40/1140	IP20		surface	>> 318382
33	3000	2600	OPAL	white	53/40/1140	IP20		surface	>> 318405
33	3000	2600	OPAL	black	53/40/1140	IP20		surface	>> 318429
33	4000	2800	OPAL	grey	53/40/1140	IP20		surface	>> 318375
33	4000	2800	OPAL	white	53/40/1140	IP20		surface	>> 318399
33	4000	2800	OPAL	black	53/40/1140	IP20		surface	>> 318412
33	3000	3200	PRM	grey	53/40/1140	IP20		surface	>> 454318
33	3000	3200	PRM	white	53/40/1140	IP20		surface	>> 454332
33	3000	3200	PRM	black	53/40/1140	IP20		surface	>> 454356
33	4000	3450	PRM	grey	53/40/1140	IP20		surface	>> 454301
33	4000	3450	PRM	white	53/40/1140	IP20		surface	>> 454325
33	4000	3450	PRM	black	53/40/1140	IP20		surface	>> 454349
39	3000	3400	OPAL	grey	53/40/1421	IP20		surface	>> 319655
39	3000	3400	OPAL	white	53/40/1421	IP20		surface	>> 319693
39	3000	3400	OPAL	black	53/40/1421	IP20		surface	>> 319730
39	4000	3700	OPAL	grey	53/40/1421	IP20		surface	>> 319648
39	4000	3700	OPAL	white	53/40/1421	IP20		surface	>> 319686
39	4000	3700	OPAL	black	53/40/1421	IP20		surface	>> 319723
39	3000	4200	PRM	grey	53/40/1421	IP20		surface	>> 454851
39	3000	4200	PRM	white	53/40/1421	IP20		surface	>> 454875
39	3000	4200	PRM	black	53/40/1421	IP20		surface	>> 454899
39	4000	4550	PRM	grey	53/40/1421	IP20		surface	>> 454844
39	4000	4550	PRM	white	53/40/1421	IP20		surface	>> 454868
39	4000	4550	PRM	black	53/40/1421	IP20		surface	>> 454882
39	3000	3600	OPAL	grey	53/40/860	IP20	yes	surface	>> 930188

BARIS 40 LED

GENERAL CARD

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Colour of the body	Dimensions (H/W/T/S) [mm]	Ingress protection	DIMM DALI	Mounting version	Index
39	3000	3600	OPAL	white	53/40/860	IP20	yes	surface	>> 930195
39	3000	3600	OPAL	black	53/40/860	IP20	yes	surface	>> 930201
39	3000	3600	OPAL	grey	53/40/860	IP20		surface	>> 925863
39	3000	3600	OPAL	white	53/40/860	IP20		surface	>> 925870
39	3000	3600	OPAL	black	53/40/860	IP20		surface	>> 925887
39	4000	3900	OPAL	grey	53/40/860	IP20	yes	surface	>> 925092
39	4000	3900	OPAL	white	53/40/860	IP20	yes	surface	>> 930003
39	4000	3900	OPAL	black	53/40/860	IP20	yes	surface	>> 930010
39	4000	3900	OPAL	grey	53/40/860	IP20		surface	>> 466809
39	4000	3900	OPAL	white	53/40/860	IP20		surface	>> 466816
39	4000	3900	OPAL	black	53/40/860	IP20		surface	>> 466823
39	3000	4150	PRM	grey	53/40/860	IP20	yes	surface	>> 930218
39	3000	4150	PRM	white	53/40/860	IP20	yes	surface	>> 930225
39	3000	4150	PRM	black	53/40/860	IP20	yes	surface	>> 930232
39	3000	4150	PRM	grey	53/40/860	IP20		surface	>> 925894
39	3000	4150	PRM	white	53/40/860	IP20		surface	>> 925900
39	3000	4150	PRM	black	53/40/860	IP20		surface	>> 925917
39	4000	4450	PRM	grey	53/40/860	IP20	yes	surface	>> 925610
39	4000	4450	PRM	white	53/40/860	IP20	yes	surface	>> 930027
39	4000	4450	PRM	black	53/40/860	IP20	yes	surface	>> 930034
39	4000	4450	PRM	grey	53/40/860	IP20		surface	>> 925009
39	4000	4450	PRM	white	53/40/860	IP20		surface	>> 925016
39	4000	4450	PRM	black	53/40/860	IP20		surface	>> 925023
46	3000	3900	OPAL	grey	53/40/1421	IP20	yes	surface	>> 319679
46	3000	3900	OPAL	white	53/40/1421	IP20	yes	surface	>> 319716
46	3000	3900	OPAL	black	53/40/1421	IP20	yes	surface	>> 319754
46	3000	3900	OPAL	grey	53/40/1421	IP20		surface	>> 318443
46	3000	3900	OPAL	white	53/40/1421	IP20		surface	>> 318467
46	3000	3900	OPAL	black	53/40/1421	IP20		surface	>> 318481
46	4000	4300	OPAL	grey	53/40/1421	IP20	yes	surface	>> 319662
46	4000	4300	OPAL	white	53/40/1421	IP20	yes	surface	>> 319709
46	4000	4300	OPAL	black	53/40/1421	IP20	yes	surface	>> 319747
46	4000	4300	OPAL	grey	53/40/1421	IP20		surface	>> 318436
46	4000	4300	OPAL	white	53/40/1421	IP20		surface	>> 318450
46	4000	4300	OPAL	black	53/40/1421	IP20		surface	>> 318474
46	3000	4800	PRM	grey	53/40/1421	IP20	yes	surface	>> 455179
46	3000	4800	PRM	white	53/40/1421	IP20	yes	surface	>> 455216
46	3000	4800	PRM	black	53/40/1421	IP20	yes	surface	>> 455254

BARIS 40 LED

GENERAL CARD

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Colour of the body	Dimensions (H/W/T/S) [mm]	Ingress protection	DIMM DALI	Mounting version	Index
46	3000	4800	PRM	grey	53/40/1421	IP20		surface	>> 455155
46	3000	4800	PRM	white	53/40/1421	IP20		surface	>> 455193
46	3000	4800	PRM	black	53/40/1421	IP20		surface	>> 455230
46	4000	5300	PRM	grey	53/40/1421	IP20	yes	surface	>> 455162
46	4000	5300	PRM	white	53/40/1421	IP20	yes	surface	>> 455209
46	4000	5300	PRM	black	53/40/1421	IP20	yes	surface	>> 455247
46	4000	5300	PRM	grey	53/40/1421	IP20		surface	>> 455148
46	4000	5300	PRM	white	53/40/1421	IP20		surface	>> 455186
46	4000	5300	PRM	black	53/40/1421	IP20		surface	>> 455223
50	3000	4450	OPAL	grey	53/40/1140	IP20	yes	surface	>> 319310
50	3000	4450	OPAL	white	53/40/1140	IP20	yes	surface	>> 319358
50	3000	4450	OPAL	black	53/40/1140	IP20	yes	surface	>> 319396
50	3000	4450	OPAL	grey	53/40/1140	IP20		surface	>> 318139
50	3000	4450	OPAL	white	53/40/1140	IP20		surface	>> 318153
50	3000	4450	OPAL	black	53/40/1140	IP20		surface	>> 318177
50	4000	4800	OPAL	grey	53/40/1140	IP20	yes	surface	>> 319303
50	4000	4800	OPAL	white	53/40/1140	IP20	yes	surface	>> 319341
50	4000	4800	OPAL	black	53/40/1140	IP20	yes	surface	>> 319389
50	4000	4800	OPAL	grey	53/40/1140	IP20		surface	>> 318122
50	4000	4800	OPAL	white	53/40/1140	IP20		surface	>> 318146
50	4000	4800	OPAL	black	53/40/1140	IP20		surface	>> 318160
50	3000	5500	PRM	grey	53/40/1140	IP20	yes	surface	>> 454639
50	3000	5500	PRM	white	53/40/1140	IP20	yes	surface	>> 454677
50	3000	5500	PRM	black	53/40/1140	IP20	yes	surface	>> 454714
50	3000	5500	PRM	grey	53/40/1140	IP20		surface	>> 454615
50	3000	5500	PRM	white	53/40/1140	IP20		surface	>> 454653
50	3000	5500	PRM	black	53/40/1140	IP20		surface	>> 454691
50	4000	5900	PRM	grey	53/40/1140	IP20	yes	surface	>> 454622
50	4000	5900	PRM	white	53/40/1140	IP20	yes	surface	>> 454660
50	4000	5900	PRM	black	53/40/1140	IP20	yes	surface	>> 454707
50	4000	5900	PRM	grey	53/40/1140	IP20		surface	>> 454608
50	4000	5900	PRM	white	53/40/1140	IP20		surface	>> 454646
50	4000	5900	PRM	black	53/40/1140	IP20		surface	>> 454684

BARIS 40 LED suspended

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Colour of the body	Dimensions (H/W/T/S) [mm]	Ingress protection	DIMM DALI	Mounting version	Index
14	3000	1300	OPAL	grey	53/40/860	IP20	yes	suspended	>> 930812
14	3000	1450	PRM	white	53/40/860	IP20	yes	suspended	>> 931147

BARIS 40 LED

GENERAL CARD

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Colour of the body	Dimensions (H/W/T/S) [mm]	Ingress protection	DIMM DALI	Mounting version	Index
14	3000	1300	OPAL	black	53/40/860	IP20	yes	suspended	>> 931154
14	3000	1300	OPAL	grey	53/40/860	IP20		suspended	>> 930874
14	3000	1450	PRM	white	53/40/860	IP20	yes	suspended	>> 930881
14	3000	1300	OPAL	black	53/40/860	IP20		suspended	>> 930898
14	4000	1400	OPAL	grey	53/40/860	IP20	yes	suspended	>> 925351
14	4000	1400	OPAL	white	53/40/860	IP20	yes	suspended	>> 930386
14	4000	1400	OPAL	black	53/40/860	IP20	yes	suspended	>> 930393
14	4000	1400	OPAL	grey	53/40/860	IP20		suspended	>> 925467
14	4000	1400	OPAL	white	53/40/860	IP20		suspended	>> 925474
14	4000	1400	OPAL	black	53/40/860	IP20		suspended	>> 925481
14	3000	1450	PRM	grey	53/40/860	IP20	yes	suspended	>> 930836
14	3000	1300	OPAL	white	53/40/860	IP20	yes	suspended	>> 931161
14	3000	1450	PRM	black	53/40/860	IP20	yes	suspended	>> 931178
14	3000	1450	PRM	grey	53/40/860	IP20		suspended	>> 930935
14	3000	1300	OPAL	white	53/40/860	IP20		suspended	>> 930942
14	3000	1450	PRM	black	53/40/860	IP20		suspended	>> 930959
14	4000	1550	PRM	grey	53/40/860	IP20	yes	suspended	>> 925382
14	4000	1550	PRM	white	53/40/860	IP20	yes	suspended	>> 930409
14	4000	1550	PRM	black	53/40/860	IP20	yes	suspended	>> 930416
14	4000	1550	PRM	grey	53/40/860	IP20		suspended	>> 925559
14	4000	1550	PRM	white	53/40/860	IP20		suspended	>> 925566
14	4000	1550	PRM	black	53/40/860	IP20		suspended	>> 925573
14	3000	1300	OPAL	grey	53/40/860	IP44	yes	suspended	>> 930805
14	3000	1300	OPAL	white	53/40/860	IP44	yes	suspended	>> 931260
14	3000	1300	OPAL	black	53/40/860	IP44	yes	suspended	>> 931277
14	3000	1300	OPAL	grey	53/40/860	IP44		suspended	>> 930843
14	3000	1300	OPAL	white	53/40/860	IP44		suspended	>> 930850
14	3000	1300	OPAL	black	53/40/860	IP44		suspended	>> 930867
14	4000	1400	OPAL	grey	53/40/860	IP44	yes	suspended	>> 925344
14	4000	1400	OPAL	white	53/40/860	IP44	yes	suspended	>> 930508
14	4000	1400	OPAL	black	53/40/860	IP44	yes	suspended	>> 930515
14	4000	1400	OPAL	grey	53/40/860	IP44		suspended	>> 925429
14	4000	1400	OPAL	white	53/40/860	IP44		suspended	>> 925436
14	4000	1400	OPAL	black	53/40/860	IP44		suspended	>> 925443
14	3000	1450	PRM	grey	53/40/860	IP44	yes	suspended	>> 930829
14	3000	1450	PRM	white	53/40/860	IP44	yes	suspended	>> 931284
14	3000	1450	PRM	black	53/40/860	IP44	yes	suspended	>> 931291
14	3000	1450	PRM	grey	53/40/860	IP44		suspended	>> 930904

BARIS 40 LED

GENERAL CARD

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Colour of the body	Dimensions (H/W/T/S) [mm]	Ingress protection	DIMM DALI	Mounting version	Index
14	3000	1450	PRM	white	53/40/860	IP44		suspended	>> 930911
14	3000	1450	PRM	black	53/40/860	IP44		suspended	>> 930928
14	4000	1550	PRM	grey	53/40/860	IP44	yes	suspended	>> 925375
14	4000	1550	PRM	white	53/40/860	IP44	yes	suspended	>> 930522
14	4000	1550	PRM	black	53/40/860	IP44	yes	suspended	>> 930539
14	4000	1550	PRM	grey	53/40/860	IP44		suspended	>> 925528
14	4000	1550	PRM	white	53/40/860	IP44		suspended	>> 925535
14	4000	1550	PRM	black	53/40/860	IP44		suspended	>> 925542
18	3000	1700	OPAL	grey	53/40/1140	IP20		suspended	>> 318573
18	3000	1700	OPAL	white	53/40/1140	IP20		suspended	>> 318610
18	3000	1700	OPAL	black	53/40/1140	IP20		suspended	>> 318658
18	4000	1850	OPAL	grey	53/40/1140	IP20		suspended	>> 318566
18	4000	1850	OPAL	white	53/40/1140	IP20		suspended	>> 318603
18	4000	1850	OPAL	black	53/40/1140	IP20		suspended	>> 318641
18	3000	2100	PRM	grey	53/40/1140	IP20		suspended	>> 454011
18	3000	2100	PRM	white	53/40/1140	IP20		suspended	>> 454035
18	3000	2100	PRM	black	53/40/1140	IP20		suspended	>> 454059
18	4000	2300	PRM	grey	53/40/1140	IP20		suspended	>> 454004
18	4000	2300	PRM	white	53/40/1140	IP20		suspended	>> 454028
18	4000	2300	PRM	black	53/40/1140	IP20		suspended	>> 454042
18	3000	1700	OPAL	grey	53/40/1140	IP44		suspended	>> 319471
18	3000	1700	OPAL	white	53/40/1140	IP44		suspended	>> 319518
18	3000	1700	OPAL	black	53/40/1140	IP44		suspended	>> 319556
18	4000	1850	OPAL	grey	53/40/1140	IP44		suspended	>> 319464
18	4000	1850	OPAL	white	53/40/1140	IP44		suspended	>> 319501
18	4000	1850	OPAL	black	53/40/1140	IP44		suspended	>> 319549
18	3000	2100	PRM	grey	53/40/1140	IP44		suspended	>> 454073
18	3000	2100	PRM	white	53/40/1140	IP44		suspended	>> 454097
18	3000	2100	PRM	black	53/40/1140	IP44		suspended	>> 454110
18	4000	2300	PRM	grey	53/40/1140	IP44		suspended	>> 454066
18	4000	2300	PRM	white	53/40/1140	IP44		suspended	>> 454080
18	4000	2300	PRM	black	53/40/1140	IP44		suspended	>> 454103
23	3000	2100	OPAL	grey	53/40/860	IP20	yes	suspended	>> 931024
23	3000	2100	OPAL	white	53/40/860	IP20	yes	suspended	>> 931109
23	3000	2100	OPAL	black	53/40/860	IP20	yes	suspended	>> 931116
23	3000	2100	OPAL	grey	53/40/860	IP20		suspended	>> 930683
23	3000	2100	OPAL	white	53/40/860	IP20		suspended	>> 930690
23	3000	2100	OPAL	black	53/40/860	IP20		suspended	>> 930706

BARIS 40 LED

GENERAL CARD

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Colour of the body	Dimensions (H/W/T/S) [mm]	Ingress protection	DIMM DALI	Mounting version	Index
23	4000	2300	OPAL	grey	53/40/860	IP20	yes	suspended	>> 925658
23	4000	2300	OPAL	white	53/40/860	IP20	yes	suspended	>> 930348
23	4000	2300	OPAL	black	53/40/860	IP20	yes	suspended	>> 930355
23	4000	2300	OPAL	grey	53/40/860	IP20		suspended	>> 925177
23	4000	2300	OPAL	white	53/40/860	IP20		suspended	>> 925184
23	4000	2300	OPAL	black	53/40/860	IP20		suspended	>> 925191
23	3000	2350	PRM	grey	53/40/860	IP20	yes	suspended	>> 931048
23	3000	2350	PRM	white	53/40/860	IP20	yes	suspended	>> 931123
23	3000	2350	PRM	black	53/40/860	IP20	yes	suspended	>> 931130
23	3000	2350	PRM	grey	53/40/860	IP20		suspended	>> 930744
23	3000	2350	PRM	white	53/40/860	IP20		suspended	>> 930751
23	3000	2350	PRM	black	53/40/860	IP20		suspended	>> 930768
23	4000	2500	PRM	grey	53/40/860	IP20	yes	suspended	>> 925689
23	4000	2500	PRM	white	53/40/860	IP20	yes	suspended	>> 930362
23	4000	2500	PRM	black	53/40/860	IP20	yes	suspended	>> 930379
23	4000	2500	PRM	grey	53/40/860	IP20		suspended	>> 925276
23	4000	2500	PRM	white	53/40/860	IP20		suspended	>> 925283
23	4000	2500	PRM	black	53/40/860	IP20		suspended	>> 925290
23	3000	2100	OPAL	grey	53/40/860	IP44	yes	suspended	>> 931031
23	3000	2100	OPAL	white	53/40/860	IP44	yes	suspended	>> 931222
23	3000	2100	OPAL	black	53/40/860	IP44	yes	suspended	>> 931239
23	3000	2100	OPAL	grey	53/40/860	IP44		suspended	>> 930713
23	3000	2100	OPAL	white	53/40/860	IP44		suspended	>> 930720
23	3000	2100	OPAL	black	53/40/860	IP44		suspended	>> 930737
23	4000	2300	OPAL	grey	53/40/860	IP44	yes	suspended	>> 925665
23	4000	2300	OPAL	white	53/40/860	IP44	yes	suspended	>> 930461
23	4000	2300	OPAL	black	53/40/860	IP44	yes	suspended	>> 930478
23	4000	2300	OPAL	grey	53/40/860	IP44		suspended	>> 925207
23	4000	2300	OPAL	white	53/40/860	IP44		suspended	>> 925214
23	4000	2300	OPAL	black	53/40/860	IP44		suspended	>> 925221
23	3000	2350	PRM	white	53/40/860	IP44	yes	suspended	>> 931246
23	3000	2350	PRM	black	53/40/860	IP44	yes	suspended	>> 931253
23	3000	2350	PRM	grey	53/40/860	IP44	yes	suspended	>> 931055
23	3000	2350	PRM	grey	53/40/860	IP44		suspended	>> 930799
23	3000	2350	PRM	white	53/40/860	IP44		suspended	>> 930775
23	3000	2350	PRM	black	53/40/860	IP44		suspended	>> 930782
23	4000	2500	PRM	grey	53/40/860	IP44	yes	suspended	>> 925696
23	4000	2500	PRM	white	53/40/860	IP44	yes	suspended	>> 930485

BARIS 40 LED

GENERAL CARD

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Colour of the body	Dimensions (H/W/T/S) [mm]	Ingress protection	DIMM DALI	Mounting version	Index
23	4000	2500	PRM	black	53/40/860	IP44	yes	suspended	>> 930492
23	4000	2500	PRM	grey	53/40/860	IP44		suspended	>> 925337
23	4000	2500	PRM	white	53/40/860	IP44		suspended	>> 925313
23	4000	2500	PRM	black	53/40/860	IP44		suspended	>> 925320
33	3000	2600	OPAL	grey	53/40/1140	IP20		suspended	>> 319594
33	3000	2600	OPAL	white	53/40/1140	IP20		suspended	>> 319617
33	3000	2600	OPAL	black	53/40/1140	IP20		suspended	>> 319631
33	4000	2800	OPAL	grey	53/40/1140	IP20		suspended	>> 319587
33	4000	2800	OPAL	white	53/40/1140	IP20		suspended	>> 319600
33	4000	2800	OPAL	black	53/40/1140	IP20		suspended	>> 319624
33	3000	3200	PRM	grey	53/40/1140	IP20		suspended	>> 454196
33	3000	3200	PRM	white	53/40/1140	IP20		suspended	>> 454219
33	3000	3200	PRM	black	53/40/1140	IP20		suspended	>> 454233
33	4000	3450	PRM	grey	53/40/1140	IP20		suspended	>> 454189
33	4000	3450	PRM	white	53/40/1140	IP20		suspended	>> 454202
33	4000	3450	PRM	black	53/40/1140	IP20		suspended	>> 454226
33	3000	2600	OPAL	grey	53/40/1140	IP44		suspended	>> 318320
33	3000	2600	OPAL	white	53/40/1140	IP44		suspended	>> 318344
33	3000	2600	OPAL	black	53/40/1140	IP44		suspended	>> 318368
33	4000	2800	OPAL	grey	53/40/1140	IP44		suspended	>> 318313
33	4000	2800	OPAL	white	53/40/1140	IP44		suspended	>> 318337
33	4000	2800	OPAL	black	53/40/1140	IP44		suspended	>> 318351
33	3000	3200	PRM	grey	53/40/1140	IP44		suspended	>> 454257
33	3000	3200	PRM	white	53/40/1140	IP44		suspended	>> 454271
33	3000	3200	PRM	black	53/40/1140	IP44		suspended	>> 454295
33	4000	3450	PRM	grey	53/40/1140	IP44		suspended	>> 454240
33	4000	3450	PRM	white	53/40/1140	IP44		suspended	>> 454264
33	4000	3450	PRM	black	53/40/1140	IP44		suspended	>> 454288
39	3000	3400	OPAL	grey	53/40/1421	IP20		suspended	>> 318757
39	3000	3400	OPAL	white	53/40/1421	IP20		suspended	>> 318795
39	3000	3400	OPAL	black	53/40/1421	IP20		suspended	>> 318832
39	4000	3700	OPAL	grey	53/40/1421	IP20		suspended	>> 318740
39	4000	3700	OPAL	white	53/40/1421	IP20		suspended	>> 318788
39	4000	3700	OPAL	black	53/40/1421	IP20		suspended	>> 318825
39	3000	4200	PRM	grey	53/40/1421	IP20		suspended	>> 454738
39	3000	4200	PRM	white	53/40/1421	IP20		suspended	>> 454752
39	3000	4200	PRM	black	53/40/1421	IP20		suspended	>> 454776
39	4000	4550	PRM	grey	53/40/1421	IP20		suspended	>> 454721

BARIS 40 LED

GENERAL CARD

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Colour of the body	Dimensions (H/W/T/S) [mm]	Ingress protection	DIMM DALI	Mounting version	Index
39	4000	4550	PRM	white	53/40/1421	IP20		suspended	>> 454745
39	4000	4550	PRM	black	53/40/1421	IP20		suspended	>> 454769
39	3000	3600	OPAL	grey	53/40/860	IP20	yes	suspended	>> 930669
39	3000	3600	OPAL	white	53/40/860	IP20	yes	suspended	>> 931062
39	3000	3600	OPAL	black	53/40/860	IP20	yes	suspended	>> 931079
39	3000	3600	OPAL	grey	53/40/860	IP20		suspended	>> 930546
39	3000	3600	OPAL	white	53/40/860	IP20		suspended	>> 930553
39	3000	3600	OPAL	black	53/40/860	IP20		suspended	>> 930560
39	4000	3900	OPAL	grey	53/40/860	IP20	yes	suspended	>> 925108
39	4000	3900	OPAL	white	53/40/860	IP20	yes	suspended	>> 930300
39	4000	3900	OPAL	black	53/40/860	IP20	yes	suspended	>> 930317
39	4000	3900	OPAL	grey	53/40/860	IP20		suspended	>> 466830
39	4000	3900	OPAL	white	53/40/860	IP20		suspended	>> 466847
39	4000	3900	OPAL	black	53/40/860	IP20		suspended	>> 466854
39	3000	4150	PRM	grey	53/40/860	IP20	yes	suspended	>> 931000
39	3000	4150	PRM	white	53/40/860	IP20	yes	suspended	>> 931086
39	3000	4150	PRM	black	53/40/860	IP20	yes	suspended	>> 931093
39	3000	4150	PRM	grey	53/40/860	IP20		suspended	>> 930607
39	3000	4150	PRM	white	53/40/860	IP20		suspended	>> 930614
39	3000	4150	PRM	black	53/40/860	IP20		suspended	>> 930621
39	4000	4450	PRM	grey	53/40/860	IP20	yes	suspended	>> 925627
39	4000	4450	PRM	white	53/40/860	IP20	yes	suspended	>> 930324
39	4000	4450	PRM	black	53/40/860	IP20	yes	suspended	>> 930331
39	4000	4450	PRM	grey	53/40/860	IP20		suspended	>> 925030
39	4000	4450	PRM	white	53/40/860	IP20		suspended	>> 925047
39	4000	4450	PRM	black	53/40/860	IP20		suspended	>> 925054
39	3000	3400	OPAL	grey	53/40/1421	IP44		suspended	>> 319839
39	3000	3400	OPAL	white	53/40/1421	IP44		suspended	>> 319877
39	3000	3400	OPAL	black	53/40/1421	IP44		suspended	>> 319914
39	4000	3700	OPAL	grey	53/40/1421	IP44		suspended	>> 319822
39	4000	3700	OPAL	white	53/40/1421	IP44		suspended	>> 319860
39	4000	3700	OPAL	black	53/40/1421	IP44		suspended	>> 319907
39	3000	4200	PRM	grey	53/40/1421	IP44		suspended	>> 454790
39	3000	4200	PRM	white	53/40/1421	IP44		suspended	>> 454813
39	3000	4200	PRM	black	53/40/1421	IP44		suspended	>> 454837
39	4000	4550	PRM	grey	53/40/1421	IP44		suspended	>> 454783
39	4000	4550	PRM	white	53/40/1421	IP44		suspended	>> 454806
39	4000	4550	PRM	black	53/40/1421	IP44		suspended	>> 454820

BARIS 40 LED

GENERAL CARD

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Colour of the body	Dimensions (H/W/T/S) [mm]	Ingress protection	DIMM DALI	Mounting version	Index
39	3000	3600	OPAL	grey	53/40/860	IP44	yes	suspended	>> 930676
39	3000	3600	OPAL	white	53/40/860	IP44	yes	suspended	>> 931185
39	3000	3600	OPAL	black	53/40/860	IP44	yes	suspended	>> 931192
39	3000	3600	OPAL	grey	53/40/860	IP44		suspended	>> 930577
39	3000	3600	OPAL	white	53/40/860	IP44		suspended	>> 930584
39	3000	3600	OPAL	black	53/40/860	IP44		suspended	>> 930591
39	4000	3900	OPAL	grey	53/40/860	IP44	yes	suspended	>> 925115
39	4000	3900	OPAL	white	53/40/860	IP44	yes	suspended	>> 930423
39	4000	3900	OPAL	black	53/40/860	IP44	yes	suspended	>> 930430
39	4000	3900	OPAL	grey	53/40/860	IP44		suspended	>> 466861
39	4000	3900	OPAL	white	53/40/860	IP44		suspended	>> 466878
39	4000	3900	OPAL	black	53/40/860	IP44		suspended	>> 466885
39	3000	4150	PRM	grey	53/40/860	IP44	yes	suspended	>> 931017
39	3000	4150	PRM	white	53/40/860	IP44	yes	suspended	>> 931208
39	3000	4150	PRM	black	53/40/860	IP44	yes	suspended	>> 931215
39	3000	4150	PRM	grey	53/40/860	IP44		suspended	>> 930638
39	3000	4150	PRM	white	53/40/860	IP44		suspended	>> 930645
39	3000	4150	PRM	black	53/40/860	IP44		suspended	>> 930652
39	4000	4450	PRM	grey	53/40/860	IP44	yes	suspended	>> 925634
39	4000	4450	PRM	white	53/40/860	IP44	yes	suspended	>> 930447
39	4000	4450	PRM	black	53/40/860	IP44	yes	suspended	>> 930454
39	4000	4450	PRM	grey	53/40/860	IP44		suspended	>> 925061
39	4000	4450	PRM	white	53/40/860	IP44		suspended	>> 925078
39	4000	4450	PRM	black	53/40/860	IP44		suspended	>> 925085
46	3000	3900	OPAL	grey	53/40/1421	IP20	yes	suspended	>> 318771
46	3000	3900	OPAL	white	53/40/1421	IP20	yes	suspended	>> 318818
46	3000	3900	OPAL	black	53/40/1421	IP20	yes	suspended	>> 318856
46	3000	3900	OPAL	grey	53/40/1421	IP20		suspended	>> 319952
46	3000	3900	OPAL	white	53/40/1421	IP20		suspended	>> 319976
46	3000	3900	OPAL	black	53/40/1421	IP20		suspended	>> 319990
46	4000	4300	OPAL	grey	53/40/1421	IP20	yes	suspended	>> 318764
46	4000	4300	OPAL	white	53/40/1421	IP20	yes	suspended	>> 318801
46	4000	4300	OPAL	black	53/40/1421	IP20	yes	suspended	>> 318849
46	4000	4300	OPAL	grey	53/40/1421	IP20		suspended	>> 319945
46	4000	4300	OPAL	white	53/40/1421	IP20		suspended	>> 319969
46	4000	4300	OPAL	black	53/40/1421	IP20		suspended	>> 319983
46	3000	4800	PRM	grey	53/40/1421	IP20	yes	suspended	>> 454936
46	3000	4800	PRM	white	53/40/1421	IP20	yes	suspended	>> 454974

BARIS 40 LED

GENERAL CARD

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Colour of the body	Dimensions (H/W/T/S) [mm]	Ingress protection	DIMM DALI	Mounting version	Index
46	3000	4800	PRM	black	53/40/1421	IP20	yes	suspended	>> 455018
46	3000	4800	PRM	grey	53/40/1421	IP20		suspended	>> 454912
46	3000	4800	PRM	white	53/40/1421	IP20		suspended	>> 454950
46	3000	4800	PRM	black	53/40/1421	IP20		suspended	>> 454998
46	4000	5300	PRM	grey	53/40/1421	IP20	yes	suspended	>> 454929
46	4000	5300	PRM	white	53/40/1421	IP20	yes	suspended	>> 454967
46	4000	5300	PRM	black	53/40/1421	IP20	yes	suspended	>> 455001
46	4000	5300	PRM	grey	53/40/1421	IP20		suspended	>> 454905
46	4000	5300	PRM	white	53/40/1421	IP20		suspended	>> 454943
46	4000	5300	PRM	black	53/40/1421	IP20		suspended	>> 454981
46	3000	3900	OPAL	grey	53/40/1421	IP44	yes	suspended	>> 319853
46	3000	3900	OPAL	white	53/40/1421	IP44	yes	suspended	>> 319891
46	3000	3900	OPAL	black	53/40/1421	IP44	yes	suspended	>> 319938
46	3000	3900	OPAL	grey	53/40/1421	IP44		suspended	>> 318504
46	3000	3900	OPAL	white	53/40/1421	IP44		suspended	>> 318528
46	3000	3900	OPAL	black	53/40/1421	IP44		suspended	>> 318542
46	4000	4300	OPAL	grey	53/40/1421	IP44	yes	suspended	>> 319846
46	4000	4300	OPAL	white	53/40/1421	IP44	yes	suspended	>> 319884
46	4000	4300	OPAL	black	53/40/1421	IP44	yes	suspended	>> 319921
46	4000	4300	OPAL	grey	53/40/1421	IP44		suspended	>> 318498
46	4000	4300	OPAL	white	53/40/1421	IP44		suspended	>> 318511
46	4000	4300	OPAL	black	53/40/1421	IP44		suspended	>> 318535
46	3000	4800	PRM	grey	53/40/1421	IP44	yes	suspended	>> 455056
46	3000	4800	PRM	white	53/40/1421	IP44	yes	suspended	>> 455094
46	3000	4800	PRM	black	53/40/1421	IP44	yes	suspended	>> 455131
46	3000	4800	PRM	grey	53/40/1421	IP44		suspended	>> 455032
46	3000	4800	PRM	white	53/40/1421	IP44		suspended	>> 455070
46	3000	4800	PRM	black	53/40/1421	IP44		suspended	>> 455117
46	4000	5300	PRM	grey	53/40/1421	IP44	yes	suspended	>> 455049
46	4000	5300	PRM	white	53/40/1421	IP44	yes	suspended	>> 455087
46	4000	5300	PRM	black	53/40/1421	IP44	yes	suspended	>> 455124
46	4000	5300	PRM	grey	53/40/1421	IP44		suspended	>> 455025
46	4000	5300	PRM	white	53/40/1421	IP44		suspended	>> 455063
46	4000	5300	PRM	black	53/40/1421	IP44		suspended	>> 455100
50	3000	4450	OPAL	grey	53/40/1140	IP20	yes	suspended	>> 318597
50	3000	4450	OPAL	white	53/40/1140	IP20	yes	suspended	>> 318634
50	3000	4450	OPAL	black	53/40/1140	IP20	yes	suspended	>> 318672
50	3000	4450	OPAL	grey	53/40/1140	IP20		suspended	>> 318269

BARIS 40 LED

GENERAL CARD

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Colour of the body	Dimensions (H/W/T/S) [mm]	Ingress protection	DIMM DALI	Mounting version	Index
50	3000	4450	OPAL	white	53/40/1140	IP20		suspended	>> 318283
50	3000	4450	OPAL	black	53/40/1140	IP20		suspended	>> 318306
50	4000	4800	OPAL	grey	53/40/1140	IP20	yes	suspended	>> 318580
50	4000	4800	OPAL	white	53/40/1140	IP20	yes	suspended	>> 318627
50	4000	4800	OPAL	black	53/40/1140	IP20	yes	suspended	>> 318665
50	4000	4800	OPAL	grey	53/40/1140	IP20		suspended	>> 318252
50	4000	4800	OPAL	white	53/40/1140	IP20		suspended	>> 318276
50	4000	4800	OPAL	black	53/40/1140	IP20		suspended	>> 318290
50	3000	5500	PRM	grey	53/40/1140	IP20	yes	suspended	>> 454394
50	3000	5500	PRM	white	53/40/1140	IP20	yes	suspended	>> 454431
50	3000	5500	PRM	black	53/40/1140	IP20	yes	suspended	>> 454479
50	3000	5500	PRM	grey	53/40/1140	IP20		suspended	>> 454370
50	3000	5500	PRM	white	53/40/1140	IP20		suspended	>> 454417
50	3000	5500	PRM	black	53/40/1140	IP20		suspended	>> 454455
50	4000	5900	PRM	grey	53/40/1140	IP20	yes	suspended	>> 454387
50	4000	5900	PRM	white	53/40/1140	IP20	yes	suspended	>> 454424
50	4000	5900	PRM	black	53/40/1140	IP20	yes	suspended	>> 454462
50	4000	5900	PRM	grey	53/40/1140	IP20		suspended	>> 454363
50	4000	5900	PRM	white	53/40/1140	IP20		suspended	>> 454400
50	4000	5900	PRM	black	53/40/1140	IP20		suspended	>> 454448
50	3000	4450	OPAL	grey	53/40/1140	IP44	yes	suspended	>> 319495
50	3000	4450	OPAL	white	53/40/1140	IP44	yes	suspended	>> 319532
50	3000	4450	OPAL	black	53/40/1140	IP44	yes	suspended	>> 319570
50	3000	4450	OPAL	grey	53/40/1140	IP44		suspended	>> 318191
50	3000	4450	OPAL	white	53/40/1140	IP44		suspended	>> 318221
50	3000	4450	OPAL	black	53/40/1140	IP44		suspended	>> 318245
50	4000	4800	OPAL	grey	53/40/1140	IP44	yes	suspended	>> 319488
50	4000	4800	OPAL	white	53/40/1140	IP44	yes	suspended	>> 319525
50	4000	4800	OPAL	black	53/40/1140	IP44	yes	suspended	>> 319563
50	4000	4800	OPAL	grey	53/40/1140	IP44		suspended	>> 318184
50	4000	4800	OPAL	white	53/40/1140	IP44		suspended	>> 318207
50	4000	4800	OPAL	black	53/40/1140	IP44		suspended	>> 318238
50	3000	5500	PRM	grey	53/40/1140	IP44	yes	suspended	>> 454516
50	3000	5500	PRM	white	53/40/1140	IP44	yes	suspended	>> 454554
50	3000	5500	PRM	black	53/40/1140	IP44	yes	suspended	>> 454592
50	3000	5500	PRM	grey	53/40/1140	IP44		suspended	>> 454493
50	3000	5500	PRM	white	53/40/1140	IP44		suspended	>> 454530
50	3000	5500	PRM	black	53/40/1140	IP44		suspended	>> 454578


BARIS 40 LED

GENERAL CARD

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Colour of the body	Dimensions (H/W/T/S) [mm]	Ingress protection	DIMM DALI	Mounting version	Index
50	4000	5900	PRM	grey	53/40/1140	IP44	yes	suspended	>> 454509
50	4000	5900	PRM	white	53/40/1140	IP44	yes	suspended	>> 454547
50	4000	5900	PRM	black	53/40/1140	IP44	yes	suspended	>> 454585
50	4000	5900	PRM	grey	53/40/1140	IP44		suspended	>> 454486
50	4000	5900	PRM	white	53/40/1140	IP44		suspended	>> 454523
50	4000	5900	PRM	black	53/40/1140	IP44		suspended	>> 454561

BARIS 40 LED UGR

GENERAL CARD

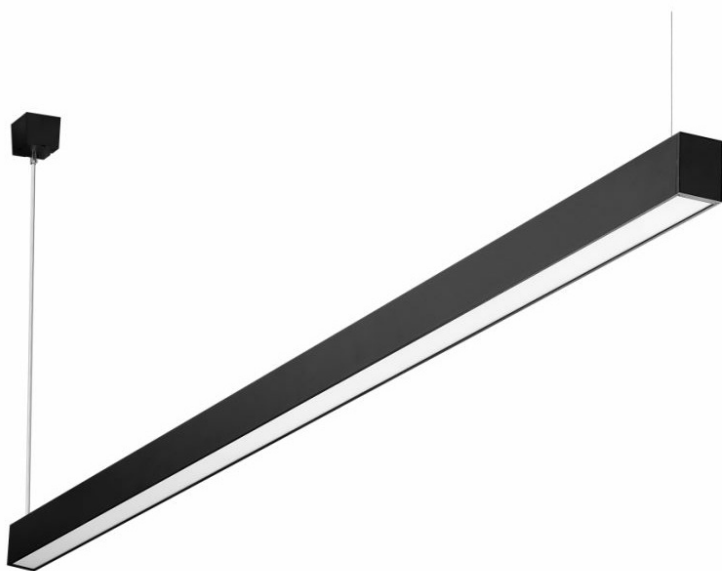

TECHNICAL PARAMETERS

Rated power of the luminaire [W]*:	19.00 - 44.00
Luminous flux [lm]*:	2200 - 5100
Colour temperature [K]:	3000; 4000
Ingress protection:	IP20; IP44
UGR:	15.6 - 17.6 - <19
Energy efficiency class:	D; E
Material of the body:	aluminium
Colour of the body:	black; grey; white
Diffuser type:	transparent
Diffuser material:	PMMA
Mounting version:	surface; suspended
Dimensions (H/W/T/S) [mm]:	53/40/1140; 53/40/1421
Warranty [years]:	5

CHARACTERISTICS

Luminaires BARIS 40 LED UGR was created to provide maximum comfort and efficiency. A UGR (Unified Glare Rating) of less than 19 minimizes the effect of glare affecting well-being, reducing fatigue and fewer mistakes. Suspended or surface-mounted luminaire with a very narrow cross-section. The bodies are available as an anodised aluminium profile in grey or as an aluminium profile painted in white or black (other colours available on request). Optical system in the form of an opal cover. The luminaire is equipped with a unique suspension system that facilitates mounting and adjustment of the suspension length. All BARIS 40 LED suspended luminaires have 1.2m long slings in a set with a box.

APPLICATION

The luminaire is intended for indoor use. Especially recommended as a source of main lighting conducive to office work. Unique design, energy-saving LED modules and possible integration with external lighting control systems in the DALI standard make this luminaire suitable for use in modern A+ class office buildings, with particular emphasis on representative rooms.

BARIS 40 LED UGR

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

BARIS 40 LED UGR surface

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Colour of the body	DIMM DALI	Ingress protection	Energy efficiency class	Mounting version	Dimensions (H/W/T/S) [mm]	Index
19	3000	2200	grey		IP20	D	surface	53/40/1140	>> 459139
19	3000	2200	white		IP20	D	surface	53/40/1140	>> 459153
19	3000	2200	black		IP20	D	surface	53/40/1140	>> 459177
19	4000	2400	grey		IP20	D	surface	53/40/1140	>> 459122
19	4000	2400	white		IP20	D	surface	53/40/1140	>> 459146
19	4000	2400	black		IP20	D	surface	53/40/1140	>> 459160
27	3000	3000	grey	yes	IP20	E	surface	53/40/1140	>> 459450
27	3000	3000	white	yes	IP20	E	surface	53/40/1140	>> 459498
27	3000	3000	black	yes	IP20	E	surface	53/40/1140	>> 459535
27	3000	3000	grey		IP20	E	surface	53/40/1140	>> 459436
27	3000	3000	white		IP20	E	surface	53/40/1140	>> 459474
27	3000	3000	black		IP20	E	surface	53/40/1140	>> 459511
27	4000	3300	grey	yes	IP20	D	surface	53/40/1140	>> 459443
27	4000	3300	white	yes	IP20	D	surface	53/40/1140	>> 459481
27	4000	3300	black	yes	IP20	D	surface	53/40/1140	>> 459528
27	4000	3300	grey		IP20	D	surface	53/40/1140	>> 459429
27	4000	3300	white		IP20	D	surface	53/40/1140	>> 459467
27	4000	3300	black		IP20	D	surface	53/40/1140	>> 459504
34	3000	3900	grey		IP20	E	surface	53/40/1421	>> 459672
34	3000	3900	white		IP20	E	surface	53/40/1421	>> 459696
34	3000	3900	black		IP20	E	surface	53/40/1421	>> 459719
34	4000	4200	grey		IP20	D	surface	53/40/1421	>> 459665
34	4000	4200	white		IP20	D	surface	53/40/1421	>> 459689
34	4000	4200	black		IP20	D	surface	53/40/1421	>> 459702
44	3000	4700	grey	yes	IP20	E	surface	53/40/1421	>> 459993
44	3000	4700	white	yes	IP20	E	surface	53/40/1421	>> 458958
44	3000	4700	black	yes	IP20	E	surface	53/40/1421	>> 458996
44	3000	4700	grey		IP20	E	surface	53/40/1421	>> 459979
44	3000	4700	white		IP20	E	surface	53/40/1421	>> 458934
44	3000	4700	black		IP20	E	surface	53/40/1421	>> 458972
44	4000	5100	grey	yes	IP20	D	surface	53/40/1421	>> 459986
44	4000	5100	white	yes	IP20	D	surface	53/40/1421	>> 458941
44	4000	5100	black	yes	IP20	D	surface	53/40/1421	>> 458989

BARIS 40 LED UGR

GENERAL CARD

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Colour of the body	DIMM DALI	Ingress protection	Energy efficiency class	Mounting version	Dimensions (H/W/T/S) [mm]	Index
44	4000	5100	grey		IP20	D	surface	53/40/1421	>> 459962
44	4000	5100	white		IP20	D	surface	53/40/1421	>> 458927
44	4000	5100	black		IP20	D	surface	53/40/1421	>> 458965

BARIS 40 LED UGR suspended

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Colour of the body	DIMM DALI	Ingress protection	Energy efficiency class	Mounting version	Dimensions (H/W/T/S) [mm]	Index
19	3000	2200	black		IP20	D	suspended	53/40/1140	>> 459054
19	3000	2200	grey		IP20	D	suspended	53/40/1140	>> 459016
19	3000	2200	white		IP20	D	suspended	53/40/1140	>> 459030
19	3000	2200	grey		IP44	D	suspended	53/40/1140	>> 459078
19	3000	2200	white		IP44	D	suspended	53/40/1140	>> 459092
19	3000	2200	black		IP44	D	suspended	53/40/1140	>> 459115
19	4000	2400	grey		IP20	D	suspended	53/40/1140	>> 459009
19	4000	2400	white		IP20	D	suspended	53/40/1140	>> 459023
19	4000	2400	black		IP20	D	suspended	53/40/1140	>> 459047
19	4000	2400	grey		IP44	D	suspended	53/40/1140	>> 459061
19	4000	2400	white		IP44	D	suspended	53/40/1140	>> 459085
19	4000	2400	black		IP44	D	suspended	53/40/1140	>> 459108
27	3000	3000	grey	yes	IP20	E	suspended	53/40/1140	>> 459214
27	3000	3000	white	yes	IP20	E	suspended	53/40/1140	>> 459252
27	3000	3000	black	yes	IP20	E	suspended	53/40/1140	>> 459290
27	3000	3000	grey	yes	IP44	E	suspended	53/40/1140	>> 459337
27	3000	3000	white	yes	IP44	E	suspended	53/40/1140	>> 459375
27	3000	3000	black	yes	IP44	E	suspended	53/40/1140	>> 459412
27	3000	3000	grey		IP20	E	suspended	53/40/1140	>> 459191
27	3000	3000	white		IP20	E	suspended	53/40/1140	>> 459238
27	3000	3000	black		IP20	E	suspended	53/40/1140	>> 459276
27	3000	3000	grey		IP44	E	suspended	53/40/1140	>> 459313
27	3000	3000	white		IP44	E	suspended	53/40/1140	>> 459351
27	3000	3000	black		IP44	E	suspended	53/40/1140	>> 459399
27	4000	3300	grey	yes	IP20	D	suspended	53/40/1140	>> 459207
27	4000	3300	white	yes	IP20	D	suspended	53/40/1140	>> 459245
27	4000	3300	black	yes	IP20	D	suspended	53/40/1140	>> 459283
27	4000	3300	grey	yes	IP44	D	suspended	53/40/1140	>> 459320
27	4000	3300	white	yes	IP44	D	suspended	53/40/1140	>> 459368
27	4000	3300	black	yes	IP44	D	suspended	53/40/1140	>> 459405
27	4000	3300	grey		IP20	D	suspended	53/40/1140	>> 459184
27	4000	3300	white		IP20	D	suspended	53/40/1140	>> 459221

BARIS 40 LED UGR

GENERAL CARD

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Colour of the body	DIMM DALI	Ingress protection	Energy efficiency class	Mounting version	Dimensions (H/W/T/S) [mm]	Index
27	4000	3300	black		IP20	D	suspended	53/40/1140	>> 459269
27	4000	3300	grey		IP44	D	suspended	53/40/1140	>> 459306
27	4000	3300	white		IP44	D	suspended	53/40/1140	>> 459344
27	4000	3300	black		IP44	D	suspended	53/40/1140	>> 459382
34	3000	3900	grey		IP20	E	suspended	53/40/1421	>> 459559
34	3000	3900	white		IP20	E	suspended	53/40/1421	>> 459573
34	3000	3900	black		IP20	E	suspended	53/40/1421	>> 459597
34	3000	3900	grey		IP44	E	suspended	53/40/1421	>> 459610
34	3000	3900	white		IP44	E	suspended	53/40/1421	>> 459634
34	3000	3900	black		IP44	E	suspended	53/40/1421	>> 459658
34	4000	4200	grey		IP20	D	suspended	53/40/1421	>> 459542
34	4000	4200	white		IP20	D	suspended	53/40/1421	>> 459566
34	4000	4200	black		IP20	D	suspended	53/40/1421	>> 459580
34	4000	4200	grey		IP44	D	suspended	53/40/1421	>> 459603
34	4000	4200	white		IP44	D	suspended	53/40/1421	>> 459627
34	4000	4200	black		IP44	D	suspended	53/40/1421	>> 459641
44	3000	4700	grey	yes	IP20	E	suspended	53/40/1421	>> 459757
44	3000	4700	white	yes	IP20	E	suspended	53/40/1421	>> 459795
44	3000	4700	black	yes	IP20	E	suspended	53/40/1421	>> 459832
44	3000	4700	grey	yes	IP44	E	suspended	53/40/1421	>> 459870
44	3000	4700	white	yes	IP44	E	suspended	53/40/1421	>> 459917
44	3000	4700	black	yes	IP44	E	suspended	53/40/1421	>> 459955
44	3000	4700	grey		IP20	E	suspended	53/40/1421	>> 459733
44	3000	4700	white		IP20	E	suspended	53/40/1421	>> 459771
44	3000	4700	black		IP20	E	suspended	53/40/1421	>> 459818
44	3000	4700	grey		IP44	E	suspended	53/40/1421	>> 459856
44	3000	4700	white		IP44	E	suspended	53/40/1421	>> 459894
44	3000	4700	black		IP44	E	suspended	53/40/1421	>> 459931
44	4000	5100	grey	yes	IP20	D	suspended	53/40/1421	>> 459740
44	4000	5100	white	yes	IP20	D	suspended	53/40/1421	>> 459788
44	4000	5100	black	yes	IP20	D	suspended	53/40/1421	>> 459825
44	4000	5100	grey	yes	IP44	D	suspended	53/40/1421	>> 459863
44	4000	5100	white	yes	IP44	D	suspended	53/40/1421	>> 459900
44	4000	5100	black	yes	IP44	D	suspended	53/40/1421	>> 459948
44	4000	5100	grey		IP20	D	suspended	53/40/1421	>> 459726
44	4000	5100	white		IP20	D	suspended	53/40/1421	>> 459764
44	4000	5100	black		IP20	D	suspended	53/40/1421	>> 459801
44	4000	5100	grey		IP44	D	suspended	53/40/1421	>> 459849


BARIS 40 LED UGR

GENERAL CARD

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Colour of the body	DIMM DALI	Ingress protection	Energy efficiency class	Mounting version	Dimensions (H/W/T/S) [mm]	Index
44	4000	5100	white		IP44	D	suspended	53/40/1421	>> 459887
44	4000	5100	black		IP44	D	suspended	53/40/1421	>> 459924

BARIS 40 LED VD

GENERAL CARD

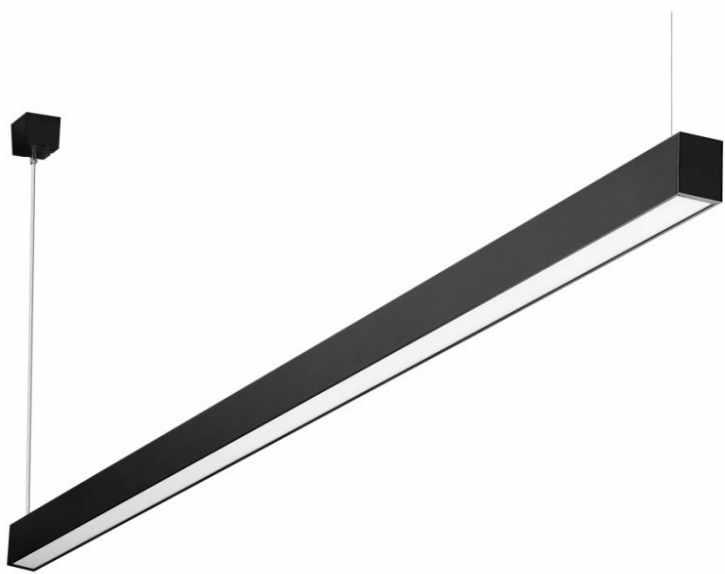

TECHNICAL PARAMETERS

Rated power of the luminaire [W]*:	15.00; 32.00; 39.00
Luminous flux [lm]*:	1100; 1350; 2500; 2700; 3100
Colour temperature [K]:	4000
Ingress protection:	IP20
Energy efficiency class:	E; F; G
Material of the body:	aluminium
Colour of the body:	black; grey; white
Diffuser type:	OPAL; PRM
Mounting version:	surface; suspended
Dimensions (H/W/T/S) [mm]:	53/40/1140; 53/40/1421; 53/40/579

CHARACTERISTICS

Suspended or surface-mounted luminaire with a very narrow cross-section. The bodies are available as an anodised aluminium profile in grey or as an aluminium profile painted in white or black (other colours available on request). Optical system in the form of an opal cover. The luminaire is equipped with a unique suspension system that facilitates mounting and adjustment of the suspension length. All suspended BARIS LED VD luminaires have slings with a box included in the set.

APPLICATION

The luminaire is intended for indoor use. Unique design, energy-saving LED modules, and possible integration with external lighting control systems in the DALI standard make this luminaire suitable for use in modern office buildings, with particular emphasis on representative rooms.

Versions marked "VD" are only intended for use in traffic zones and corridors inside buildings included in Table 5.1 of EN12464.

BARIS 40 LED VD

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

BARIS 40 LED VD surface

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Energy efficiency class	Colour of the body	Dimensions (H/W/T/S) [mm]	Ingress protection	Mounting version	Index
15	4000	1100	OPAL	F	grey	53/40/579	IP20	surface	>> 319228
15	4000	1100	OPAL	F	white	53/40/579	IP20	surface	>> 319242
15	4000	1100	OPAL	F	black	53/40/579	IP20	surface	>> 319266
15	4000	1350	PRM	F	grey	53/40/579	IP20	surface	>> 455384
15	4000	1350	PRM	F	white	53/40/579	IP20	surface	>> 455391
15	4000	1350	PRM	F	black	53/40/579	IP20	surface	>> 455407
32	4000	2500	OPAL	F	grey	53/40/1140	IP20	surface	>> 319402
32	4000	2500	OPAL	F	white	53/40/1140	IP20	surface	>> 319426
32	4000	2500	OPAL	F	black	53/40/1140	IP20	surface	>> 319440
32	4000	3100	PRM	E	grey	53/40/1140	IP20	surface	>> 455599
32	4000	3100	PRM	E	white	53/40/1140	IP20	surface	>> 455605
32	4000	3100	PRM	E	black	53/40/1140	IP20	surface	>> 455612
39	4000	2700	OPAL	G	grey	53/40/1421	IP20	surface	>> 319761
39	4000	2700	OPAL	G	white	53/40/1421	IP20	surface	>> 319785
39	4000	2700	OPAL	G	black	53/40/1421	IP20	surface	>> 319808
39	4000	3300	PRM	F	grey	53/40/1421	IP20	surface	>> 455650
39	4000	3300	PRM	F	white	53/40/1421	IP20	surface	>> 455667
39	4000	3300	PRM	F	black	53/40/1421	IP20	surface	>> 455674

BARIS 40 LED VD suspended

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Energy efficiency class	Colour of the body	Dimensions (H/W/T/S) [mm]	Ingress protection	Mounting version	Index
32	4000	2500	OPAL	F	grey	53/40/1140	IP20	suspended	>> 318689
32	4000	2500	OPAL	F	white	53/40/1140	IP20	suspended	>> 318702
32	4000	2500	OPAL	F	black	53/40/1140	IP20	suspended	>> 318726
32	4000	3100	PRM	E	grey	53/40/1140	IP20	suspended	>> 455568
32	4000	3100	PRM	E	white	53/40/1140	IP20	suspended	>> 455575
32	4000	3100	PRM	E	black	53/40/1140	IP20	suspended	>> 455582
39	4000	2700	OPAL	G	grey	53/40/1421	IP20	suspended	>> 318863
39	4000	2700	OPAL	G	white	53/40/1421	IP20	suspended	>> 318887
39	4000	2700	OPAL	G	black	53/40/1421	IP20	suspended	>> 318900
39	4000	3300	PRM	F	grey	53/40/1421	IP20	suspended	>> 455629
39	4000	3300	PRM	F	white	53/40/1421	IP20	suspended	>> 455636
39	4000	3300	PRM	F	black	53/40/1421	IP20	suspended	>> 455643

BARIS LED BRACKET

GENERAL CARD



TECHNICAL PARAMETERS

Rated power of the luminaire [W]*:	13.00 - 39.00
Luminous flux [lm]*:	1100 - 4450
Colour temperature [K]:	3000; 4000
Ingress protection:	IP44
Impact resistance:	IK06
Material of the body:	aluminium
Colour of the body:	black; grey; white
Diffuser material:	PC; PS
Diffuser type:	OPAL; PRM
Mounting version:	surface, wall mounted
Dimensions (H/W/T/S) [mm]:	53/71/579; 53/71/860
Warranty [years]:	5

CHARACTERISTICS

A luminaire with a very narrow cross-section. The bodies are available as an anodised aluminium profile in grey or as an aluminium profile painted in white or black (other colours available on request). Optical system in the form of an opal cover. The optical system in the form of a prismatic diaphragm reduces glare and is characterized by a greater light transmittance than the opal diffuser, which has a direct impact on a higher value of luminous efficacy.

APPLICATION

The unique design predisposes these luminaires to illuminate: offices, conference rooms, and other representative spaces, in offices, passageways, sanitary rooms, and bathrooms (wall lamps), in public utility buildings.

Versions marked "VD" are only intended for use in traffic zones and corridors inside buildings included in Table 5.1 of EN12464.

BARIS LED BRACKET

GENERAL CARD

AVAILABLE VERSIONS

 Click index >>, to see details

BARIS LED BRACKET 13W

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Colour of the body	DIMM DALI	Dimensions (H/W/T/S) [mm]	Index
13	3000	1300	OPAL	grey	yes	53/71/860	>> 674037
13	3000	1300	OPAL	white	yes	53/71/860	>> 675164
13	3000	1300	OPAL	black	yes	53/71/860	>> 674808
13	3000	1300	OPAL	grey		53/71/860	>> 674013
13	3000	1300	OPAL	white		53/71/860	>> 675140
13	3000	1300	OPAL	black		53/71/860	>> 674785
13	4000	1400	OPAL	grey	yes	53/71/860	>> 674006
13	4000	1400	OPAL	white	yes	53/71/860	>> 675133
13	4000	1400	OPAL	black	yes	53/71/860	>> 674778
13	4000	1400	OPAL	grey		53/71/860	>> 455865
13	4000	1400	OPAL	white		53/71/860	>> 675003
13	4000	1400	OPAL	black		53/71/860	>> 674648
13	3000	1500	PRM	grey	yes	53/71/860	>> 674044
13	3000	1500	PRM	white	yes	53/71/860	>> 675171
13	3000	1500	PRM	black	yes	53/71/860	>> 674815
13	3000	1500	PRM	grey		53/71/860	>> 674020
13	3000	1500	PRM	white		53/71/860	>> 675157
13	3000	1500	PRM	black		53/71/860	>> 674792
13	4000	1600	PRM	grey	yes	53/71/860	>> 455872
13	4000	1600	PRM	white	yes	53/71/860	>> 675010
13	4000	1600	PRM	black	yes	53/71/860	>> 674655
13	4000	1600	PRM	grey		53/71/860	>> 455964
13	4000	1600	PRM	white		53/71/860	>> 675102
13	4000	1600	PRM	black		53/71/860	>> 674747

BARIS LED BRACKET 16W

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Colour of the body	DIMM DALI	Dimensions (H/W/T/S) [mm]	Index
16	3000	1300	OPAL	grey	yes	53/71/579	>> 318955
16	3000	1300	OPAL	white	yes	53/71/579	>> 318993
16	3000	1300	OPAL	black	yes	53/71/579	>> 319037
16	3000	1300	OPAL	grey		53/71/579	>> 318931
16	3000	1300	OPAL	white		53/71/579	>> 318979
16	3000	1300	OPAL	black		53/71/579	>> 319013

BARIS LED BRACKET

GENERAL CARD

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Colour of the body	DIMM DALI	Dimensions (H/W/T/S) [mm]	Index
16	4000	1400	OPAL	grey	yes	53/71/579	>> 318948
16	4000	1400	OPAL	white	yes	53/71/579	>> 318986
16	4000	1400	OPAL	black	yes	53/71/579	>> 319020
16	4000	1400	OPAL	grey		53/71/579	>> 318924
16	4000	1400	OPAL	white		53/71/579	>> 318962
16	4000	1400	OPAL	black		53/71/579	>> 319006
16	3000	1600	PRM	grey	yes	53/71/579	>> 455445
16	3000	1600	PRM	white	yes	53/71/579	>> 455483
16	3000	1600	PRM	black	yes	53/71/579	>> 455520
16	3000	1600	PRM	grey		53/71/579	>> 455421
16	3000	1600	PRM	white		53/71/579	>> 455469
16	3000	1600	PRM	black		53/71/579	>> 455506
16	4000	1700	PRM	grey	yes	53/71/579	>> 455438
16	4000	1700	PRM	white	yes	53/71/579	>> 455476
16	4000	1700	PRM	black	yes	53/71/579	>> 455513
16	4000	1700	PRM	grey		53/71/579	>> 455414
16	4000	1700	PRM	white		53/71/579	>> 455452
16	4000	1700	PRM	black		53/71/579	>> 455490

BARIS LED BRACKET 39W

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Colour of the body	DIMM DALI	Dimensions (H/W/T/S) [mm]	Index
39	3000	3600	OPAL	grey	yes	53/71/860	>> 674099
39	3000	3600	OPAL	white	yes	53/71/860	>> 675225
39	3000	3600	OPAL	black	yes	53/71/860	>> 674860
39	3000	3600	OPAL	grey		53/71/860	>> 674075
39	3000	3600	OPAL	white		53/71/860	>> 675201
39	3000	3600	OPAL	black		53/71/860	>> 674846
39	4000	3900	OPAL	grey	yes	53/71/860	>> 674051
39	4000	3900	OPAL	white	yes	53/71/860	>> 675188
39	4000	3900	OPAL	black	yes	53/71/860	>> 674822
39	4000	3900	OPAL	grey		53/71/860	>> 455957
39	4000	3900	OPAL	white		53/71/860	>> 675096
39	4000	3900	OPAL	black		53/71/860	>> 674730
39	3000	4150	PRM	grey	yes	53/71/860	>> 674105
39	3000	4150	PRM	white	yes	53/71/860	>> 675232
39	3000	4150	PRM	black	yes	53/71/860	>> 674877
39	3000	4150	PRM	grey		53/71/860	>> 674082
39	3000	4150	PRM	white		53/71/860	>> 675218

BARIS LED BRACKET

GENERAL CARD

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Colour of the body	DIMM DALI	Dimensions (H/W/T/S) [mm]	Index
39	3000	4150	PRM	black		53/71/860	>> 674853
39	4000	4450	PRM	grey	yes	53/71/860	>> 674068
39	4000	4450	PRM	white	yes	53/71/860	>> 675195
39	4000	4450	PRM	black	yes	53/71/860	>> 674839
39	4000	4450	PRM	grey		53/71/860	>> 455971
39	4000	4450	PRM	white		53/71/860	>> 675119
39	4000	4450	PRM	black		53/71/860	>> 674754

BARIS LED BRACKET VD 15W

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Colour of the body	DIMM DALI	Dimensions (H/W/T/S) [mm]	Index
15	4000	1100	OPAL	grey		53/71/579	>> 319044
15	4000	1100	OPAL	white		53/71/579	>> 319068
15	4000	1100	OPAL	black		53/71/579	>> 319082
15	4000	1350	PRM	grey		53/71/579	>> 455537
15	4000	1350	PRM	white		53/71/579	>> 455544
15	4000	1350	PRM	black		53/71/579	>> 455551

TABLO LED

GENERAL CARD



TECHNICAL PARAMETERS

Ingress protection:	IP20
Nominal power [W]:	35.00; 70.00; 77.00
Luminous flux [lm]*:	4300 - 10050
Colour temperature [K]:	3000; 4000
Colour rendering index:	>80
SDCM:	≤ 3
Electrical protection class:	I
Energy efficiency class:	D; E
Material of the body:	steel; steel plate, aluminum
Colour of the body:	white
Optics material:	PMMA
Optics:	lens
Mounting version:	recessed; surface, suspended
Supply voltage [V]:	220-240
Frequency [Hz]:	50 - 60
Dimensions (H/W/T/S) [mm]:	85/1435/60

CHARACTERISTICS

The surface, recessed or suspended (suspension system as accessories) mounted fixture equipped with energy-saving LED panels and a lens generating asymmetric light distribution. It was made of a powder-coated white RAL 9003 steel sheet. Shade – a PMMA iridescent lens of 85% light transmission assures high efficiency of the fixture. Available in two power options: 35W with a single LED Panel and 70W with a double LED panel. Colour temperature: 3000K or 4000K. The fixture's colour rendering index is CRI>80 and standard deviation colour matching (SDCM): ≤ 3, assuring homogeneity and uniformity of light. Suspension of the luminaire is possible, thanks to a special suspension system (accessories).

APPLICATION

The fixture is equipped with linear lenses assuring asymmetric distribution with a beam angle of 20° that is perfect for illumination of boards, paintings and display cases. An iridescent lampshade disperses light assuring that objects are uniformly illuminated with no light reflex. The fixture is applied mostly in schools, universities, museums and art galleries.

TABLO LED

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

TABLO LED surface, suspended

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Energy efficiency class	Index
35	3000	4300	E	>> 514869
35	4000	4650	D	>> 514876
70	3000	8650	E	>> 514821
70	4000	9300	D	>> 514838
77	4000	10050	D	>> 660412


TABLO LED recessed

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Energy efficiency class	Index
35	3000	4300	E	>> 514883
35	4000	4650	D	>> 514890
70	3000	8650	E	>> 514845
70	4000	9300	D	>> 514852

TABLO LED

GENERAL CARD

LUMINOUS INTENSITY DISTRIB. CURVE



TABLO LED

TABLO LED

GENERAL CARD

ACCESSORIES AVAILABLE

index	Name
171512	SINGLE SUSPENDEED CORD
171635	SINGLE SUSPENDEED CORD (ROUND BOX)
171642	SINGLE SUSPENDEED CORD (SQUARE BOX)
171703	SINGLE ELECTRICAL SUSPENDEED CORD (ROUND BOX) TABLO NT
171710	SINGLE ELECTRICAL SUSPENDEED CORD (SQUARE BOX) TABLO NT



SINGLE SUSPENDEED CORD (171512)



SINGLE SUSPENDEED CORD (ROUND BOX) (171635)



SINGLE SUSPENDEED CORD (SQUARE BOX) (171642)



SINGLE ELECTRICAL SUSPENDEED CORD (ROUND BOX) TABLO NT (171703)



SINGLE ELECTRICAL SUSPENDEED CORD (SQUARE BOX) TABLO NT (171710)

VECTOR 3 LED

GENERAL CARD



TECHNICAL PARAMETERS

Ingress protection:	IP40
Impact resistance:	IK07
Nominal power [W]:	16.00 - 60.00
Luminous flux [lm]*:	1950 - 6900
Colour temperature [K]:	3000; 4000
Colour rendering index:	>80
SDCM:	≤ 3
Energy efficiency class:	D; E
Material of the body:	powder coated steel
Diffuser material:	PC
Diffuser type:	PRM MAT
Mounting version:	surface
Dimensions (H/W/T/S) [mm]:	1161/61/125; 1441/126/60; 601/61/125
Warranty [years]:	5

CHARACTERISTICS

Surface mounted luminaire made of powder coated white steel with prismatic or prismatic mat PC diffuser providing soft & uniform light. Equipped with LED modules with high luminous efficacy and SDCM <3. The luminaire in standard version has a 5 pole terminal block, that enables quick through-wiring, and strain relief.

APPLICATION

Multi-purpose LED luminaire designed for indoor application. Especially recommended for public rooms and corridors (administration buildings, schools, universities and health care buildings).

VECTOR 3 LED

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

VECTOR 3 LED 16W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	Corridor function	DIMM DALI	Through wiring	Emergency lighting [h]	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
16	3000	1950	PRM MAT						601/61/125	E	>> 661228
16	4000	2100	PRM MAT						601/61/125	E	>> 661211
16	3000	1950	PRM MAT	yes					601/61/125	E	>> 661389
16	4000	2100	PRM MAT	yes					601/61/125	E	>> 661372
16	3000	1950	PRM MAT			yes			601/61/125	E	>> 661501
16	4000	2100	PRM MAT			yes			601/61/125	E	>> 661495
16	3000	1950	PRM MAT	yes	yes	yes			601/61/125	E	>> 661624
16	4000	2100	PRM MAT	yes	yes	yes			601/61/125	E	>> 661617

VECTOR 3 LED 24W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	Corridor function	DIMM DALI	Through wiring	Emergency lighting [h]	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
24	3000	2600	PRM MAT						601/61/125	E	>> 661266
24	4000	2750	PRM MAT						601/61/125	E	>> 661259
24	3000	2600	PRM MAT	yes					601/61/125	E	>> 661402
24	4000	2750	PRM MAT	yes					601/61/125	E	>> 661396
24	3000	2600	PRM MAT			yes			601/61/125	E	>> 661525
24	4000	2750	PRM MAT			yes			601/61/125	E	>> 661518
24	3000	2600	PRM MAT	yes	yes	yes			601/61/125	E	>> 661648
24	4000	2750	PRM MAT	yes	yes	yes			601/61/125	E	>> 661631

VECTOR 3 LED 32W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	Corridor function	DIMM DALI	Through wiring	Emergency lighting [h]	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
-------------------	------------------------	---------------------	---------------	---------------	-------------------	-----------	----------------	------------------------	---------------------------	-------------------------	-------

VECTOR 3 LED

GENERAL CARD

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	Corridor function	DIMM DALI	Through wiring	Emergency lighting [h]	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
32	3000	3850	PRM MAT						1161/61/125	E	>> 661242
32	4000	4150	PRM MAT						1161/61/125	E	>> 661235
32	3000	3850	PRM MAT					3	1161/61/125	E	>> 661747
32	4000	4150	PRM MAT					3	1161/61/125	E	>> 661730
32	3000	3850	PRM MAT				LS2		1161/61/125	E	>> 661822
32	4000	4150	PRM MAT				LS2		1161/61/125	E	>> 661815
32	3000	3850	PRM MAT	yes					1161/61/125	E	>> 661426
32	4000	4150	PRM MAT	yes					1161/61/125	E	>> 661419
32	3000	3850	PRM MAT			yes			1161/61/125	E	>> 661549
32	4000	4150	PRM MAT			yes			1161/61/125	E	>> 661532
32	3000	3850	PRM MAT	yes	yes	yes			1161/61/125	E	>> 661662
32	4000	4150	PRM MAT	yes	yes	yes			1161/61/125	E	>> 661655

VECTOR 3 LED 40W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	Corridor function	DIMM DALI	Through wiring	Emergency lighting [h]	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
40	3000	4700	PRM MAT						1441/126/60	E	>> 661365
40	4000	5100	PRM MAT						1441/126/60	D	>> 661358
40	3000	4700	PRM MAT					3	1441/126/60	E	>> 661785
40	4000	5100	PRM MAT					3	1441/126/60	D	>> 661778
40	3000	4700	PRM MAT				LS2		1441/126/60	E	>> 661860
40	4000	5100	PRM MAT				LS2		1441/126/60	D	>> 661853
40	3000	4700	PRM MAT	yes					1441/126/60	E	>> 661464
40	4000	5100	PRM MAT	yes					1441/126/60	D	>> 661457
40	4000	5100	PRM MAT			yes			1441/126/60	D	>> 661570
40	3000	4700	PRM MAT	yes	yes	yes			1441/126/60	E	>> 661709

VECTOR 3 LED

GENERAL CARD

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	Corridor function	DIMM DALI	Through wiring	Emergency lighting [h]	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
40	4000	5100	PRM MAT	yes	yes	yes			1441/126/60	D	>> 661693

VECTOR 3 LED 48W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	Corridor function	DIMM DALI	Through wiring	Emergency lighting [h]	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
48	3000	5300	PRM MAT						1161/61/125	E	>> 661280
48	3000	5300	PRM MAT					3	1161/61/125	E	>> 661761
48	4000	5700	PRM MAT					3	1161/61/125	E	>> 661754
48	3000	5300	PRM MAT				LS2		1161/61/125	E	>> 661846
48	4000	5700	PRM MAT				LS2		1161/61/125	E	>> 661839
48	3000	5300	PRM MAT	yes					1161/61/125	E	>> 661440
48	4000	5700	PRM MAT	yes					1161/61/125	E	>> 661433
48	3000	5300	PRM MAT			yes			1161/61/125	E	>> 661563
48	4000	5700	PRM MAT			yes			1161/61/125	E	>> 661556
48	4000	5700	PRM MAT						1161/61/125	E	>> 661273
48	3000	5300	PRM MAT	yes	yes	yes			1161/61/125	E	>> 661686
48	4000	5700	PRM MAT	yes	yes	yes			1161/61/125	E	>> 661679

VECTOR 3 LED 60W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	Corridor function	DIMM DALI	Through wiring	Emergency lighting [h]	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
60	3000	6400	PRM MAT						1441/126/60	E	>> 661341
60	4000	6900	PRM MAT						1441/126/60	E	>> 661334
60	3000	6400	PRM MAT					3	1441/126/60	E	>> 661808
60	4000	6900	PRM MAT					3	1441/126/60	E	>> 661792
60	3000	6400	PRM MAT				LS2		1441/126/60	E	>> 661884
60	4000	6900	PRM MAT				LS2		1441/126/60	E	>> 661877

VECTOR 3 LED


GENERAL CARD

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	Corridor function	DIMM DALI	Through wiring	Emergency lighting [h]	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
60	3000	6400	PRM MAT	yes					1441/126/60	E	>> 661488
60	4000	6900	PRM MAT	yes					1441/126/60	E	>> 661471
60	3000	6400	PRM MAT			yes			1441/126/60	E	>> 661600
60	4000	6900	PRM MAT			yes			1441/126/60	E	>> 661594
60	3000	6400	PRM MAT	yes	yes	yes			1441/126/60	E	>> 661723
60	4000	6900	PRM MAT	yes	yes	yes			1441/126/60	E	>> 661716

VECTOR 3 LED

GENERAL CARD

LUMINOUS INTENSITY DISTRIB. CURVE



VECTOR 3 LED PRM MAT

VECTOR 3 LED VD

GENERAL CARD



TECHNICAL PARAMETERS

Ingress protection:	IP40
Impact resistance:	IK07
Nominal power [W]:	31.00 - 77.00
Luminous flux [lm]*:	3100 - 8900
Colour temperature [K]:	4000
Colour rendering index:	>80
SDCM:	≤ 3
Energy efficiency class:	E; F
Material of the body:	Raw steel sheet, powder coated
Diffuser material:	PC
Diffuser type:	PRM; PRM MAT
Mounting version:	surface
Dimensions (H/W/T/S) [mm]:	1161/126/60; 1441/126/60; 601/126/60
Warranty [years]:	5

CHARACTERISTICS

Surface-mounted luminaire made of powder-coated white steel with prismatic or prismatic mat PC diffuser providing soft & uniform light. Equipped with LED modules with high luminous efficacy and SDCM <3. The luminaire in the standard version has a 5 pole terminal block, that enables quick through-wiring, and strain relief.

Available versions:
- motion sensor (RCR).

APPLICATION

Multi-purpose LED luminaire designed for indoor application. Especially recommended for public rooms and corridors (administration buildings, schools, universities and health care buildings). The luminaire is intended for general areas inside buildings – store rooms and storage rack areas as well as cold stores included in tables 5.4 and 5.5 of the EN12464 standard; for indoor traffic zones included in table 5.1 of the EN12464 standard and for parking areas and as lighting of railway installations included in table 5.34 and 5.53 of the EN12464 standard, excluding ticket and luggage offices, counters, waiting rooms, entrance halls and lounges.

VECTOR 3 LED VD

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

VECTOR 3 LED VD 31W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
31	4000	3600	PRM		601/126/60	E	>> 661037
31	4000	3100	PRM MAT		601/126/60	F	>> 661006
31	4000	3600	PRM	yes	601/126/60	E	>> 661099
31	4000	3100	PRM MAT	yes	601/126/60	F	>> 661068

VECTOR 3 LED VD 41W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
41	4000	5000	PRM		1161/126/60	E	>> 661044
41	4000	4300	PRM MAT		1161/126/60	E	>> 661013
41	4000	5000	PRM	yes	1161/126/60	E	>> 661105
41	4000	4300	PRM MAT	yes	1161/126/60	E	>> 661075


VECTOR 3 LED VD 77W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
77	4000	8900	PRM		1441/126/60	E	>> 661051
77	4000	7700	PRM MAT		1441/126/60	F	>> 661020
77	4000	8900	PRM	yes	1441/126/60	E	>> 661112
77	4000	7700	PRM MAT	yes	1441/126/60	F	>> 661082


VECTOR 3 LED VD

GENERAL CARD

LUMINOUS INTENSITY DISTRIB. CURVE



VECTOR 3 LED PRM



VECTOR 3 LED PRM MAT

VECTOR 3 MULTI LED

GENERAL CARD



TECHNICAL PARAMETERS

Ingress protection:	IP40
Impact resistance:	IK07
Colour temperature [K]:	4000
Colour rendering index:	>80
SDCM:	≤ 3
Energy efficiency class:	A+
Material of the body:	powder coated steel
Diffuser material:	PC
Diffuser type:	PRM MAT
Mounting version:	surface
Dimensions (H/W/T/S) [mm]:	1161/61/125; 1441/126/60; 601/61/125
Warranty [years]:	5

CHARACTERISTICS

Surface mounted luminaire made of powder coated white steel with prismatic or prismatic mat PC diffuser providing soft & uniform light. Equipped with LED GO! modules with high luminous efficacy and SDCM <3. The luminaire in standard version has a 5 pole terminal block, that enables quick through-wiring, and strain relief.

The MULTI luminaire version allows individual configuration: thanks to the built-in microswitch, it is possible to choose one of four settings (nominal power of the fitting [W] / luminous flux of the fitting [lm]):

- 13W-24W - 13/1700; 17/2100; 20/2450; 24/2750;
- 26W-48W - 26/3350; 34/4150; 40/4900; 48/5700;
- 34W-59W - 34/4200; 42/5150; 51/6000; 59/6900.

APPLICATION

Multi-purpose LED luminaire designed for indoor application. Especially recommended for public rooms and corridors (administration buildings, schools, universities and health care buildings). The luminaire is intended for general areas inside buildings – store rooms and storage rack areas as well as cold stores included in tables 5.4 and 5.5 of the EN12464 standard; for indoor traffic zones included in table 5.1 of the EN12464 standard and for parking areas and as lighting of railway installations included in table 5.34 and 5.53 of the EN12464 standard, excluding ticket and luggage offices, counters, waiting rooms, entrance halls and lounges.

VECTOR 3 MULTI LED

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

VECTOR 3 MULTI LED 13/17/20/24W

Nominal power [W] - range	Colour temperature [K]	Luminous flux of the luminaire [lm] - range	Diffuser type	Motion sensor	Through wiring	Emergency lighting [h]	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
13/17/20/24	4000	1700/2100/2450/2750	PRM MAT				601/61/125	A+	>> 661891
13/17/20/24	4000	1700/2100/2450/2750	PRM MAT	yes			601/61/125	A+	>> 661945

VECTOR 3 MULTI LED 26/34/40/48W

Nominal power [W] - range	Colour temperature [K]	Luminous flux of the luminaire [lm] - range	Diffuser type	Motion sensor	Through wiring	Emergency lighting [h]	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
26/34/40/48	4000	3350/4150/4900/5700	PRM MAT				1161/61/125	A+	>> 661907
26/34/40/48	4000	3350/4150/4900/5700	PRM MAT			3	1161/61/125	A+	>> 661976
26/34/40/48	4000	3350/4150/4900/5700	PRM MAT	yes			1161/61/125	A+	>> 661952
26/34/40/48	4000	3350/4150/4900/5700	PRM MAT		LS2		1161/61/125	A+	>> 661921


VECTOR 3 MULTI LED 34/42/51/59W

Nominal power [W] - range	Colour temperature [K]	Luminous flux of the luminaire [lm] - range	Diffuser type	Motion sensor	Through wiring	Emergency lighting [h]	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
34/42/51/59	4000	4200/5150/6000/6900	PRM MAT				1441/126/60	A+	>> 661914
34/42/51/59	4000	4200/5150/6000/6900	PRM MAT			3	1441/126/60	A+	>> 661983
34/42/51/59	4000	4200/5150/6000/6900	PRM MAT	yes			1441/126/60	A+	>> 661969
34/42/51/59	4000	4200/5150/6000/6900	PRM MAT		LS2		1441/126/60	A+	>> 661938

VECTOR 3 MULTI LED

GENERAL CARD

LUMINOUS INTENSITY DISTRIB. CURVE



VECTOR 3 MULTI LED

VESPO LED

GENERAL CARD



TECHNICAL PARAMETERS

Ingress protection:	IP44
Impact resistance:	IK07
Nominal power [W]:	17.00 - 71.00
Luminous flux [lm]*:	2100 - 9800
Colour temperature [K]:	3000; 4000
Colour rendering index:	>80
SDCM:	≤ 3
Energy efficiency class:	C; D; E
Material of the body:	powder coated steel
Diffuser material:	PC
Diffuser type:	PRM; PRM MAT
Mounting version:	surface
Dimensions (H/W/T/S) [mm]:	1161/124/60; 1441/124/60; 601/124/60

CHARACTERISTICS

Surface mounted luminaire made of powder coated white steel with prismatic or prismatic mat PC diffuser providing soft & uniform light. Equipped with LED modules with high luminous efficacy and SDCM <3. The luminaire in standard version has a 5 pole terminal block, that enables quick through-wiring, and strain relief.

Available versions:

- motion sensor (RCR),
- DALI,
- through-wiring (LS2),
- emergency module.

APPLICATION

Multi-purpose LED luminaire designed for indoor application. Especially recommended for public rooms and corridors (administration buildings, schools, universities and health care buildings).

VESPO LED

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

VESPO LED 17W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	DIMM DALI	Emergency lighting [h]	Operating mode	Autotest	Through wiring	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
17	3000	2100	PRM MAT				M			601/124/60	D	>> 643590
17	3000	2400	PRM				M			601/124/60	D	>> 643576
17	3000	2100	PRM MAT	yes			M			601/124/60	D	>> 643637
17	3000	2400	PRM	yes			M			601/124/60	D	>> 643613
17	4000	2250	PRM MAT				M			601/124/60	D	>> 643606
17	4000	2600	PRM				M			601/124/60	C	>> 643583
17	4000	2250	PRM MAT	yes			M			601/124/60	D	>> 643644
17	4000	2600	PRM	yes			M			601/124/60	C	>> 643620

VESPO LED 27W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	DIMM DALI	Emergency lighting [h]	Operating mode	Autotest	Through wiring	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
27	3000	3200	PRM			3	M	yes		1161/124/60	E	>> 643262
27	3000	3200	PRM MAT				M		LS2	1161/124/60	E	>> 643040
27	3000	3750	PRM				M		LS2	1161/124/60	D	>> 643163
27	3000	3200	PRM MAT							1161/124/60	E	>> 639937
27	3000	3750	PRM							1161/124/60	D	>> 639838
27	3000	3750	PRM			3	M	yes		1161/124/60	D	>> 643286
27	3000	3200	PRM MAT		yes		M			1161/124/60	E	>> 642616
27	3000	3750	PRM		yes		M			1161/124/60	D	>> 642838
27	3000	3200	PRM MAT	yes			M			1161/124/60	E	>> 642722
27	3000	3750	PRM	yes			M			1161/124/60	D	>> 642944
27	4000	3500	PRM			3	M	yes		1161/124/60	E	>> 643279
27	4000	4050	PRM			3	M	yes		1161/124/60	D	>> 643293
27	4000	3500	PRM MAT				M		LS2	1161/124/60	E	>> 643057
27	4000	4050	PRM				M		LS2	1161/124/60	D	>> 643170
27	4000	3500	PRM MAT							1161/124/60	E	>> 639982
27	4000	4050	PRM							1161/124/60	D	>> 639883

VESPO LED

GENERAL CARD

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	DIMM DALI	Emergency lighting [h]	Operating mode	Autotest	Through wiring	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
27	4000	3500	PRM MAT		yes		M			1161/124/60	E	>> 642623
27	4000	4050	PRM		yes		M			1161/124/60	D	>> 642845
27	4000	3500	PRM MAT	yes			M			1161/124/60	E	>> 642739
27	4000	4050	PRM	yes			M			1161/124/60	D	>> 642951

VESPO LED 28W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	DIMM DALI	Emergency lighting [h]	Operating mode	Autotest	Through wiring	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
28	3000	3150	PRM MAT							601/124/60	E	>> 639944
28	3000	3650	PRM							601/124/60	E	>> 639845
28	3000	3150	PRM MAT		yes		M			601/124/60	E	>> 642692
28	3000	3650	PRM		yes		M			601/124/60	E	>> 642920
28	3000	3150	PRM MAT	yes			M			601/124/60	E	>> 642814
28	3000	3650	PRM	yes			M			601/124/60	E	>> 643026
28	4000	3350	PRM MAT							601/124/60	E	>> 639999
28	4000	3900	PRM							601/124/60	D	>> 639890
28	4000	3350	PRM MAT		yes		M			601/124/60	E	>> 642715
28	4000	3900	PRM		yes		M			601/124/60	D	>> 642937
28	4000	3350	PRM MAT	yes			M			601/124/60	E	>> 642821
28	4000	3900	PRM	yes			M			601/124/60	D	>> 643033

VESPO LED 34W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	DIMM DALI	Emergency lighting [h]	Operating mode	Autotest	Through wiring	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
34	3000	4150	PRM MAT				M			1161/124/60	D	>> 643477
34	3000	4800	PRM				M			1161/124/60	D	>> 643453
34	3000	4150	PRM MAT				M		LS2	1161/124/60	D	>> 643552
34	3000	4800	PRM				M		LS2	1161/124/60	D	>> 643538
34	3000	4150	PRM MAT	yes			M			1161/124/60	D	>> 643514
34	3000	4800	PRM	yes			M			1161/124/60	D	>> 643491
34	4000	4450	PRM MAT				M			1161/124/60	D	>> 643484
34	4000	5150	PRM				M			1161/124/60	C	>> 643460

VESPO LED

GENERAL CARD

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	DIMM DALI	Emergency lighting [h]	Operating mode	Autotest	Through wiring	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
34	4000	4450	PRM MAT				M		LS2	1161/124/60	D	>> 643569
34	4000	5150	PRM				M		LS2	1161/124/60	C	>> 643545
34	4000	4450	PRM MAT	yes			M			1161/124/60	D	>> 643521
34	4000	5150	PRM	yes			M			1161/124/60	C	>> 643507

VESPO LED 48W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	DIMM DALI	Emergency lighting [h]	Operating mode	Autotest	Through wiring	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
48	3000	5700	PRM MAT				M		LS2	1441/124/60	E	>> 643088
48	3000	6600	PRM				M		LS2	1441/124/60	D	>> 643200
48	3000	5700	PRM MAT							1441/124/60	E	>> 639913
48	3000	6600	PRM							1441/124/60	D	>> 639814
48	3000	5700	PRM MAT		yes		M			1441/124/60	E	>> 642654
48	3000	6600	PRM		yes		M			1441/124/60	D	>> 642876
48	3000	5700	PRM MAT	yes			M			1441/124/60	E	>> 642760
48	3000	6600	PRM	yes			M			1441/124/60	D	>> 642982
48	4000	6100	PRM MAT				M		LS2	1441/124/60	D	>> 643095
48	4000	7100	PRM				M		LS2	1441/124/60	D	>> 643217
48	4000	6100	PRM MAT							1441/124/60	D	>> 639968
48	4000	7100	PRM							1441/124/60	D	>> 639869
48	4000	6100	PRM MAT		yes		M			1441/124/60	D	>> 642661
48	4000	7100	PRM		yes		M			1441/124/60	D	>> 642883
48	4000	6100	PRM MAT	yes			M			1441/124/60	D	>> 642777
48	4000	7100	PRM	yes			M			1441/124/60	D	>> 642999

VESPO LED 50W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	DIMM DALI	Emergency lighting [h]	Operating mode	Autotest	Through wiring	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
50	3000	5650	PRM			3	M	yes		1161/124/60	E	>> 643309
50	3000	6550	PRM			3	M	yes		1161/124/60	D	>> 643323
50	3000	5650	PRM MAT				M		LS2	1161/124/60	E	>> 643064
50	3000	6550	PRM				M		LS2	1161/124/60	D	>> 643187

VESPO LED

GENERAL CARD

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	DIMM DALI	Emergency lighting [h]	Operating mode	Autotest	Through wiring	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
50	3000	5650	PRM MAT							1161/124/60	E	>> 639920
50	3000	6550	PRM							1161/124/60	D	>> 639821
50	3000	5650	PRM MAT		yes		M			1161/124/60	E	>> 642630
50	3000	6550	PRM		yes		M			1161/124/60	D	>> 642852
50	3000	5650	PRM MAT	yes			M			1161/124/60	E	>> 642746
50	3000	6550	PRM	yes			M			1161/124/60	D	>> 642968
50	4000	6050	PRM			3	M	yes		1161/124/60	E	>> 643316
50	4000	7000	PRM			3	M	yes		1161/124/60	D	>> 643330
50	4000	6050	PRM MAT				M		LS2	1161/124/60	E	>> 643071
50	4000	7000	PRM				M		LS2	1161/124/60	D	>> 643194
50	4000	6050	PRM MAT							1161/124/60	E	>> 639975
50	4000	7000	PRM							1161/124/60	D	>> 639876
50	4000	6050	PRM MAT		yes		M			1161/124/60	E	>> 642647
50	4000	7000	PRM		yes		M			1161/124/60	D	>> 642869
50	4000	6050	PRM MAT	yes			M			1161/124/60	E	>> 642753
50	4000	7000	PRM	yes			M			1161/124/60	D	>> 642975

VESPO LED 71W


Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	DIMM DALI	Emergency lighting [h]	Operating mode	Autotest	Through wiring	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
71	3000	7850	PRM MAT				M		LS2	1441/124/60	E	>> 643101
71	3000	9100	PRM				M		LS2	1441/124/60	D	>> 643224
71	3000	7850	PRM MAT							1441/124/60	E	>> 639906
71	3000	9100	PRM							1441/124/60	D	>> 639807
71	3000	7850	PRM MAT		yes		M			1441/124/60	E	>> 642678
71	3000	9100	PRM		yes		M			1441/124/60	D	>> 642890
71	3000	7850	PRM MAT	yes			M			1441/124/60	E	>> 642784
71	3000	9100	PRM	yes			M			1441/124/60	D	>> 643002
71	4000	8450	PRM MAT				M		LS2	1441/124/60	E	>> 643118
71	4000	9800	PRM				M		LS2	1441/124/60	D	>> 643231
71	4000	8450	PRM MAT							1441/124/60	E	>> 639951

VESPO LED


GENERAL CARD

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	DIMM DALI	Emergency lighting [h]	Operating mode	Autotest	Through wiring	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
71	4000	9800	PRM							1441/124/60	D	>> 639852
71	4000	8450	PRM MAT		yes		M			1441/124/60	E	>> 642685
71	4000	9800	PRM		yes		M			1441/124/60	D	>> 642913
71	4000	8450	PRM MAT	yes			M			1441/124/60	E	>> 642791
71	4000	9800	PRM	yes			M			1441/124/60	D	>> 643019

LUMINOUS INTENSITY DISTRIB. CURVE



VESPO LED PRM



VESPO LED PRM MAT

VESPO LED


GENERAL CARD

ACCESSORIES AVAILABLE

index	Name
81000110	Hang single Y-type support 1.5m silver

ELEGANTE LED SYSTEM

LED GO!

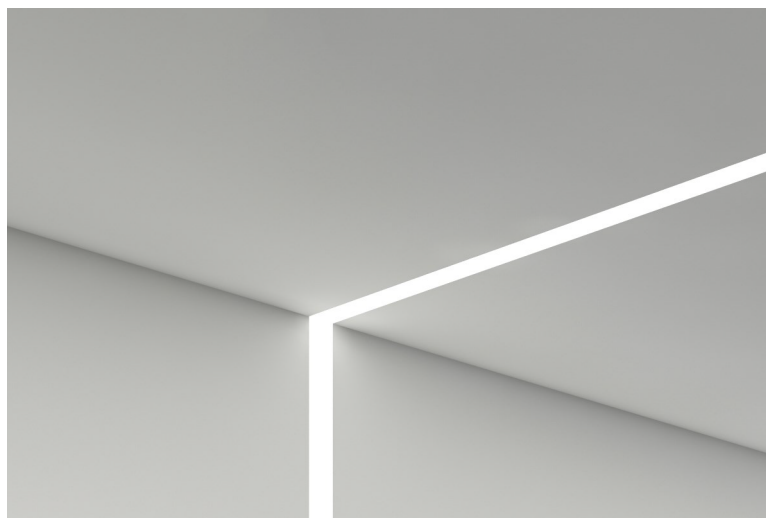

220-240 V | LED |  | IP20 | IP40 | IP44 | IK02 | IK04

TECHNICAL PARAMETERS

Ingress protection:	IP44/IP40; IP40; IP44/IP20;
Impact resistance:	IK04; IK02;
Nominal power [W]:	8.00 - 30.00
Luminous flux [lm]*:	700 - 2400
Colour temperature [K]:	3000; 4000;
SDCM:	≤ 3;
Energy efficiency class:	A;
Material of the body:	aluminium;
Colour of the body:	silver;
Diffuser material:	PC;
Diffuser type:	none; OPAL;
Mounting version:	recessed;
Dimensions [mm]:	1123/90/65; 562/90/65; 315/315/65; 580/580/65; 575/52/66; 1136/52/66;

*Tolerance +/- 10%

CHARACTERISTICS

ELEGANTE LED SYSTEM is a modern office fixture designed for flush mounting. It provides a combination of high light parameters and a modern decorative effect. The optical design has been designed using an iridescent diaphragm with high permeability and uniform light distribution. Available system switches allow for the design of concealed light lines in various configurations (T, X, L). The advantage of the system's roofs is the lampshade without connections to max. length 25m.

There is also a version of individual fittings.

Available 2 power options - to connect as part of:

- 16W i 8W,
- 30W i 15W.

Assembly should be carried out by qualified person.

Please feel free to contact our lighting designers.



APPLICATION

The luminaire is dedicated for internal use. For use in office and commercial facilities, in particular in representative rooms.

ELEGANTE LED SYSTEM

LEDGO!

LIGHTING EXAMPLES

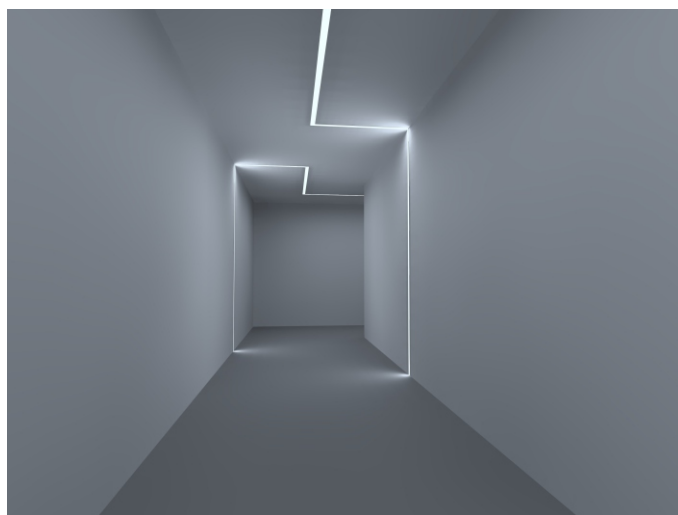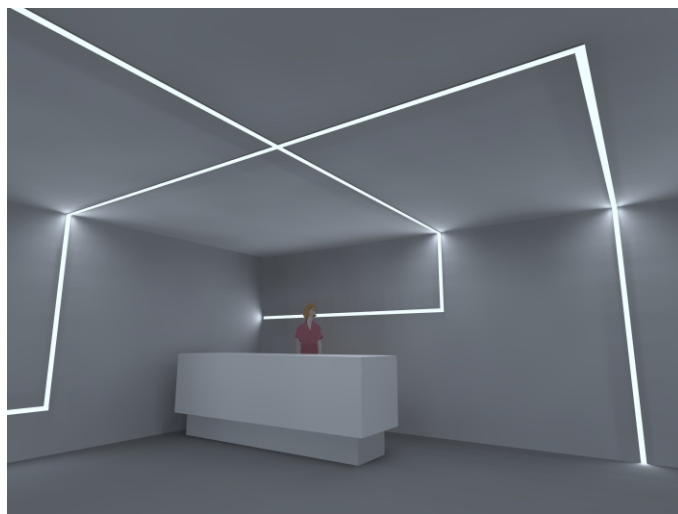

ELEGANTE LED SYSTEM

LEDGO!

AVAILABLE TYPES

[Click >> index, to see details](#)

ELEGANTE LED SYSTEM SYSTEM 16W/8W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	DIMM DALI	Version	Dimensions [mm]	Ingress protection	Energy efficiency class	Index
8	3000	700	none	yes	start module	562/90/65	IP44/IP40	A	>> 388477
8	4000	700	none	yes	start module	562/90/65	IP44/IP40	A	>> 388156
8	3000	700	none		start module	562/90/65	IP44/IP40	A	>> 388446
8	4000	700	none		start module	562/90/65	IP44/IP40	A	>> 388125
16	3000	1400	none	yes	start module	1123/90/65	IP44/IP40	A	>> 388538
16	4000	1400	none	yes	start module	1123/90/65	IP44/IP40	A	>> 388217
16	3000	1400	none		start module	1123/90/65	IP44/IP40	A	>> 388507
16	4000	1400	none		start module	1123/90/65	IP44/IP40	A	>> 388187
16	3000	1400	none	yes	middle module	1123/90/65	IP44/IP40	A	>> 388545
16	4000	1400	none	yes	middle module	1123/90/65	IP44/IP40	A	>> 388224
16	3000	1400	none		middle module	1123/90/65	IP44/IP40	A	>> 388514
16	4000	1400	none		middle module	1123/90/65	IP44/IP40	A	>> 388194
16	3000	1400	none	yes	end module	1123/90/65	IP44/IP40	A	>> 388552
16	4000	1400	none	yes	end module	1123/90/65	IP44/IP40	A	>> 388231
16	3000	1400	none		end module	1123/90/65	IP44/IP40	A	>> 388521
16	4000	1400	none		end module	1123/90/65	IP44/IP40	A	>> 388200
8	3000	700	OPAL	yes	L connector	315/315/65	IP40	A	>> 388491
8	4000	700	OPAL	yes	L connector	315/315/65	IP40	A	>> 388170
8	3000	700	OPAL		L connector	315/315/65	IP40	A	>> 388460
8	4000	700	OPAL		L connector	315/315/65	IP40	A	>> 388149
12	3000	1050	OPAL	yes	T connector	580/580/65	IP40	A	>> 388644
12	4000	1050	OPAL	yes	T connector	580/580/65	IP40	A	>> 388651
12	3000	1050	OPAL		T connector	580/580/65	IP40	A	>> 388682
12	4000	1050	OPAL		T connector	580/580/65	IP40	A	>> 388699
16	3000	1400	OPAL	yes	X connector	580/580/65	IP40	A	>> 388361
16	4000	1400	OPAL	yes	X connector	580/580/65	IP40	A	>> 388040
16	3000	1400	OPAL		X connector	580/580/65	IP40	A	>> 388330
16	4000	1400	OPAL		X connector	580/580/65	IP40	A	>> 388019

ELEGANTE LED SYSTEM SYSTEM 30W/15W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	DIMM DALI	Version	Dimensions [mm]	Ingress protection	Energy efficiency class	Index
15	3000	1200	none	yes	start module	562/90/65	IP44/IP40	A	>> 388354
15	4000	1200	none	yes	start module	562/90/65	IP44/IP40	A	>> 388033
15	3000	1200	none		start module	562/90/65	IP44/IP40	A	>> 388323
15	4000	1200	none		start module	562/90/65	IP44/IP40	A	>> 388002
30	3000	2400	none	yes	start module	1123/90/65	IP44/IP40	A	>> 388415
30	4000	2400	none	yes	start module	1123/90/65	IP44/IP40	A	>> 388095
30	3000	2400	none		start module	1123/90/65	IP44/IP40	A	>> 388385
30	4000	2400	none		start module	1123/90/65	IP44/IP40	A	>> 388064
30	3000	2400	none	yes	middle module	1123/90/65	IP44/IP40	A	>> 388422
30	4000	2400	none	yes	middle module	1123/90/65	IP44/IP40	A	>> 388101
30	3000	2400	none		middle module	1123/90/65	IP44/IP40	A	>> 388392
30	4000	2400	none		middle module	1123/90/65	IP44/IP40	A	>> 388071
30	3000	2400	none	yes	end module	1123/90/65	IP44/IP40	A	>> 388439
30	4000	2400	none	yes	end module	1123/90/65	IP44/IP40	A	>> 388118
30	3000	2400	none		end module	1123/90/65	IP44/IP40	A	>> 388408
30	4000	2400	none		end module	1123/90/65	IP44/IP40	A	>> 388088

ELEGANTE LED SYSTEM

LEDGO!

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	DIMM DALI	Version	Dimensions [mm]	Ingress protection	Energy efficiency class	Index
15	3000	1200	OPAL	yes	L connector	315/315/65	IP40	A	>> 388378
15	4000	1200	OPAL	yes	L connector	315/315/65	IP40	A	>> 388057
15	3000	1200	OPAL		L connector	315/315/65	IP40	A	>> 388347
15	4000	1200	OPAL		L connector	315/315/65	IP40	A	>> 388026
23	3000	1800	OPAL	yes	T connector	580/580/65	IP40	A	>> 388668
23	4000	1800	OPAL	yes	T connector	580/580/65	IP40	A	>> 388675
23	3000	1800	OPAL		T connector	580/580/65	IP40	A	>> 388705
23	4000	1800	OPAL		T connector	580/580/65	IP40	A	>> 388712
30	3000	2400	OPAL	yes	X connector	580/580/65	IP40	A	>> 388484
30	4000	2400	OPAL	yes	X connector	580/580/65	IP40	A	>> 388163
30	3000	2400	OPAL		X connector	580/580/65	IP40	A	>> 388453
30	4000	2400	OPAL		X connector	580/580/65	IP40	A	>> 388132

ELEGANTE LED SYSTEM INDIVIDUAL VARIANT 16W/8W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	DIMM DALI	Version	Dimensions [mm]	Ingress protection	Energy efficiency class	Index
8	4000	700	OPAL	yes	individual	575/52/66	IP44/IP20	A	>> 388293
8	3000	700	OPAL	yes	individual	575/52/66	IP44/IP20	A	>> 388613
8	4000	700	OPAL		individual	575/52/66	IP44/IP20	A	>> 388286
8	3000	700	OPAL		individual	575/52/66	IP44/IP20	A	>> 388606
16	4000	1400	OPAL	yes	individual	1136/52/66	IP44/IP20	A	>> 388316
16	3000	1400	OPAL	yes	individual	1136/52/66	IP44/IP20	A	>> 388637
16	3000	1400	OPAL		individual	1136/52/66	IP44/IP20	A	>> 388620
16	4000	1400	OPAL		individual	1136/52/66	IP44/IP20	A	>> 388309

ELEGANTE LED SYSTEM INDIVIDUAL VARIANT 30W/15W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	DIMM DALI	Version	Dimensions [mm]	Ingress protection	Energy efficiency class	Index
15	4000	1200	OPAL	yes	individual	575/52/66	IP44/IP20	A	>> 388255
15	3000	1200	OPAL	yes	individual	575/52/66	IP44/IP20	A	>> 388576
15	4000	1200	OPAL		individual	575/52/66	IP44/IP20	A	>> 388248
15	3000	1200	OPAL		individual	575/52/66	IP44/IP20	A	>> 388569
30	4000	2400	OPAL	yes	individual	1136/52/66	IP44/IP20	A	>> 388279
30	3000	2400	OPAL	yes	individual	1136/52/66	IP44/IP20	A	>> 388590
30	4000	2400	OPAL		individual	1136/52/66	IP44/IP20	A	>> 388262
30	3000	2400	OPAL		individual	1136/52/66	IP44/IP20	A	>> 388583

*Tolerance +/- 10%


ACCESSORIES

Name	Index
ELEGANTE LED SYSTEM - klosz OPAL- 1 mb (max 25 mb) / OPAL diffuser - 1 rm (max 25 rm)	81000945

ELEGANTE LED SYSTEM



LUMINOUS INTENSITY DISTRIB. CURVE

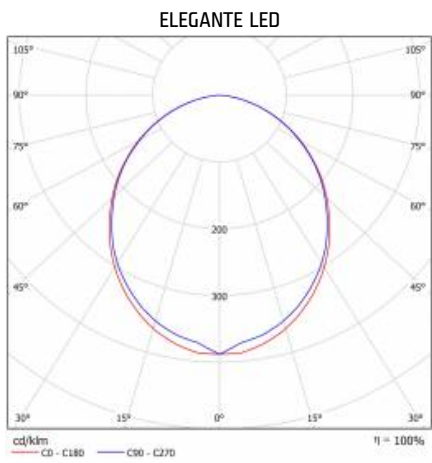

TUBE LED EVO 2

GENERAL CARD



TECHNICAL PARAMETERS

Ingress protection:	IP65
Impact resistance:	IK08
Nominal power [W]:	14.00 - 36.00
Luminous flux [lm]*:	1350 - 4200
Colour temperature [K]:	4000
Colour rendering index:	>80
SDCM:	≤ 3
Energy efficiency class:	E; F
Material of the body:	PC
Diffuser type:	transparent
Optics material:	PMMA
Optics:	lens
Mounting version:	surface, suspended
Dimensions (H/W/T/S) [mm]:	42/45/1065; 42/45/1346; 42/45/1626; 42/45/785
Warranty [years]:	5

CHARACTERISTICS

LED luminaire system designed for suspended and surface mounting on walls and ceilings. Provides a combination of high illumination parameters and functionality. With its slim diameter of 42 mm possible to mount in hard-to-reach locations. Mounting is easy and quick. Due to the line lens, it is possible to adjust the fitting to different lighting requirements – three light distribution options: 90°, 60°, 30°.

APPLICATION

Luminaire intended for both outdoor and indoor use in industry areas and passageways. Provides good surface lighting and is perfect in situations that require eyesight concentration. Four housing sizes available. Suitable for mounting in all types of suspended ceilings (modular, plasterboard).

TUBE LED EVO 2

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

TUBE LED EVO 2 14W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Beam angle [°]	DIMM DALI	Through wiring	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
14	4000	1350	transparent	30		LS1	42/45/785	F	>> 269103
14	4000	1350	transparent	30		LS2	42/45/785	F	>> 269134
14	4000	1700	transparent	60		LS1	42/45/785	E	>> 269110
14	4000	1700	transparent	60		LS2	42/45/785	E	>> 269141
14	4000	1600	transparent	90		LS2	42/45/785	E	>> 269158
14	4000	1600	transparent	90		LS1	42/45/785	E	>> 269127

TUBE LED EVO 2 21W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Beam angle [°]	DIMM DALI	Through wiring	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
21	4000	2000	transparent	30		LS1	42/45/1065	F	>> 269165
21	4000	2000	transparent	30		LS2	42/45/1065	F	>> 269196
21	4000	2000	transparent	30	yes	LS1	42/45/1065	F	>> 267666
21	4000	2000	transparent	30	yes	LS2	42/45/1065	F	>> 267697
21	4000	2500	transparent	60		LS1	42/45/1065	E	>> 269172
21	4000	2500	transparent	60		LS2	42/45/1065	E	>> 269202
21	4000	2500	transparent	60	yes	LS1	42/45/1065	E	>> 267673
21	4000	2500	transparent	60	yes	LS2	42/45/1065	E	>> 267703
21	4000	2350	transparent	90		LS1	42/45/1065	E	>> 269189
21	4000	2350	transparent	90		LS2	42/45/1065	E	>> 269219
21	4000	2350	transparent	90	yes	LS1	42/45/1065	E	>> 267680
21	4000	2350	transparent	90	yes	LS2	42/45/1065	E	>> 267710

TUBE LED EVO 2 28W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Beam angle [°]	DIMM DALI	Through wiring	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
28	4000	2650	transparent	30		LS1	42/45/1346	F	>> 269226
28	4000	2650	transparent	30		LS2	42/45/1346	F	>> 269257
28	4000	2650	transparent	30	yes	LS1	42/45/1346	F	>> 267727
28	4000	2650	transparent	30	yes	LS2	42/45/1346	F	>> 267758
28	4000	3300	transparent	60		LS1	42/45/1346	E	>> 269233
28	4000	3300	transparent	60		LS2	42/45/1346	E	>> 269264
28	4000	3300	transparent	60	yes	LS1	42/45/1346	E	>> 267734
28	4000	3300	transparent	60	yes	LS2	42/45/1346	E	>> 267765
28	4000	3100	transparent	90		LS1	42/45/1346	E	>> 269240

TUBE LED EVO 2

GENERAL CARD

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Beam angle [°]	DIMM DALI	Through wiring	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
28	4000	3100	transparent	90		LS2	42/45/1346	E	>> 269271
28	4000	3100	transparent	90	yes	LS1	42/45/1346	E	>> 267741
28	4000	3100	transparent	90	yes	LS2	42/45/1346	E	>> 267772


TUBE LED EVO 2 36W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Beam angle [°]	DIMM DALI	Through wiring	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
36	4000	3350	transparent	30		LS1	42/45/1626	F	>> 269288
36	4000	3350	transparent	30		LS2	42/45/1626	F	>> 269318
36	4000	3350	transparent	30	yes	LS1	42/45/1626	F	>> 267789
36	4000	3350	transparent	30	yes	LS2	42/45/1626	F	>> 267819
36	4000	4200	transparent	60		LS1	42/45/1626	E	>> 269295
36	4000	4200	transparent	60		LS2	42/45/1626	E	>> 269325
36	4000	4200	transparent	60	yes	LS1	42/45/1626	E	>> 267796
36	4000	4200	transparent	60	yes	LS2	42/45/1626	E	>> 267826
36	4000	3950	transparent	90		LS1	42/45/1626	E	>> 269301
36	4000	3950	transparent	90		LS2	42/45/1626	E	>> 269332
36	4000	3950	transparent	90	yes	LS1	42/45/1626	E	>> 267802
36	4000	3950	transparent	90	yes	LS2	42/45/1626	E	>> 267833


TUBE LED EVO 2

GENERAL CARD


LUMINOUS INTENSITY DISTRIB. CURVE



TUBE LED EVO 30



TUBE LED EVO 60



TUBE LED EVO 90

TUBE LED EVO 2


GENERAL CARD

ACCESSORIES AVAILABLE


index	Name
267604	Tube LED EVO surface mounting bracket adjustable +/- 100 degrees
266591	Tube LED EVO electric suspension
266607	Tube LED EVO suspension cord
266829	Tube LED EVO Suspension (round box)
266492	Star connector TUBE LED EVO system
266485	Star connector TUBE LED EVO system matt white
266478	Star connector TUBE LED EVO system matt black



Tube LED EVO surface mounting bracket adjustable +/- 100 degrees (267604)




Tube LED EVO suspension cord (266607)



Star connector TUBE LED EVO system (266492)

SPECTO LED

GENERAL CARD

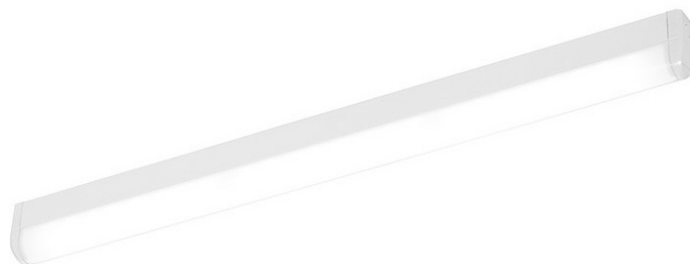

TECHNICAL PARAMETERS

Ingress protection:	IP40
Impact resistance:	IK02
Nominal power [W]:	8.00 - 40.00
Luminous flux [lm]*:	600 - 4400
Colour temperature [K]:	3000; 4000
Colour rendering index:	>80
Energy efficiency class:	A
Material of the body:	powder coated steel
Diffuser material:	PMMA
Diffuser type:	PRM; PRM MAT
Mounting version:	surface
Dimensions (H/W/T/S) [mm]:	1252/84/45; 1552/84/45; 642/84/45; 902/84/45
Warranty [years]:	2

CHARACTERISTICS

Surface ceiling or wall mounted, high performance LED luminaire with compact space saving construction. Equipped with energy saving light sources LED. Powderpainted steel base, special multilayer prismatic diffuser combining high UV resistance PMMA cover and polypropylene optic system or single layer high UV resistance opal PMMA diffuser.

APPLICATION

Multi-purpose LED luminaire designed for indoor application for illuminating public use areas and corridors (administration buildings, schools and universities, health care buildings) Especially recommended for small space application or as complementary lighting. It is appropriate for new applications as well as replacing conventional T8 & T5 fittings on energy saving LED solutions. Fitting construction adapted for surface mounting (ceiling or wall) using included accessory installation kit.

SPECTO LED

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

SPECTO LED 1252/84/45mm

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	DIMM DALI	Switch	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
16	4000	1650	PRM			1252/84/45	A	>> 343858
16	3000	1300	PRM MAT			1252/84/45	A	>> 343865
16	4000	1450	PRM MAT			1252/84/45	A	>> 343872
32	3000	3050	PRM			1252/84/45	A	>> 343889
32	4000	3300	PRM			1252/84/45	A	>> 343896
32	3000	2800	PRM MAT			1252/84/45	A	>> 343902
32	4000	3200	PRM MAT			1252/84/45	A	>> 343919

SPECTO LED 1552/84/45mm

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	DIMM DALI	Switch	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
20	4000	2250	PRM			1552/84/45	A	>> 343933
20	3000	1850	PRM MAT			1552/84/45	A	>> 343940
20	4000	2000	PRM MAT			1552/84/45	A	>> 343957
40	3000	4050	PRM			1552/84/45	A	>> 343643
40	4000	4400	PRM			1552/84/45	A	>> 343650
40	3000	3450	PRM MAT			1552/84/45	A	>> 343704
40	4000	3750	PRM MAT			1552/84/45	A	>> 343711

SPECTO LED 642/84/45mm

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	DIMM DALI	Switch	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
8	3000	700	PRM			642/84/45	A	>> 343605
8	4000	820	PRM			642/84/45	A	>> 343612
8	3000	600	PRM MAT			642/84/45	A	>> 343667
8	4000	700	PRM MAT			642/84/45	A	>> 343674
16	3000	1550	PRM			642/84/45	A	>> 343728
16	4000	1650	PRM			642/84/45	A	>> 343735
16	3000	1300	PRM MAT			642/84/45	A	>> 343742
16	4000	1400	PRM MAT			642/84/45	A	>> 343759


SPECTO LED 902/84/45mm

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	DIMM DALI	Switch	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
12	3000	1000	PRM MAT			902/84/45	A	>> 343780
12	4000	1050	PRM MAT			902/84/45	A	>> 343797
24	3000	2050	PRM MAT			902/84/45	A	>> 343827
24	4000	2200	PRM MAT			902/84/45	A	>> 343834


SPECTO LED

GENERAL CARD

LUMINOUS INTENSITY DISTRIB. CURVE




SPECTO LED 16W 3000K OPAL
1252mm



SPECTO LED 16W 3000K PRM
1252mm

SPECTO LED EVO

GENERAL CARD

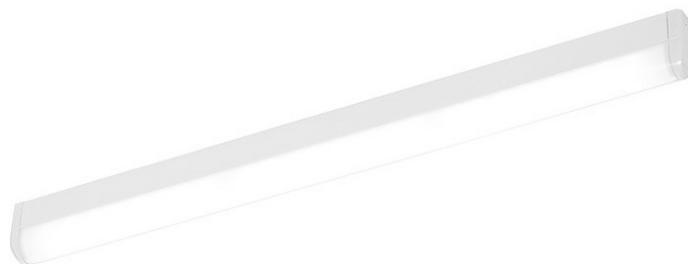

TECHNICAL PARAMETERS

Ingress protection:	IP40
Impact resistance:	IK02
Nominal power [W]:	15.00 - 36.00
Luminous flux [lm]*:	1350 - 3850
Colour temperature [K]:	3000; 4000
Colour rendering index:	>80
SDCM:	≤ 3
Energy efficiency class:	E; F
Material of the body:	steel
Diffuser material:	PMMA
Diffuser type:	PRM; PRM MAT
Mounting version:	surface
Dimensions (H/W/T/S) [mm]:	1200/45/84; 1500/45/84; 595/45/84; 900/45/84
Warranty [years]:	5

CHARACTERISTICS

Surface ceiling or wall mounted, high performance LED luminaire with compact space saving construction. Equipped with energy saving light sources LED. Powderpainted steel base, special multilayer prismatic diffuser combining high UV resistance PMMA cover and polypropylene optic system or single layer high UV resistance opal PMMA diffuser.

APPLICATION

Multi-purpose LED luminaire designed for indoor application for illuminating public use areas and corridors (administration buildings, schools and universities, health care buildings) Especially recommended for small space application or as complementary lighting. It is appropriate for new applications as well as replacing conventional T8 & T5 fittings on energy saving LED solutions. Fitting construction adapted for surface mounting (ceiling or wall) using included accessory installation kit.

SPECTO LED EVO

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

SPECTO LED EVO 1200/45/84mm

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
29	4000	2800	PRM MAT	1200/45/84	F	>> 636455

SPECTO LED EVO 1500/45/84mm

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
36	3000	3850	PRM	1500/45/84	E	>> 636547
36	4000	3450	PRM MAT	1500/45/84	F	>> 636479

SPECTO LED EVO 595/45/84mm

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
15	3000	1650	PRM	595/45/84	E	>> 636486
15	4000	1750	PRM	595/45/84	E	>> 636400
15	3000	1350	PRM MAT	595/45/84	F	>> 636493
15	4000	1450	PRM MAT	595/45/84	F	>> 636417


SPECTO LED EVO 900/45/84mm

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
22	3000	1950	PRM MAT	900/45/84	F	>> 636516
22	4000	2100	PRM MAT	900/45/84	F	>> 636431


SPECTO LED EVO

GENERAL CARD

LUMINOUS INTENSITY DISTRIB. CURVE



SPECTO LED EVO PRM



SPECTO LED EVO PRM MAT

LINEA 3 LED

GENERAL CARD



TECHNICAL PARAMETERS

Ingress protection:	IP40
Impact resistance:	IK06
Rated power of the luminaire [W]*:	15.00 - 155.00
Luminous flux [lm]*:	2150 - 21000
Colour temperature [K]:	4000
SDCM:	≤ 3
Energy efficiency class:	C; D
Material of the body:	aluminium
Colour of the body:	grey
Optics material:	PMMA
Optics:	45; 60; 90
Mounting version:	surface, suspended
Dimensions (H/W/T/S) [mm]:	1680/47/52; 3360/47/52

CHARACTERISTICS

LINEA 3 LED is a system of suspended and surface-mounted NEXT-GEN lighting lines, which is a new generation of lamps dedicated to LED technology. An innovative connection system and through wiring allow quick connection of luminaires into a lighting line. The construction used allows for easy installation and connection of the power supply. The body, made from scratch, made of aluminum profile, and subjected to anodization process, provides the luminaire with strength and solidity, and the narrow side profile allows installation in hard-to-reach places. LEDs from reputable manufacturers integrated with redesigned brand new LED modules have an impact on very high luminous efficacy. This guarantees that the required lighting level is achieved and that significant energy savings are achieved. The optical system is made of UV-resistant PMMA. Thanks to the use of linear lenses it is possible to adapt to different lighting requirements - 3 distribution angles: 90, 60, 45.

APPLICATION

Particularly well suited for indoor use. Dedicated as the primary light source for commercial facilities, manufacturing plants, and warehouses. It is appropriate for new applications as well as replacing conventional T8 & T5 fittings on energy-saving LED solutions.

LINEA 3 LED

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

LINEA 3 LED 1680/47/52mm

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Optics	DIMM DALI	Through wiring	Dimensions (H/W/T/S) [mm]	Index
15	4000	2150	45	yes	7x2,5	1680/47/52	>> 974014
15	4000	2150	60	yes	7x2,5	1680/47/52	>> 974038
15	4000	2150	90	yes	7x2,5	1680/47/52	>> 974052
15	4000	2150	45		5x2,5	1680/47/52	>> 974007
15	4000	2150	60		5x2,5	1680/47/52	>> 974021
15	4000	2150	90		5x2,5	1680/47/52	>> 974045
25	4000	3600	45	yes	7x2,5	1680/47/52	>> 974076
25	4000	3600	60	yes	7x2,5	1680/47/52	>> 974090
25	4000	3600	90	yes	7x2,5	1680/47/52	>> 974113
25	4000	3600	45		5x2,5	1680/47/52	>> 974069
25	4000	3600	60		5x2,5	1680/47/52	>> 974083
25	4000	3600	90		5x2,5	1680/47/52	>> 974106
38	4000	5300	45	yes	7x2,5	1680/47/52	>> 974137
38	4000	5300	60	yes	7x2,5	1680/47/52	>> 974151
38	4000	5300	90	yes	7x2,5	1680/47/52	>> 974175
38	4000	5300	45		5x2,5	1680/47/52	>> 974120
38	4000	5300	60		5x2,5	1680/47/52	>> 974144
38	4000	5300	90		5x2,5	1680/47/52	>> 974168
54	4000	7600	45	yes	7x2,5	1680/47/52	>> 974199
54	4000	7600	60	yes	7x2,5	1680/47/52	>> 974212
54	4000	7600	90	yes	7x2,5	1680/47/52	>> 974236
54	4000	7600	45		5x2,5	1680/47/52	>> 974182
54	4000	7600	60		5x2,5	1680/47/52	>> 974205
54	4000	7600	90		5x2,5	1680/47/52	>> 974229
77	4000	10500	45	yes	7x2,5	1680/47/52	>> 974250
77	4000	10500	60	yes	7x2,5	1680/47/52	>> 974274
77	4000	10500	90	yes	7x2,5	1680/47/52	>> 974298
77	4000	10500	45		5x2,5	1680/47/52	>> 974243
77	4000	10500	60		5x2,5	1680/47/52	>> 974267
77	4000	10500	90		5x2,5	1680/47/52	>> 974281

LINEA 3 LED 3360/47/52mm

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Optics	DIMM DALI	Through wiring	Dimensions (H/W/T/S) [mm]	Index
30	4000	4300	45	yes	7x2,5	3360/47/52	>> 974311

LINEA 3 LED


GENERAL CARD

Rated power of the luminaire [W]*	Colour temperature [K]	Luminous flux [lm]*	Optics	DIMM DALI	Through wiring	Dimensions (H/W/T/S) [mm]	Index
30	4000	4300	60	yes	7x2,5	3360/47/52	>> 974335
30	4000	4300	90	yes	7x2,5	3360/47/52	>> 974359
30	4000	4300	45		5x2,5	3360/47/52	>> 974304
30	4000	4300	60		5x2,5	3360/47/52	>> 974328
30	4000	4300	90		5x2,5	3360/47/52	>> 974342
51	4000	7100	45	yes	7x2,5	3360/47/52	>> 974373
51	4000	7100	60	yes	7x2,5	3360/47/52	>> 974397
51	4000	7100	90	yes	7x2,5	3360/47/52	>> 974410
51	4000	7100	45		5x2,5	3360/47/52	>> 974366
51	4000	7100	60		5x2,5	3360/47/52	>> 974380
51	4000	7100	90		5x2,5	3360/47/52	>> 974403
76	4000	10500	45	yes	7x2,5	3360/47/52	>> 974434
76	4000	10500	60	yes	7x2,5	3360/47/52	>> 974458
76	4000	10500	90	yes	7x2,5	3360/47/52	>> 974472
76	4000	10500	45		5x2,5	3360/47/52	>> 974427
76	4000	10500	60		5x2,5	3360/47/52	>> 974441
76	4000	10500	90		5x2,5	3360/47/52	>> 974465
108	4000	15200	45	yes	7x2,5	3360/47/52	>> 974496
108	4000	15200	60	yes	7x2,5	3360/47/52	>> 974519
108	4000	15200	90	yes	7x2,5	3360/47/52	>> 974533
108	4000	15200	45		5x2,5	3360/47/52	>> 974489
108	4000	15200	60		5x2,5	3360/47/52	>> 974502
108	4000	15200	90		5x2,5	3360/47/52	>> 974526
155	4000	21000	45	yes	7x2,5	3360/47/52	>> 974557
155	4000	21000	60	yes	7x2,5	3360/47/52	>> 974571
155	4000	21000	90	yes	7x2,5	3360/47/52	>> 974595
155	4000	21000	45		5x2,5	3360/47/52	>> 974540
155	4000	21000	60		5x2,5	3360/47/52	>> 974564
155	4000	21000	90		5x2,5	3360/47/52	>> 974588


LINEA 3 LED

GENERAL CARD


LUMINOUS INTENSITY DISTRIB. CURVE



Linea 3 LED 45D



Linea 3 Led 60D



Linea 3 Led 90D

LINEA 3 LED

GENERAL CARD

ACCESSORIES AVAILABLE

index	Name
974601	Linea 3 LED 1680mm - moduł LS2 5P
974618	Linea 3 LED 1680mm - moduł LS2 7P
974625	Linea 3 LED 3340mm - moduł LS2 5P
974632	Linea 3 LED 3340mm - moduł LS2 7P
974649	Linea 3 LED - closing set

LINEA 2 LED

GENERAL CARD



TECHNICAL PARAMETERS

Ingress protection:	IP20
Impact resistance:	IK06
Nominal power [W]:	14.00 - 146.00
Luminous flux [lm]*:	2250 - 22100
Colour temperature [K]:	4000
SDCM:	≤ 3
Electrical protection class:	I
Energy efficiency class:	B; C
Material of the body:	aluminium
Colour of the body:	grey
Optics material:	PMMA
Optics:	lens
Beam angle [°]:	45; 60; 90
Mounting version:	surface, suspended
Dimensions (H/W/T/S) [mm]:	47/52/1680; 47/52/3360
Warranty [years]:	5

CHARACTERISTICS

LINEA 2 LED is a system of suspended and surface-mounted NEXT GEN lighting line, which is a new generation of lamps dedicated to LED technology. Innovative connection system and through wiring allow quick connection of luminaires into a lighting line. The construction used allows for easy installation and connection of the power supply. The body, made from scratch, made of aluminum profile and subjected to anodization process, provides the luminaire with strength and solidity, and the narrow side profile allows installation in hard-to-reach places. Leds from reputable manufacturer integrated with redesigned brand new modules have an impact on very high luminous efficacy: up to 157 lm/W. This guarantees that the required lighting level is achieved and that significant energy savings are achieved. The optical system is made of UV-resistant PMMA. Thanks to the use of linear lenses it is possible to adapt to different lighting requirements - 3 distribution angles: 90, 60, 45.

APPLICATION

Particularly well suited for indoor use. Dedicated as the primary light source for commercial facilities, manufacturing plants and warehouses. It is appropriate for new applications as well as replacing conventional T8 & T5 fittings on energy-saving LED solutions.

LINEA 2 LED

GENERAL CARD

AVAILABLE VERSIONS



Click index >>, to see details

LINEA 2 LED 14W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Beam angle [°]	DIMM DALI	Through wiring	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
14	4000	2250	45		LS2 5P	47/52/1680	B	>> 966002
14	4000	2250	60		LS2 5P	47/52/1680	B	>> 966026
14	4000	2250	90		LS2 5P	47/52/1680	B	>> 966040
14	4000	2250	45	yes	LS2 7P	47/52/1680	B	>> 966019
14	4000	2250	60	yes	LS2 7P	47/52/1680	B	>> 966033
14	4000	2250	90	yes	LS2 7P	47/52/1680	B	>> 966057

LINEA 2 LED 24W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Beam angle [°]	DIMM DALI	Through wiring	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
24	4000	3750	45		LS2 5P	47/52/1680	C	>> 966064
24	4000	3750	60		LS2 5P	47/52/1680	C	>> 966088
24	4000	3750	90		LS2 5P	47/52/1680	C	>> 966101
24	4000	3750	45	yes	LS2 7P	47/52/1680	C	>> 966071
24	4000	3750	60	yes	LS2 7P	47/52/1680	C	>> 966095
24	4000	3750	90	yes	LS2 7P	47/52/1680	C	>> 966118

LINEA 2 LED 28W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Beam angle [°]	DIMM DALI	Through wiring	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
28	4000	4500	45		LS2 5P	47/52/3360	B	>> 966347
28	4000	4500	60		LS2 5P	47/52/3360	B	>> 966361
28	4000	4500	90		LS2 5P	47/52/3360	B	>> 966385
28	4000	4500	45	yes	LS2 7P	47/52/3360	B	>> 966354
28	4000	4500	60	yes	LS2 7P	47/52/3360	B	>> 966378
28	4000	4500	90	yes	LS2 7P	47/52/3360	B	>> 966392

LINEA 2 LED 36W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Beam angle [°]	DIMM DALI	Through wiring	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
36	4000	5550	45		LS2 5P	47/52/1680	C	>> 966668
36	4000	5550	60		LS2 5P	47/52/1680	C	>> 966149
36	4000	5550	90		LS2 5P	47/52/1680	C	>> 966163
36	4000	5550	45	yes	LS2 7P	47/52/1680	C	>> 966675
36	4000	5550	60	yes	LS2 7P	47/52/1680	C	>> 966156
36	4000	5550	90	yes	LS2 7P	47/52/1680	C	>> 966170

LINEA 2 LED

GENERAL CARD

LINEA 2 LED 48W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Beam angle [°]	DIMM DALI	Through wiring	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
48	4000	7500	45		LS2 5P	47/52/3360	C	>> 966408
48	4000	7500	60		LS2 5P	47/52/3360	C	>> 966422
48	4000	7500	90		LS2 5P	47/52/3360	C	>> 966446
48	4000	7500	45	yes	LS2 7P	47/52/3360	C	>> 966415
48	4000	7500	60	yes	LS2 7P	47/52/3360	C	>> 966439
48	4000	7500	90	yes	LS2 7P	47/52/3360	C	>> 966453

LINEA 2 LED 51W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Beam angle [°]	DIMM DALI	Through wiring	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
51	4000	8000	45		LS2 5P	47/52/1680	C	>> 966187
51	4000	8000	60		LS2 5P	47/52/1680	C	>> 966200
51	4000	8000	90		LS2 5P	47/52/1680	C	>> 966224
51	4000	8000	45	yes	LS2 7P	47/52/1680	C	>> 966194
51	4000	8000	60	yes	LS2 7P	47/52/1680	C	>> 966217
51	4000	8000	90	yes	LS2 7P	47/52/1680	C	>> 966682

LINEA 2 LED 72W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Beam angle [°]	DIMM DALI	Through wiring	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
72	4000	11100	45		LS2 5P	47/52/3360	C	>> 966460
72	4000	11100	60		LS2 5P	47/52/3360	C	>> 966484
72	4000	11100	90		LS2 5P	47/52/3360	C	>> 966507
72	4000	11100	45	yes	LS2 7P	47/52/3360	C	>> 966477
72	4000	11100	60	yes	LS2 7P	47/52/3360	C	>> 966491
72	4000	11100	90	yes	LS2 7P	47/52/3360	C	>> 966514

LINEA 2 LED 73W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Beam angle [°]	DIMM DALI	Through wiring	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
73	4000	11050	45		LS2 5P	47/52/1680	C	>> 966248
73	4000	11050	60		LS2 5P	47/52/1680	C	>> 966262
73	4000	11050	90		LS2 5P	47/52/1680	C	>> 966286
73	4000	11050	45	yes	LS2 7P	47/52/1680	C	>> 966255
73	4000	11050	60	yes	LS2 7P	47/52/1680	C	>> 966279
73	4000	11050	90	yes	LS2 7P	47/52/1680	C	>> 966293

LINEA 2 LED

GENERAL CARD

LINEA 2 LED 102W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Beam angle [°]	DIMM DALI	Through wiring	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
102	4000	16000	45		LS2 5P	47/52/3360	C	>> 966521
102	4000	16000	60		LS2 5P	47/52/3360	C	>> 966545
102	4000	16000	90		LS2 5P	47/52/3360	C	>> 966569
102	4000	16000	45	yes	LS2 7P	47/52/3360	C	>> 966538
102	4000	16000	60	yes	LS2 7P	47/52/3360	C	>> 966552
102	4000	16000	90	yes	LS2 7P	47/52/3360	C	>> 966576


LINEA 2 LED 146W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Beam angle [°]	DIMM DALI	Through wiring	Dimensions (H/W/T/S) [mm]	Energy efficiency class	Index
146	4000	22100	45		LS2 5P	47/52/3360	C	>> 966583
146	4000	22100	60		LS2 5P	47/52/3360	C	>> 966606
146	4000	22100	90		LS2 5P	47/52/3360	C	>> 966620
146	4000	22100	45	yes	LS2 7P	47/52/3360	C	>> 966590
146	4000	22100	60	yes	LS2 7P	47/52/3360	C	>> 966613
146	4000	22100	90	yes	LS2 7P	47/52/3360	C	>> 966637


LINEA 2 LED

GENERAL CARD


LUMINOUS INTENSITY DISTRIB. CURVE



LINEA 2 LED 45D



LINEA 2 LED 60D




LINEA 2 LED 90D

LINEA 2 LED

GENERAL CARD

ACCESSORIES AVAILABLE

index	Name
966309	LINEA 2 LED 1680mm - LS2 5P blank module
966316	LINEA 2 LED 1680mm - LS2 7P blank module
966644	LINEA 2 LED 3360mm - LS2 5P blank module
966651	LINEA 2 LED 3360mm - LS2 7P blank module
966323	LINEA 2 LED - closing set
966330	LINEA 2 LED - 840mm cover



LINEA 2 LED - closing set (966323)

По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231	Казань (843)206-01-48	Новокузнецк (3843)20-46-81	Смоленск (4812)29-41-54
Архангельск (8182)63-90-72	Калининград (4012)72-03-81	Новосибирск (383)227-86-73	Сочи (862)225-72-31
Астрахань (8512)99-46-04	Калуга (4842)92-23-67	Омск (3812)21-46-40	Ставрополь (8652)20-65-13
Барнаул (3852)73-04-60	Кемерово (3842)65-04-62	Орел (4862)44-53-42	Сургут (3462)77-98-35
Белгород (4722)40-23-64	Киров (8332)68-02-04	Оренбург (3532)37-68-04	Тверь (4822)63-31-35
Брянск (4832)59-03-52	Краснодар (861)203-40-90	Пенза (8412)22-31-16	Томск (3822)98-41-53
Владивосток (423)249-28-31	Красноярск (391)204-63-61	Пермь (342)205-81-47	Тула (4872)74-02-29
Волгоград (844)278-03-48	Курск (4712)77-13-04	Ростов-на-Дону (863)308-18-15	Тюмень (3452)66-21-18
Вологда (8172)26-41-59	Липецк (4742)52-20-81	Рязань (4912)46-61-64	Ульяновск (8422)24-23-59
Воронеж (473)204-51-73	Магнитогорск (3519)55-03-13	Самара (846)206-03-16	Уфа (347)229-48-12
Екатеринбург (343)384-55-89	Москва (495)268-04-70	Санкт-Петербург (812)309-46-40	Хабаровск (4212)92-98-04
Иваново (4932)77-34-06	Мурманск (8152)59-64-93	Саратов (845)249-38-78	Челябинск (351)202-03-61
Ижевск (3412)26-03-58	Набережные Челны (8552)20-53-41	Севастополь (8692)22-31-93	Череповец (8202)49-02-64
Иркутск (395)279-98-46	Нижний Новгород (831)429-08-12	Симферополь (3652)67-13-56	Ярославль (4852)69-52-93
Россия (495)268-04-70	Киргизия (996)312-96-26-47	Казахстан (7172)727-132	